# Mounting Installation Instructions

#### **What You Need:**

(fasteners not supplied)

Philips head screw driver or Philips head bit Driver for fasteners Fasteners to attach mounting to wall surface



Ą

Always turn off the power to the sign prior to opening the cabinet. Disconnect the power wires going to the sign.


**Note:** Clear all metal chips created by drilling into sign cabinet.


**Note:** Do not overtighten fasteners or distort back panel.

**Note:** Make appropriate wiring connections per local codes.

## **Center/Double Post Mount**

- **Step 1.** Bolt baseplate(s) to pad or bury post(s) as appropriate for location.
- **Step 2.** Slide mounting bracket on sign into post channel(s).
- **Step 3.** Align the cabinet flush with top of the post(s).
- **Step 4.** Tighten the set screw in the mounting bracket(s) and fasten the post cap(s) on the post(s).



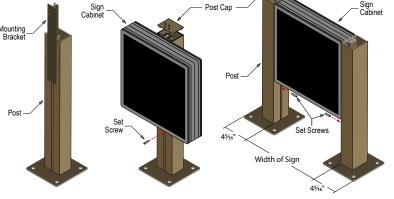


# Side/Ceiling Mount for 21/4" & 21/2"d Frames


- **Step 1.** Open sign by removing the screws on bottom of cabinet. Remove the back panel.
- Step 2. Knock out appropriate mounting holes in the back panel. Align back panel mounting holes with long side of brackets and screw in place.

(fasteners provided)

- Step 3. Mount the shorter side of the brackets to the wall or ceiling surface.

  (fasteners not supplied)
- Step 4. Hinge sign on to back panel, close cabinet and replace the screws that were removed in the first step.



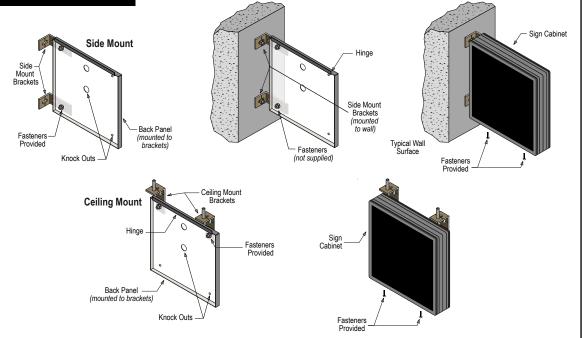


## **Dual Angle Mount**

**Step 1.** Open sign by removing the screws on the bottom of the cabinet.




One bracket, two viewing angles. Custom angles available.


**Step 2.** Mount the angle bracket to the desired surface. (fasteners not supplied)



**Step 3.** Mount the sign back panel to the angle bracket. (fasteners not supplied)




**Step 4.** Hinge sign on back panel and replace the screws that were removed in the first step.



### **Recessed Frame Mount**

- **Step 1.** Open sign by removing the screws on bottom lip of cabinet.
- Step 2. Slide the Recessed Frame over the cabinet flush with the sign face. Drill into the cabinet using the holes in the Recessed Frame. Fasten frame to cabinet sides.
- Step 3. Clear all aluminum chips from inside cabinet after drilling. Close cabinet and replace removed screws. Slide cabinet with frame into wall cavity.
- **Step 4.** Secure frame and cabinet in wall cavity using appropriate fastening hardware or silicone adhesive between the frame and substrate.

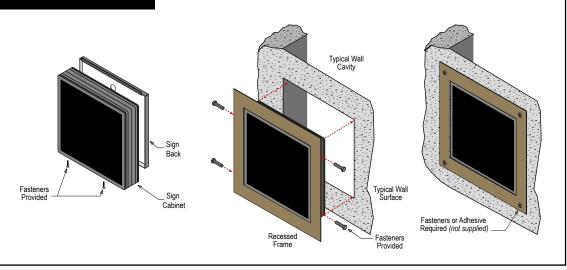

#### Side/Ceiling Mount for 51/2" & 71/2"d Frames Fasteners Required (not supplied) Step 1. Remove the mounting brackets from their shipping location on the sign cabinet. Fasteners Step 2. Align the long side of the brackets to the predrilled holes in the frame and secure with Bracket Shipping the hardware provided. (fasteners provided) Step 3. Mount the shorter side of the brackets to the wall or ceiling surface. (fasteners not supplied) Sign Face Bracket For 71/2"d For 51/2"d **Frames Frames** 3.275 Fasteners Fasteners Required (not supplied) Provided

