

## **EAGO**

EAGO Sanitary Ware Co.,Ltd.

Factory Add: Shilling Development Zone, Xiaotang Town, Nanhai District, Foshan City, Guangdong, China National Service Hotline 800-8301359


# **EAGO**

DZ959F8/DZ960F8 Installation Instruction

## Important safe information

- 1. Please read this instruction and assemble the steam shower according to it.
- The leakage protection switch must be installed. Besides, please try it to check whether it is safe enough before formal using.
- 3. The ground line of the product must be connected to the earth permanently.
- 4. To avoid being shocked by the electricity, please prepare enough plugs and fixed them near to the steam shower. Please change those old or disrepair wires in time.
- It is strictly forbidden to use the steam shower after drink or eat some hypnotic medicine.
- 6. Children should be guided by parents while using.
- 7. Especially note: The using water temperature should not pass 60 centigrade or 140 Fahrenheit
- Do not use any strong chemical liquid such as Vitriol, Hydrochloric acid, Lye and so on to clean the steam shower.
- 9. There is a connecting screw in the Wire Connecting Box, to avoid being shocked by the electricity, please be sure to connect this screw to the ground wire which is fixed on the power board. It is better to use the same size insulated wire to connect them, and the connecting wire diameter should not less than 1.5 square millimeter cooper-core wire.
- Warning: To avoid being shocked by the electricity, please be sure to connect the DFCI/RCD to the ground plug.
- 11. If the steam shower with 3KW/4.5KW/6KW steam generator, the diameters of wires which are used not less than 2.5squre millimeter/ 4squre millimeter/ 6squre millimeter.
- 12. It is not allowed to use any moisture enhancing machine in the steam shower.

## Installation wiring diagram

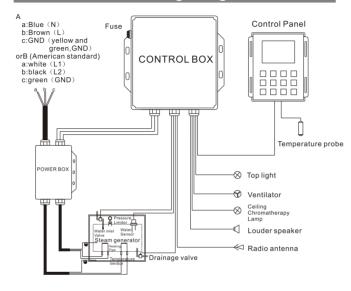


Electrical parts specification								
Configuration Parameter	massage pump	steam generator	ceiling light	exhausting fan	Solenoid valves	CPU	Speaker	Note
Rating voltage		AC220-240V/50HZ	DC12V	DC12V	DC12V	AC220-240V/ 50HZ		
Rating voltage		AC240V/60HZ	DC12V	DC12V	DC12V	AC240V/60HZ		
Rating power		3000VV	10VV	3W	5W		10W	
Rating power		4500VV	10VV	3W	5W		10W	
Rating power		6000VV	10W	3W	5W		10W	

# CONTENTS

01-02	Component Directions
03	Technical Drawing
04-10	Installation steps
11-12	Control panel keys and function directions
13	Illustration for cleaning function
14	Maintenance service card
16	Troubles shooting

Parts instruction

01

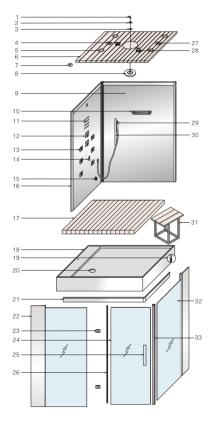




## Parts instruction




## Parts package




## Technical drawing for water and electricity

Size: DZ959:1200X900X2265mm ( Left side ) DZ960:1000X900X2265mm ( Left side )

03




DZ959 1200 DZ960 1000



### Installation instruction 1

Install the shower base


- 1. Take the shower base out from the carton and put it on the floor carefully.
- Put the level ruler on the shower base to check whether the shower base is level. If not, please use a Wrench to adjust the adjusting legs to make the shower base become level. Illustrated in the drawing A.



## Installation instruction 2


Install the back panels

- Take the No. 1 side back panel out of the carton and put it on the shower base carefully. Please be sure to make one person to stand beside to hold it on safely.
- 2. Take the No.2 back panel out and put it beside of the No.1 panel carefully. Insert the No.2 panel to the aluminum profile of No.1 panel. Then make one person hold on the No.1 and the No.2 panels, the other person uses a Philip Screwdriver to fix them with 4x10mm self-locking screws. Illustrated in drawing B.



Install front fixed glass doors


- 1. Install the bottom rubber to the bottom of No.3 fixed door, illustrated in the drawing A, then cover the aluminum profile of the No.3 fixed door to the No.1 side back panel, and use 4x10mm self-locking screws to fix them, Illustrated in the drawing B.
- 2. Install the bottom rubber to the bottom of No.4 fixed door, illustrated in the drawing A, then cover the aluminum profile of the No.4 fixed door to the No.2 back panel, and use 4x10mm self-locking screws to fix them, Illustrated in the drawing B.

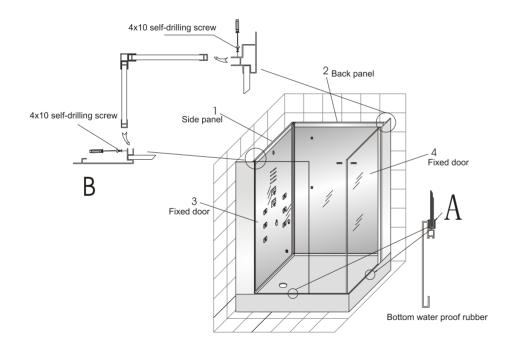

#### Installation instruction 4

Fix back panels and fixed doors

- 1. Put the two pieces of No.5 top aluminum profile on the top of No.3 fixed door and No.4 fixed door, use a phillip screwdriver to fix the 2pcs aluminum profiles together with 4x10mm self-locking screws, illustrated in the drawing E and then use a Phillip Screwdriver to fix the No.5 top aluminum profile to the No.1 side back panel and No.2 back panel with 4x50mm self-locking screws. Illustrated in the drawing C1 and C2.
- 2. Use a Phillip Screwdriver to fix the No.6 side aluminum profile to base skirt with 4x10mm self-locking screws, illustrated in the drawing A.
- 3. Use a Phillip Screwdriver to fix the No.2 back panel to the shower base with 4x16mm self-locking screws. Illustrated in the drawing B.

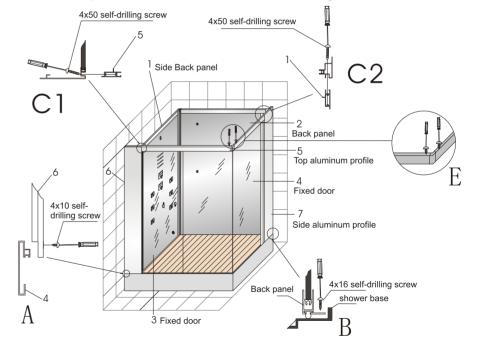


#### Install Movable Door.

- 1. Put the Top Cover on the top of the back panels and fixed doors, then use a Phillip Screwdriver to fix the Top Cover to the No.1 and No.2 back panels with 4x10mm self-locking screws and stainless steel block. Illustrated in the drawing A.
- 2. Use the Hexangular Wrench to fix the Movable Door to the No.3 fixed door with stainless steel hings and M5x12 screws.

Note: In case the Movable Door is not close well, please use a Hexangular Wrench to adjust the Stainless Steel Hinge, until it can close well. Illustrated in the drawing B.


3. Use the Hexangular Wrench to fix the Handle to the Movable Door. Illustrated in the drawing C.

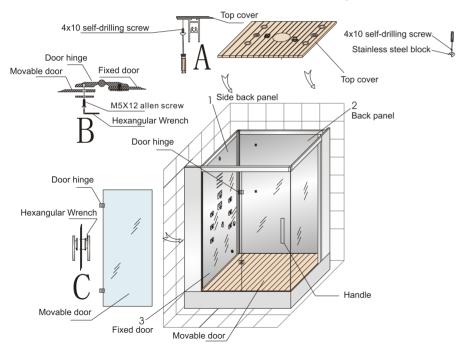

### Installation instruction 6

#### Install Accessories


- 1. Install the water proof rubber (picture A) to the top of the Movable Door.
- 2. Install the water proof rubber (picture B) to the Movable Door.
- 3. Install the water proof rubber (picture C) to the bottom of the Movable Door.
- 4. Install the magnetic strip (picture D) to the Movable Door and No.4 side fixed door.
- 5. Install the Up and Down Hand Shower Bracket: Use a Phillip Screwdriver to install the Up and Down Hand Shower Bracket to the back panel with 4x16mm screws, 4mm plastic cushion, 6mm plastic cushion and 4mm nuts. Illustrated in the drawing E.
- 6. Connect the hand shower chain to the hand shower socket. Illustrated in the drawing F.
- 7. Install the Glass Shelf: Use a Phillip Screwdriver to fix the Glass Clip to the back panel with 4x16mm screws, 4mm plastic cushion, 6mm plastic cushion and 4mm nuts, illustrated in the drawing G. Then put the Glass Shampoo Holder on the track of Glass Clip and use a Phillip Screwdriver to fix them well. Illustrated in the drawing I.

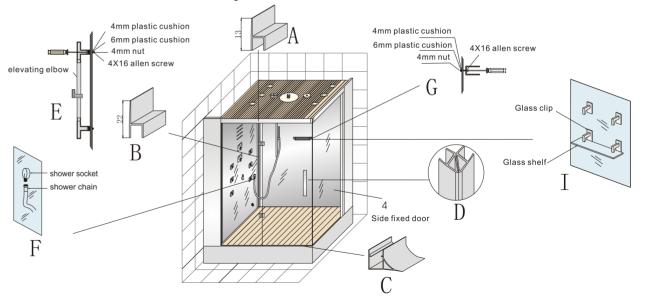

#### Installation instruction 7

#### Connect Wires

- 1. Insert the Single Side Rubber to the Top Aluminum Profile, illustrated in the drawing A.
- 2. Put the wood floor on the shower base carefully, and then put the stool on the wood floor.
- 3. Find out the Ventilator sign, the Lamp sign, and the Loud Speaker sign which are on the behind of the back panel, then connect the relative wires of these spare parts to the relative sockets. Illustrated in the following drawing.

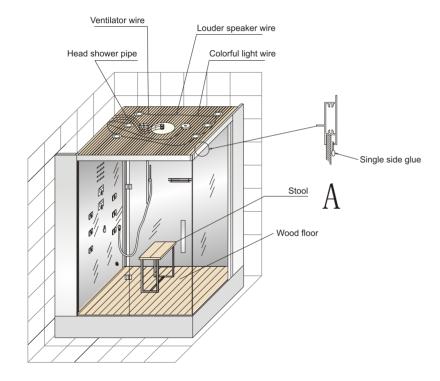

#### Installation instruction 8


Connect Fittings and Water Pipes


1. Connect the head shower pipe to the head shower joint. Connect the water outlet pipe to the shower base and connect the steam pipe to the steam outlet, illustrated in the drawing A.

Thermostatic

- 2. Connect the hot water inlet pipe and the cold water inlet pipe separately to the relative joints. Illustrated in drawing A, B and C.
- Especially note: The thermostatic faucet is an optional function, just when customers require to install this spare part and we will do, the standard steam shower is without the thermostatic function. Illustrated in drawing D and E.

Note: Before use the steam shower, please try to test whether all the functions are ok.




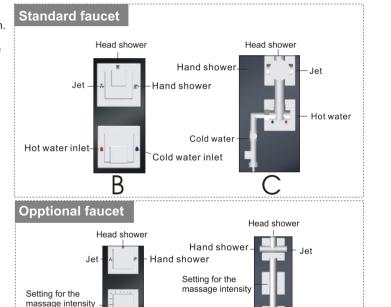

Thermostatic

setting

## F8 Control panel keys and operating instructions



#### 1).Power key

Press to switch on the steam compress on again to switch it off the steam comwilt shut will and which it off the steam comwilt shut will be added in the order of the start of

#### 2).Steam key

Press The steam generator starts working. The temperature will be shown on the control panel like the picture 2.



#### 3).Time adjusting


After the steam function is turned on, press 🕜 w

increase the setting time. When press the more than 1 second, the setting time will be increased continuously until you stop pressing. Or, just when it reaches the maximum limitting time (50 minutes) after that it will return to the minimum limitting time (5 minutes) autmotatically.

Note: The time setting range is between 5-50 minutes. The default time setting is 30 minutes. ( As picture3 )

#### 4). Temperature adjusting key

After steam function is turned on, press



increase the temperature. When press more than 1 second, the setting temperature will be increased continously until you stop pressing Or, just when it reaches the maximum limitting temperature that it will return to the minimum limitting temperature automatically.

Note: The temperature setting range is between 20 °C-50 °C. The controlled temperature tolerance: ±3°C The default temperature is 40°C.

#### 5). Ventilator key

Press to turn on the ventilator, press again to turn off the ventilator.



As picture5

# 6).Color light kev

Press to turn on the color light. After the color light is turned on, each more press will change the different colors of the light. The color light works in this sequence: Turn on, blue ---blue and red ----red and orange---orange ----orange and blue---blue---circulating---turn off.



#### 7).lamp key

Press the key to turn on the lamp, press again and turn it off. (As picture 6)

#### 8).Radio key

Press RADIO to turn on the radio, press RADIO again to turn off the radio.( As picture 7)



As picture7

#### 9).Channel memory key

Press MEM and release within 1 second, the frequency of current channel will be changed; Press MEM and hold it more than 1 second, the frequency of current channel will be saved. It can memory total 8 channels.

#### 10).Select kev

This key gets double functions. When the radio is turned on, this key shows the Frequency function. Press the key and it can be switched from the frequency to the volume function. Press the will show like the (Picture 10) or (picture 9). (Picture 9) is for volume and (picture 10) is for frequency.

F8 control panel key and operation instructio



As picture8

#### 11).Volume up key

After the radio is turned on (As picture9), press will increase the volume. Hold on the key more than 1 second, volume will keep increasing until the key is released. When( picture10) showes on the displayer, press will increase the frequency. Hold on the key more than 1 second, the frequency will keep increasing until the key is released.



As picture9

#### 12). Volume down key

After the radio is turned on, when (Picture 9) is shown on the displayer, press will decrease the volume. Hold on the key more than 1 second, volumed will keep decreasing until the key is released. When (picture10) is shown on the displayer,press will decrease the frequency Hold on the key more than 1 second



As pictur10

decrease the frequency. Hold on the key more than 1 second, the frequency will keep decreasing until the key is released.

## User's manual for cleaning the steem generator

Using steps: Turn off the power first, and then open the lid of cleanning cup, put the cleaning liquid in the cleanning cup, after that, cover the lid back. Now turn on the power, start the steam function to make the self-cleaning function work, later turn off the power, and pipe water away.

#### 1).Power off

For safety, it is strictly prohibited to open the lid of the easy cleaning cup during using. In order to avoid steam gas emits out and scald users, please shut down all other functions before using the steam generator (As picture 11)

#### 2).Open the easy cleaning cup

After Making sure all of functions are turned off, find out the cleaning cup according the right picture illustrated, and rotate the lid of the cleaning cup to the reverse direction, and then take the lid out slightly. (As picture 12)

#### 3).put the cleaning liquid

After openning the cleanning cup, use a spoon to take a proper amount of cleaning liquid, such as Citric acid, or neutral compound cleaning liquid ( around 5 ml) to put in the cleaning cup. Note: If the cleaning material is solid, first, please dissolve it with water to prevent blocking. Strictly prohibit to use any other acid, alkaline compounds to be pour ed into the cleanning cup directly (As picture 13).

#### 4).Cover the lid

After adding the cleaning liquid, cover the lid back and turn it in clockwise direction to fasten, like this can prevent the steam emitting out to scald users (As picture 14).

#### 5).Turn on and start the steam function

After covering the lid, press b to turn on the steam generator function, and the system b will begin to clean the steam box automatically.(As picture15)

#### 6). Turn off the power and drain out the waste water

After 5-10 minutes, press the to turn off the steam generator, then press the , the waste water will be drained out automatically( As picture16).







(As picture 122)



(As picture 183)



(As picture 144)



(As picture 155)



1.Strictly prohibit to use the cleaning function while any other function is on;
2. Strictly prohibit to use any other

alkaline cleaning compound to clean steam generator;
3. Strictly prohibit to use any solid cleaning agent to clean steam generator, in order to avoid blocking the pipe. We recommend that you use citric acid solution to clean steam

# Maintenance service card Item number Purchasing Serial number Phone number Eago guarantees to keep: Eago series' products in good repair against the maintenance service card and purchasing receipt since the purchasing date. If it is the product quality problem, it will be free maintenance or change the spare parts. If the problem is not caused by the products itself or over-exceed the one-year quarantee, it will charge the repairing fees and spare parts costs.

The first page is kept for the customer.

Maintenance service card		
Item number		
Serial number		
Customer name		
Phone number		
Address		
Agent shop		
Phone number		
Purchasing date		

The second page is sent back to eago head office.

Maintenance service card		
Item number		
Serial number		
Customer name		
Phone number		
Address		
Agent shop		
Phone number		
Purchasing date		

# Steam shower room trouble shooting

Malfunction Status	Reasons	Solutions		
Small volume inlet water	Lower inlet water pressure     The water inlet pipe is blocked	Check the inlet water pressure, then check with local plumber     Clean the filtre		
Water divert valve can't divert water   1. Rubber inside the valve damaged or distorted		1. Change a new one		
No signal on the control panel  1. There is no power in the user's house or the wire not connected well  2. Not switch the power on  3. The connecting wire for the control panel becomes loose		Need to wait the power on, connect wires in right way     Swtich on the power     Take it off and install it again, don't forget fasten it		
There is steam signal on the control panle, but no steam comes out  1. The Temperature limiter operate or the heater is broken		Ask help to qualified people		
Chromatherapy light doesn't the lamp holder loosen work 1. The connecting wire blew out or the lamp holder loosen 2. Lamp pannel is broken		Change a new one or install it well again     Change a new one		
Ventilator doesn't work  1. The connecting wire is off 2. The fan blade gets stuck 3. The ventilation fan is broken		Reconnect it well     When the fan is on spur the blades slightly     Change a new one		