



**BOULT AUDIO**

# **ANCHOR USER MANUAL**

For better sound quality experience, suggest use  
IOS 8.0/ Android 4.3 or above operating system.

Please refer to the **Safety Precautions** mentioned on the last page of this manual before operating this device.

## **BLUETOOTH CONNECTION**

---

### **Pairing**

You need to pair a BT device with the headphones in advance in order to enjoy listening to wireless music or make phone calls. You can connect to a BT device any time after it has been paired.

### **Pairing and Connecting a BT Device**


Check that the headphones are not connected to any BT device before pairing.

1-Turn on the BT function of your mobile device.



For details, see the Owner's Manual of the BT device that you want to connect.

When the headphones power is off, press and hold the control button for approximately 6 seconds.

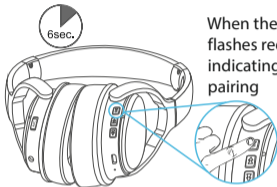

When the status indicator LED lights flashes red and blue alternately indicating that the headphones are in pairing

1- Select "Boult Audio **ANCHOR**" from the list of devices displayed on the screen of your BT device.




- When pairing is complete and a BT connection is established, the status indicator LED on the headphones lights blue for approximately 5 seconds.
- If the power is off, turn the power on before pairing.
- If you are requested to enter a PIN code (pass key), enter "0000" (four zeros).

## Opening The Box


---



**Audio Cable**



**USB Charging Cable**



**User Manual**




**Headphones**

## Turning The Power ON/OFF

---

Turn on the BT function of the BT device that you want to connect to before hand.

Press and hold the headphones' Power on/off button for approximately 3 second.

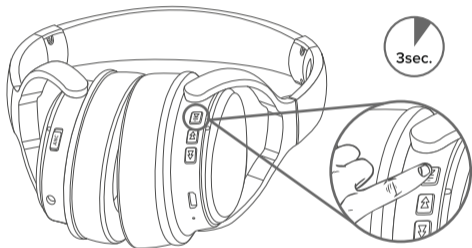


- A beep sound is heard and the status indicator LED lights red for approximately 1 second.

-The headphones automatically connect via BT to the BT device when the device is already paired with the headphones.

## Turning the power off

---

Press and hold the Power on/off button for approximately 5 seconds.

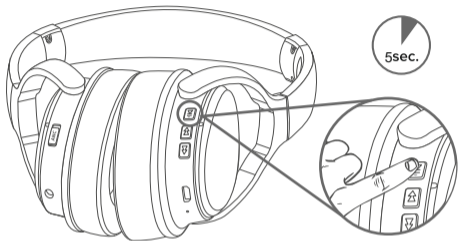


- "Power off" is heard and the status indicator LED lights purple for approximately 1 second.

### **Note**

- A small amount of power is consumed even when the power is off.

## Product Introduction

---

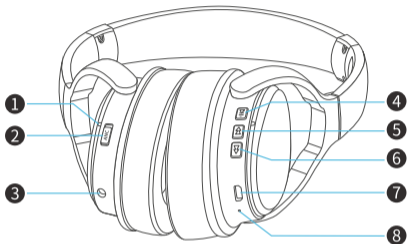

① LED Light

② ANC On/OFF Button

③ 3.5mm line-in Female

④ Power On/OFF

⑤ Volume+/Next

⑥ Volume-/Previous


⑦ USB charging port

⑧ Mic



## Charging & Battery

---

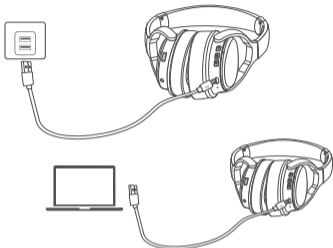Connect the headphones to a computer or USB AC adapter to Charge the battery.



The charging status can be checked from the status indicator LED on the headphones.

Charging Status	Status Indicator LED color
Charging	 Red Light
Fully Charged	 Red Light Off



- When using the headphones for the first time after purchase or when the remaining power of the rechargeable battery is low charge the battery.

### **Note**

- When the dedicated charging cable is connected to the headphones, the power of the headphones turns off and the mode becomes charging mode. Before use after charging, disconnect the cable from the headphones and turn on the power.
- When connecting the dedicated charging cable to the charging port, be sure to match the cable connector with the shape of the socket. Forcing the connector into the socket will cause damage.
- The rating of the charging output should be DC 5V, 2.4A or less.
- The usable time of the headphones differs depending on the temperature of the environment in which they are used and method of use.

## Features

---

Boult Audio **ANCHOR** has BT version 5.0 chip which supports Headset, Handsfree, HSP HFP A2DP and AVRCP protocols. That chip ensures the best possible connection between your earphones and the audio source.

### SOUND

Boult Audio **ANCHOR** has 40mm sound optimized high quality drivers which provides deep bass frequencies and crisp clear trebles.

### WIRELESS

Boult Audio **ANCHOR** has BT version 5.0 chip which supports headset, Handsfree, HSP HFP A2DP and AVRCP protocols. That chip ensures the best possible connection between your earphones and the audio source.















### COMFORT

**ANCHOR** designed for long listening hours. Super soft noise isolating earpads makes the Boult Audio **ANCHOR** extra comfortable. Adjustable headband covered with faux leather and soft cushion.

### DURABILITY

**ANCHOR** is more durable than it appears. The headband was made of metal construction under the artificial leather and cushions. It is as comfortable as durable.

## Listening Music

 Play / Pause	*  Press the key to play/stop music
 Volume + / next	*  Short press to increase the volume and top volume. *  Long press to move to the next music
 Volume - / Previous	*  Short press to decrease the volume and it will have reminding invoice when it get to top volume *  Long Press to move to the previous
 answer/stop Call	* When call come,  Press to answer the call, press the button again to stop call answer/stop call
 Reject call	* When call come, press  2-3 seconds
 answer/stop	*  Short press 2 times, call back the newest call phone number.

## Trouble Shooting

---

The BT function of the headphones does not switch on:

-When the rechargeable battery has no power remaining, connect the headphones to a computer using the supplied dedicated charging cable to charge the battery. When the dedicated charging cable is connected to the headphones, the power of the headphones turns off and the mode becomes charging mode. Before use after charging, disconnect the cable from the headphones and turn on the power.

### **Cannot pair a BT device:**

-Check that the power of the headphones is switched on.-Move the BT device that you want to connect closer to the headphones.

### **Cannot connect using BT:**

- Check that the power of the headphones is switched on.
- Check that the power of the BT device is on and the BT function is enabled.
- Check whether the BT device is in sleep status.
- Pair the devices again.

### **Sound is not output from the headphones when connected using BT:**

- Check that the power of the headphones is switched on.
- Check that the power of the BT device is on and the BT function is enabled.
- Select A2DP as the BT connection profile on the transmitting BT device. For details, see the Owner's Manual of the BT device.

- Check that audio is being played back on the BT device.
- Increase the volume. Increase the volume on the BT device if it is necessary to adjust the volume on the BT device.
- Pair the devices again.  
Cannot hear the caller's voice:
  - Check that the power of the headphones is switched on.
  - Check that the power of the BT device is on and the BT function is enabled.
  - Select HSP or HFP as the BT connection profile on the transmitting BT device. For details, see the Owner's Manual of the BT device.
  - Check that the BT device is setting handle calls through the headphones. For details, see the Owner's Manual of the BT device.
  - Increase the incoming call volume.


## Functions

---

### Ignoring an incoming call

Press and hold the call button for approximately 2 seconds when an incoming call is received.

### Voice Assistant

Press and hold  button for 2 seconds to activate the google voice assistant or siri.

## Specifications

BT Version	V5.0
Transforming distance	10m
Mic Frequency	100Hz-10KHz
Driver Frequency	20Hz-20KHz
Compatible Agreement	HSP, HFP, A2DP, AVRCP
Working voltage	5V DC
Charging Electric current	400mA
Charging time last	2 Hours
(Volume at 60%) Playing time	30Hours (wireless connecting only)
	30Hours (ANC function only)
	20Hours (with both Wireless connecting and ANC)

## Precautions for Use

---

Be sure to read the Owner's Manual of the device that want to connect.

- Check the volume settings when using the headphone on public transport or in public places and make sure you do not disturb people around you.

- These headphones are not guaranteed to work with all combinations of BT devices/mobile phones.

- These headphones do not support connection with all BT devices/mobile phones.

- BT wireless technology can communicate over a distance of approximately 10 m. However, obstructions(people, metallic objects, walls, etc.) and radio wave conditions affect the range in which communication is possible.

- The BT device that you want to connect must support the same profile as these headphones in order to use the BT function. For details on profiles that the BT device is compatible with, see the BT device Owner's Manual.

- Due to features of BT wireless technology, playback of audio on the headphones is slightly delayed compared to the voice/audio playback on the transmitting device.

## Disposal of Electrical Items

---

Disposal Of Electrical Items This marking shown on the product or its literature indicates that it should not be disposed with other household waste at the end of the lifespan.

To prevent possible harm to the environment or human health from in controlled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

Household users should contact either the retailer where the purchased the product or the local government office for details of Where and how can take this item for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes of disposal.

