





Brushed Brass
Pendant Light
Model Number:
LL-LTAAB


HARDWARE CONTENTS (Note: Hardware shown is not to scale)

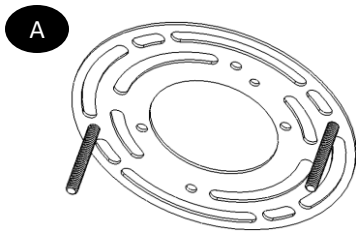


A Mounting Plate x 1




B Wire Nuts x 4

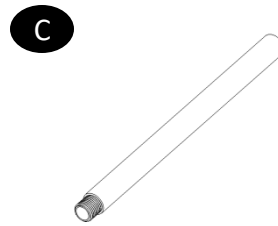


C 6 inch Down Rod x 2

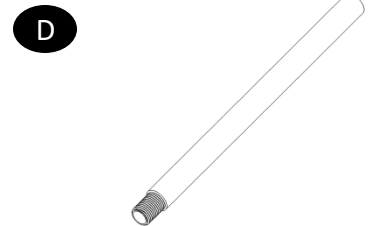


D 12 inch Down Rod x 2

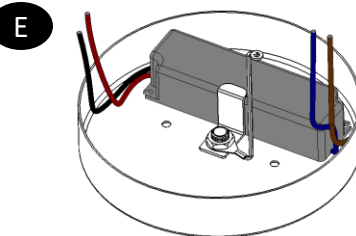


E Canopy x 1



F Canopy Locking Nuts x 2

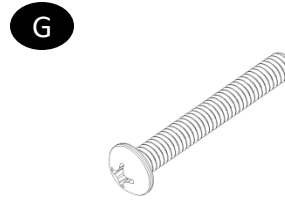

G Mounting Screws x 2

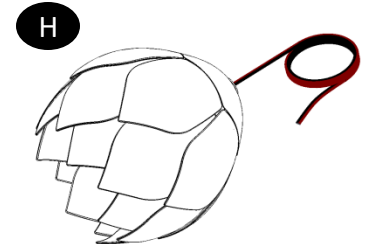

H Lotus Light Head x 1



SAFETY INFORMATION



Please read and understand this entire manual before attempting to assemble, operate or install the product.

WARNING!

Turn off electricity at the main fuse box (or circuit breaker box) before beginning installation by removing the fuse (or switching off the circuit breaker). Be careful not to damage or cut the wire insulation (covering) during fixture installation. Do not permit wires to contact any surface having a sharp edge. Doing so may damage or cut the wire insulation, which could cause serious injury or death from electric shock.

CAUTION

All electrical connections must be in agreement with local codes, ordinances, or the national electric code (NEC). Contact your municipal building department to learn about your local codes, permits, and or inspections. Do not connect this fixture to an electrical system that does not provide a means for equipment grounding. Never use a fixture in a two-wire system that is not grounded. If you are not sure your lighting system has a grounding means, do not attempt to install this fixture. Contact a qualified, licensed electrician for information with regard to proper grounding methods as required by the local electrical code in your area.


PREPARATION

Before beginning assembly, installation or operation of product, make sure all parts are present. Compare parts with package contents list and diagram on previous page. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts at customer@ourlivinglights.com

Tools required for assembly (not included):

- Slotted Screwdriver
- Phillips Screwdriver
- Wire Cutters
- Pliers
- Electrical Tape
- Wire Strippers
- Safety Glasses
- Ladder

ASSEMBLY INSTRUCTIONS

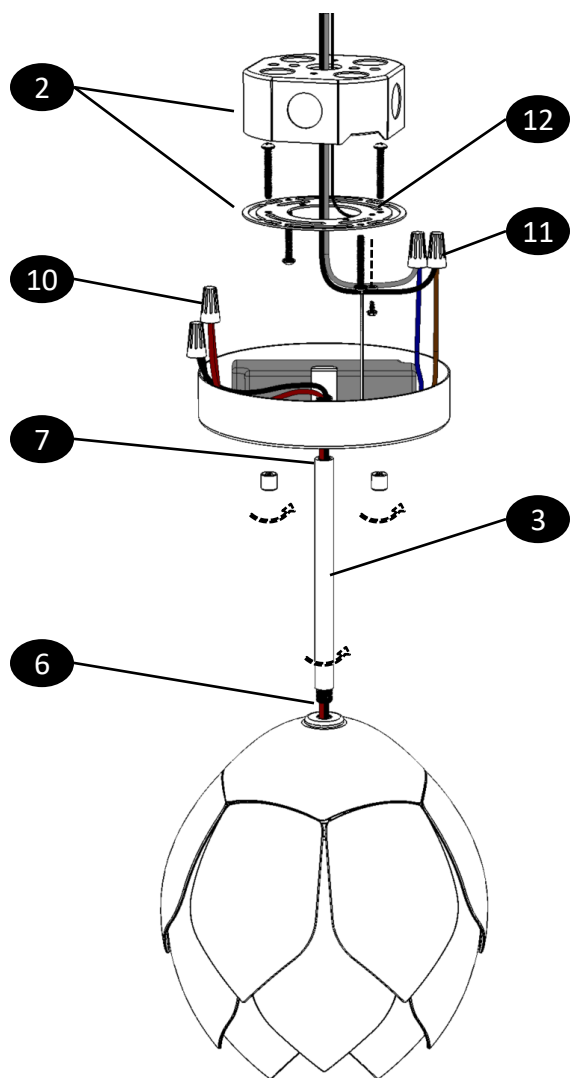

1. Turn off main power at the fuse or circuit box.
2. Fix the mounting plate A to the conduit/outlet box using the mounting screws G.
3. Determine the needed length of down rods (C and D) to achieve the desired length. *Additional down rods may be added if more length is desired upto a maximum length of 96 inches.*
4. Insert the lamp wire through the down rods, and the threaded rod in the canopy.
5. Screw the down rods together.
6. Screw the down rod to the lamp head.
7. Screw the down rod to the canopy.
8. Use Wire Cutter to cut off the excess RED and BLACK wires from the lamp. Ensure that you have enough wire length to connect the wires to the LED power supply.
9. Use Wire Stripper to expose the copper from the RED and BLACK wires.
10. Use Wire Nuts (B) to attach wires from Pendant light to the output side of the Power Supply.
11. Lift the Pendant Light to the Canopy and attach the BLUE and BROWN wires from the Power Supply to Line Power.
12. Attach the grounding strap from the canopy to the conduit box.
13. Insert the Lamp Fixture on the screws in the mounting plate A and use the canopy locking nuts to secure the lamp shade.
14. Turn on power at the fuse or circuit box.

OPERATION

At first startup, the light will be at 2700 K White Color Temperature and will start the Bloom operation. To change settings such as Brightness, Color, Bloom Speed and allowing multiple lights to sync together (via Grouping) Download the Living Lights App from Apple AppStore or Google Play Store.




Living
Lights



Use The Living Lights App to create an account, add your lighting fixture to your Wi-Fi network (2.4GHz or 5GHz) and enjoy full control and customization.


LIVING LIGHTS APP DASHBOARD

After adding your Living Light to the Wi-Fi, utilize the dashboard for easy control of Power, Brightness and Groups. We hope you enjoy Living Lights as much as we do.

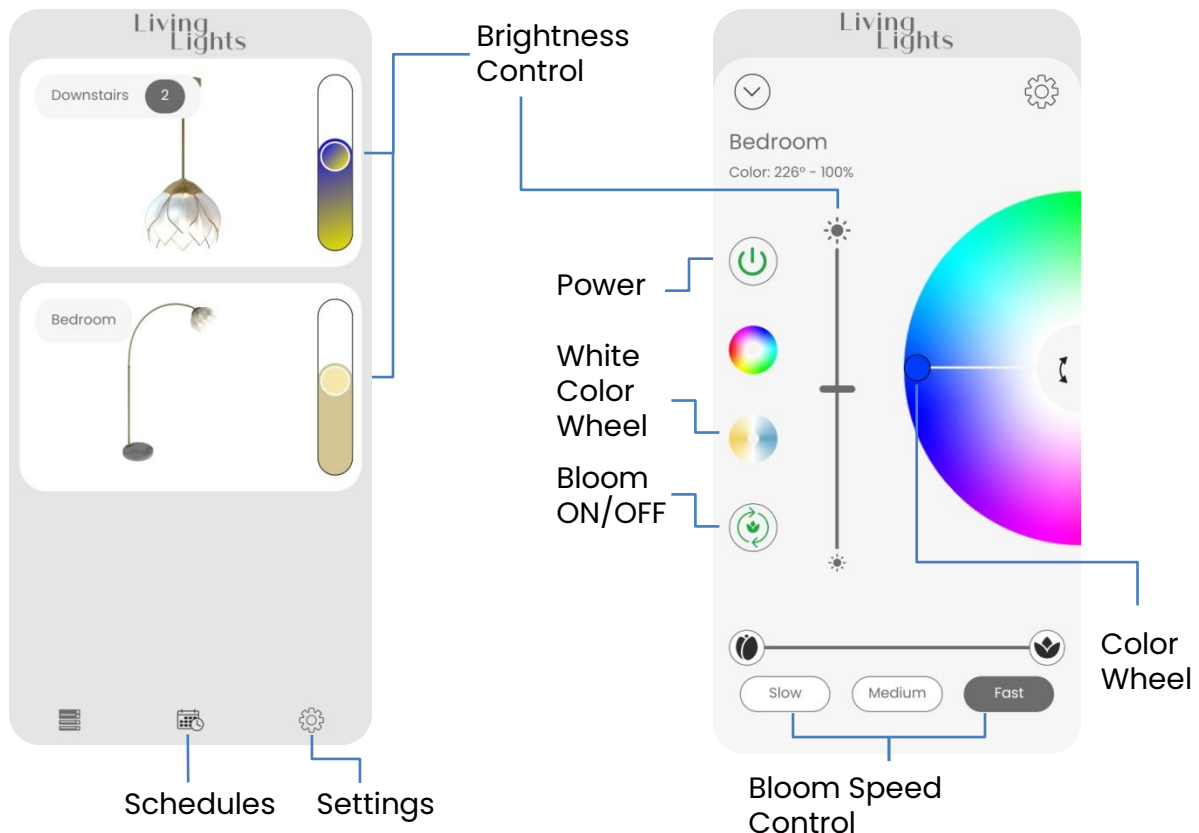


GROUPING LIVING LIGHTS

If you have 2 or more Living Lights on your account, you can group your lights for easier control.

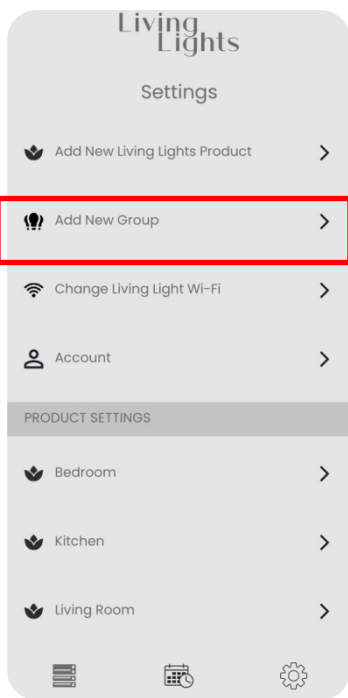


Give Group Name

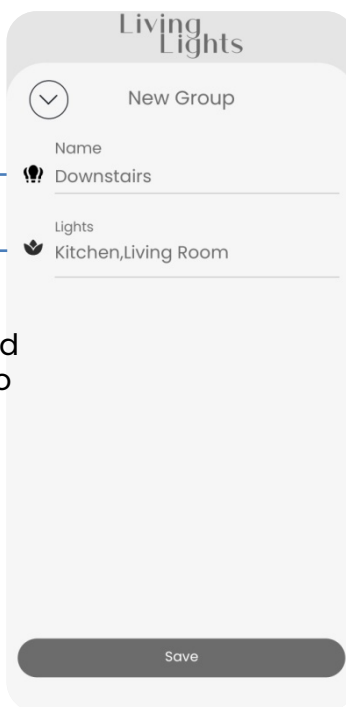

Selected Lights to Group



of group members

Group ON/OFF Controls

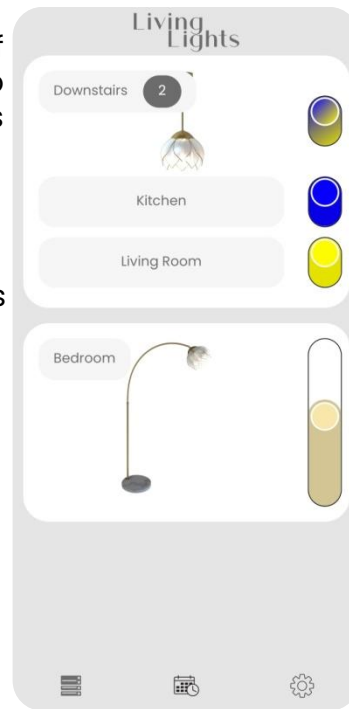

SCHEDULING


Set schedules to control lights automatically at a desired time. Schedules can be set for lights or groups. Once created, you can enable, disable, edit, or delete a schedule at any time.

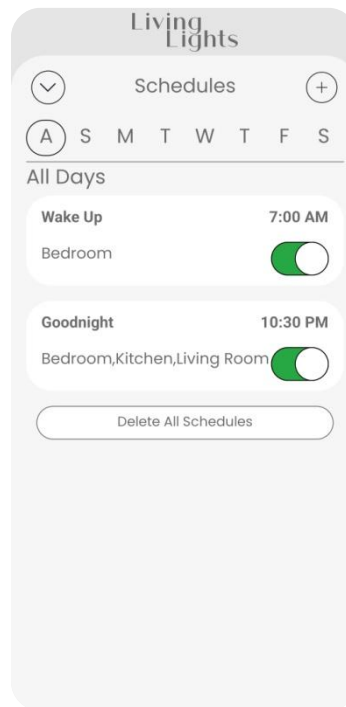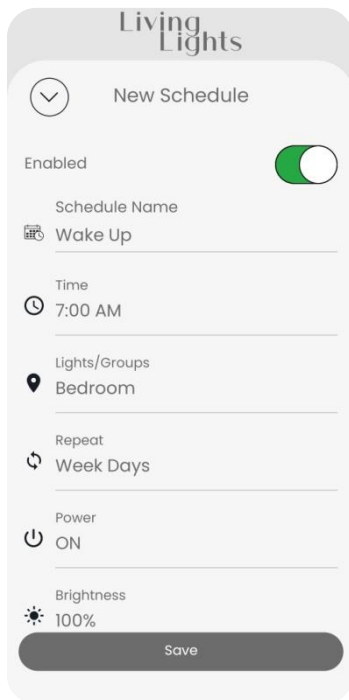

Enable/Disable Schedule

CARE AND MAINTENANCE

- Use a dry soft cloth to dust the surface.
- Do not clean with abrasive materials, bleach or solvents.



Troubleshooting