

STAR-MOUNT SYSTEMS

Please Follow these Steps in the Pictures shown

If you have any question, please contact us at

STARMOUNTS@YAHOO.COM

You can also Call or Text Brandon @ (760)402-5417

THINGS NOT INCLUDED THAT YOU WILL NEED TO PROCEED:

1. GORILLA GLUE: CLEAR GRIP (Picture on Page 54)
2. DREMEL TOOL (Suggested 4300 Series) Includes all Bits needed in this kit. (\$129 at Home Depot)
3. DREMEL 1/8" (3.2mm) Multi Purpose Cutting Bit (Dremel #561) and Sanding Disk (Picture on Page 2 and 3)
4. Razor Blade
5. Flush Cuts or Cutting Pliers
6. Flat Head Screwdriver
7. Hammer
8. TIME and PATEINCES! Take your time! A mistake could lead to a damaged Dishy!


GOOD LUCK! PLEASE FEEL FREE TO CONTACT DURING THE PROCESS IF YOU NEED ASSISTANCE!









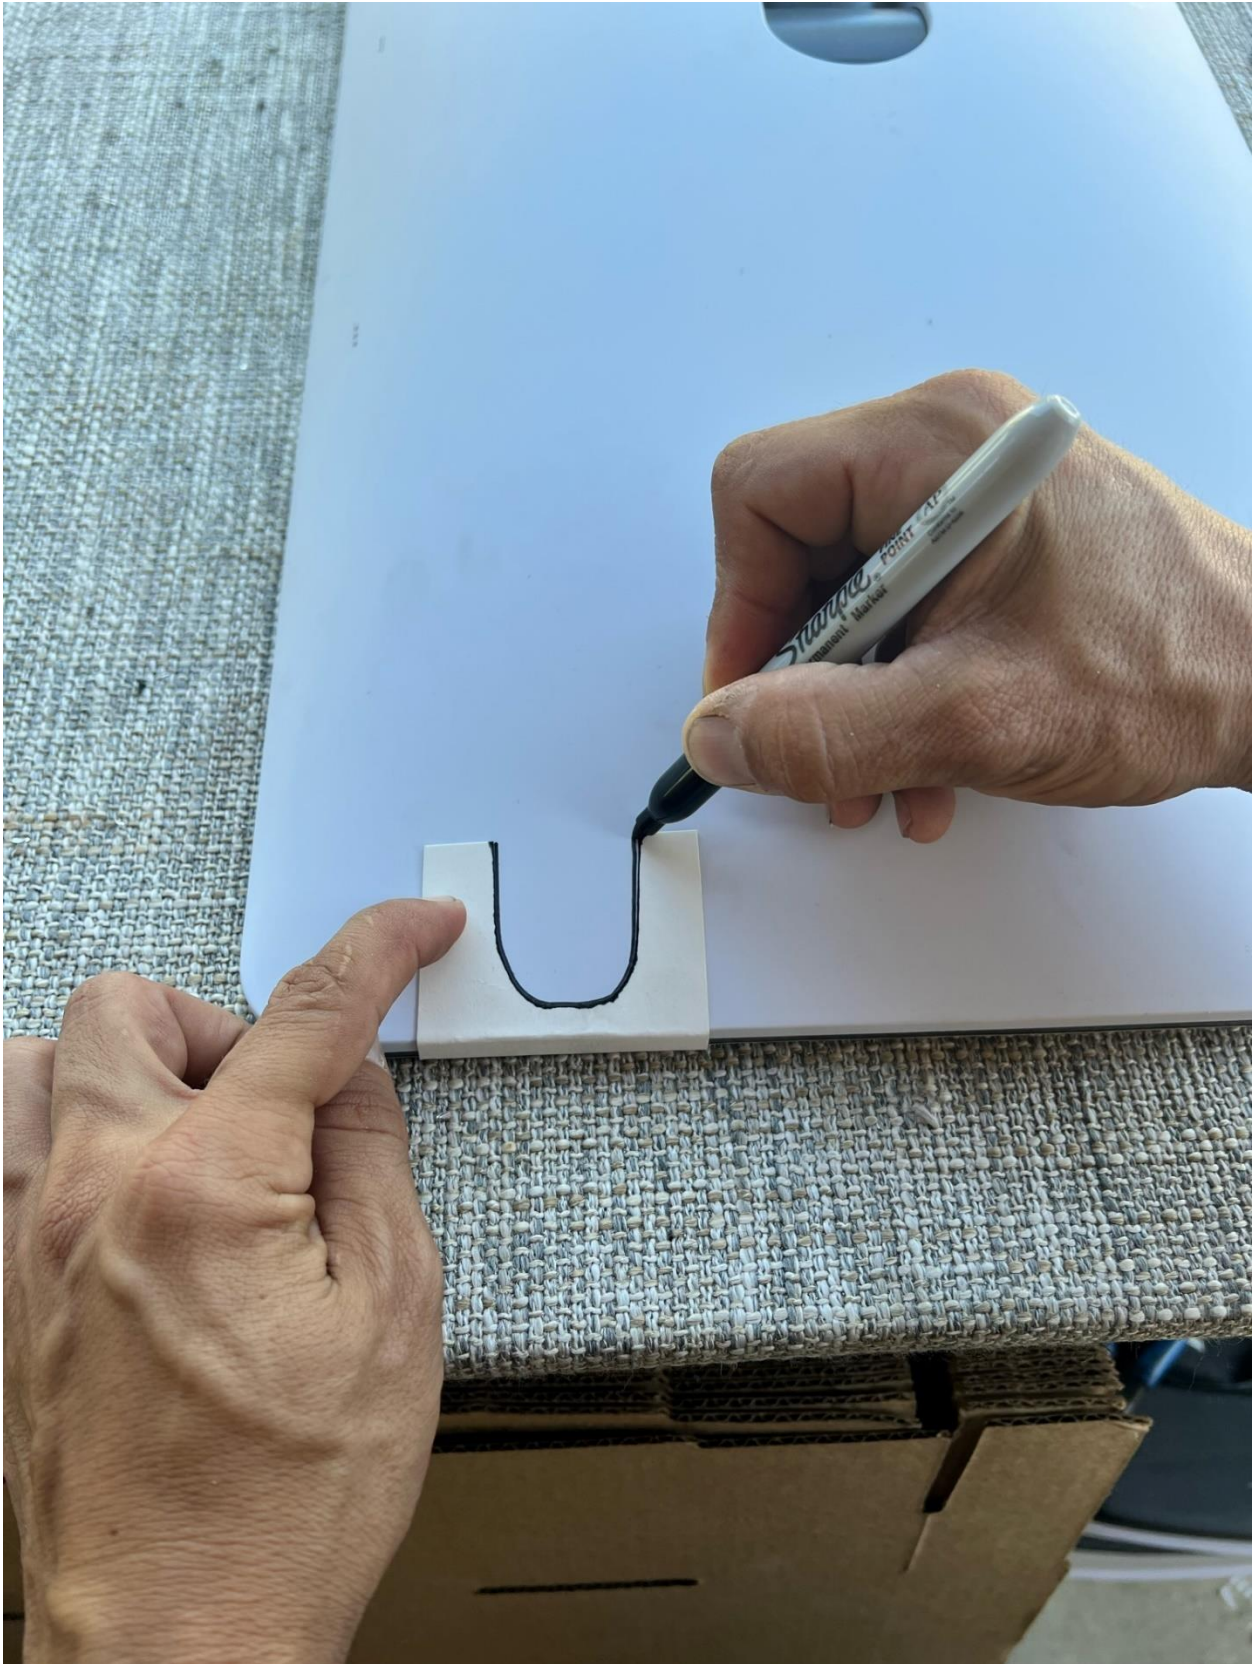






Finish edges by hand. This does not need to be perfect







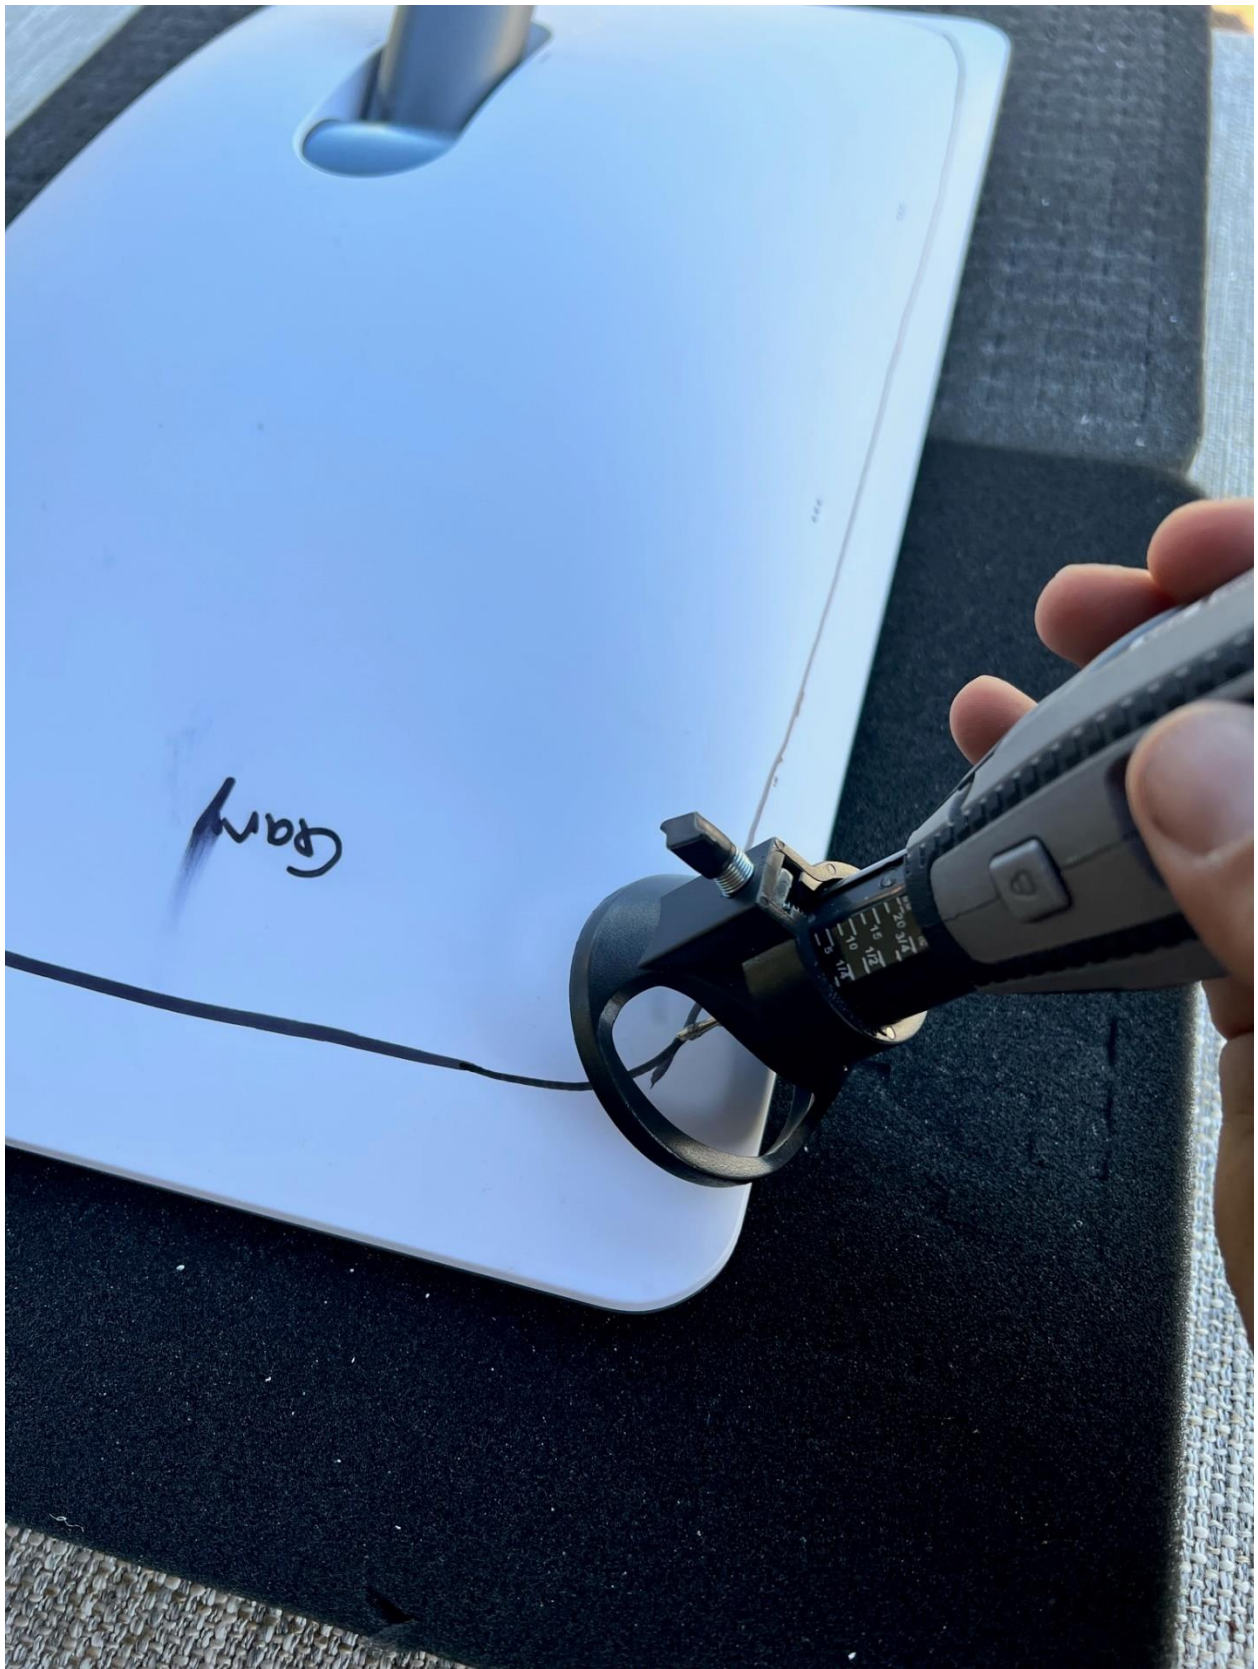




























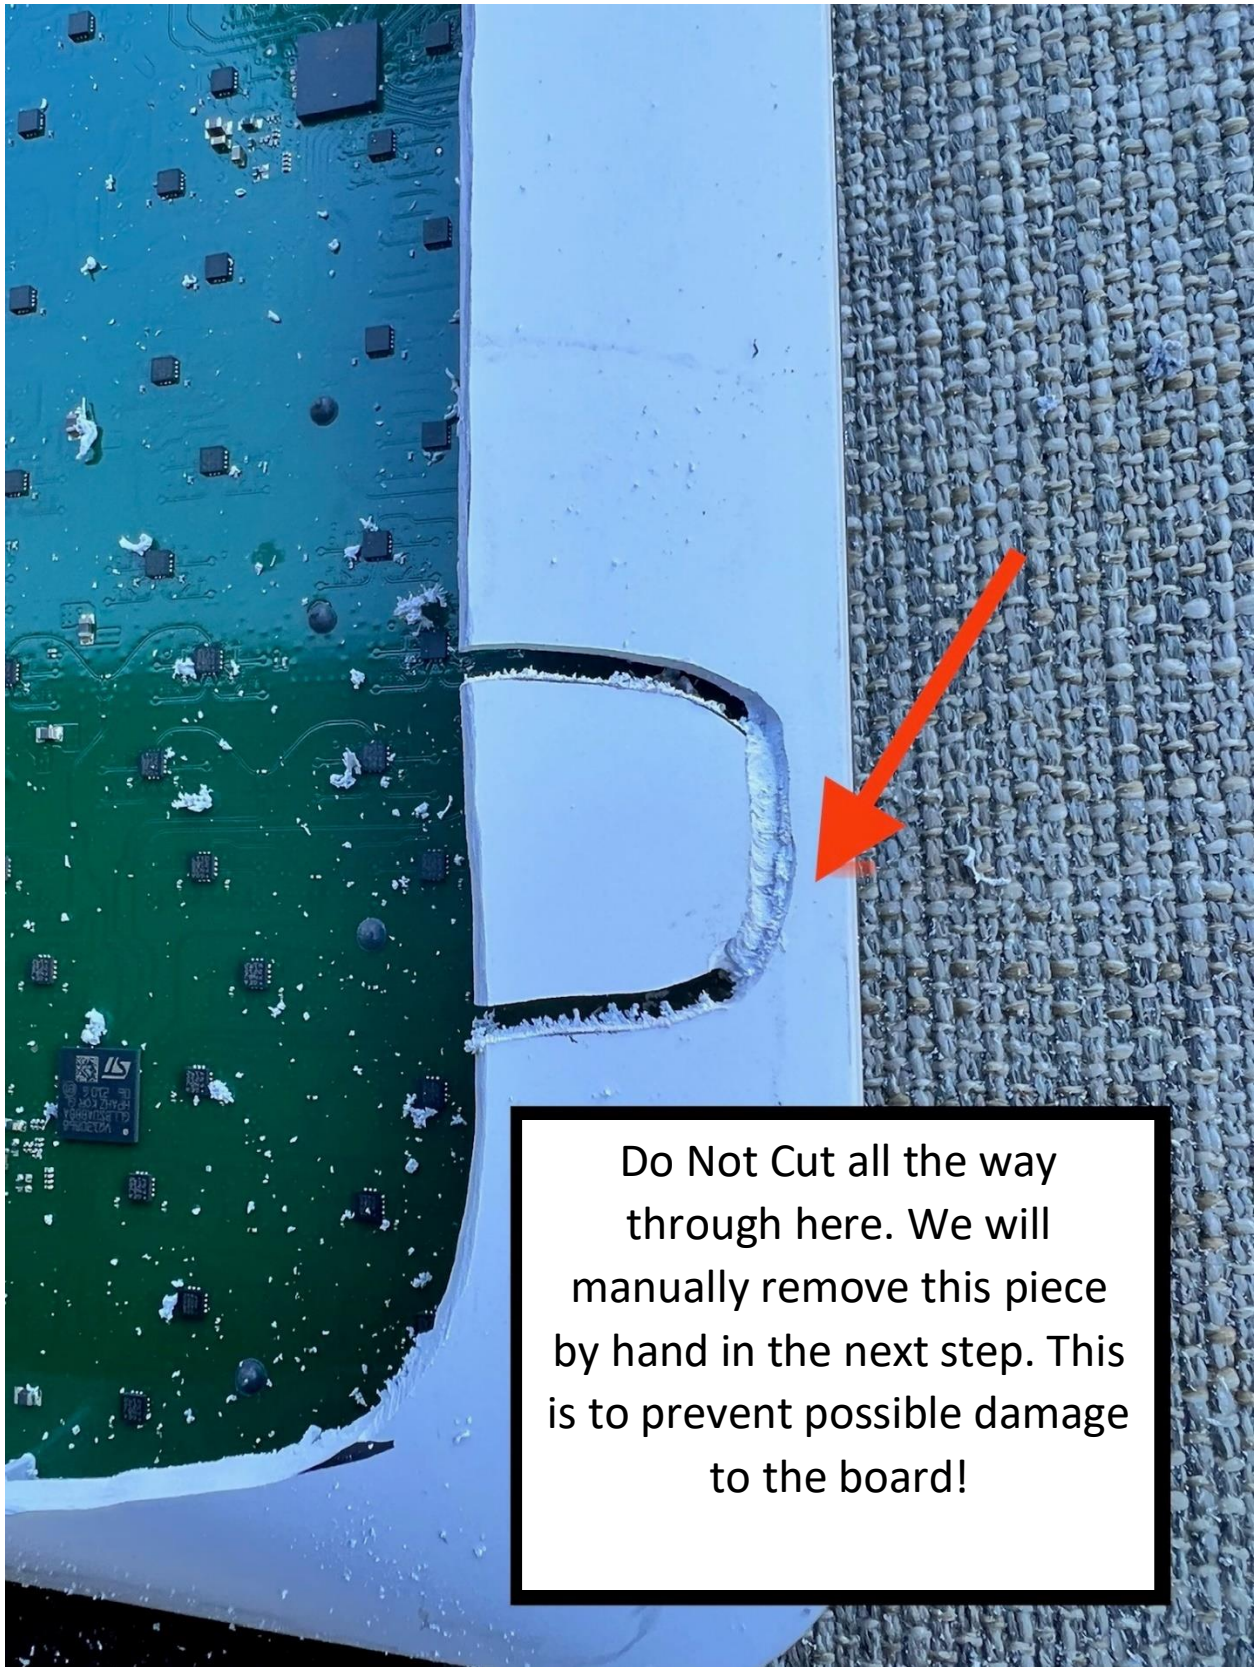

Do Not Cut all the way through here. We will manually remove this piece by hand in the next step. This is to prevent possible damage to the board!














Push release button with your finger and pry the smaller square with a flathead screw driver. You will be removing this piece from the pole.



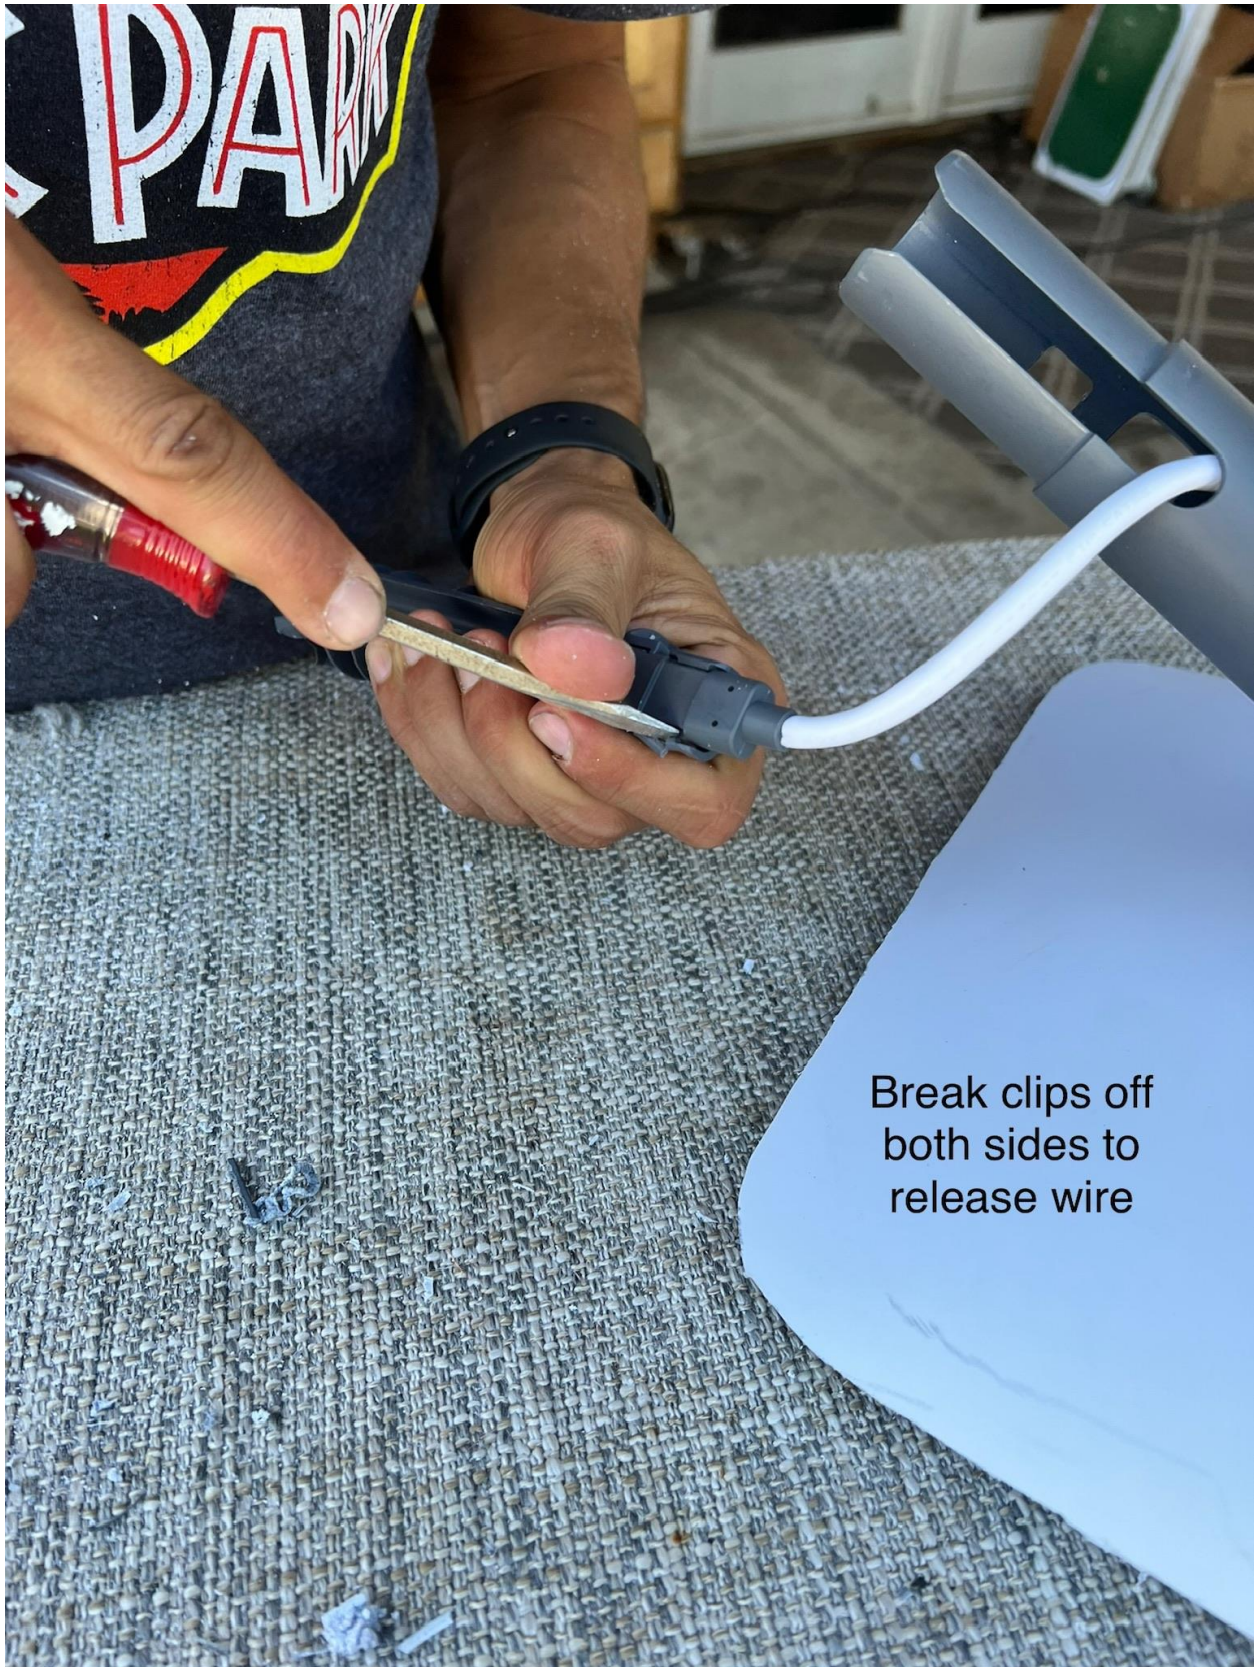

Break clips off
both sides to
release wire



Pull wire through
the back housing






If your wire has this style on it, simply unclip it and ignore the next step. If your wire has the rubber style, follow the next step!





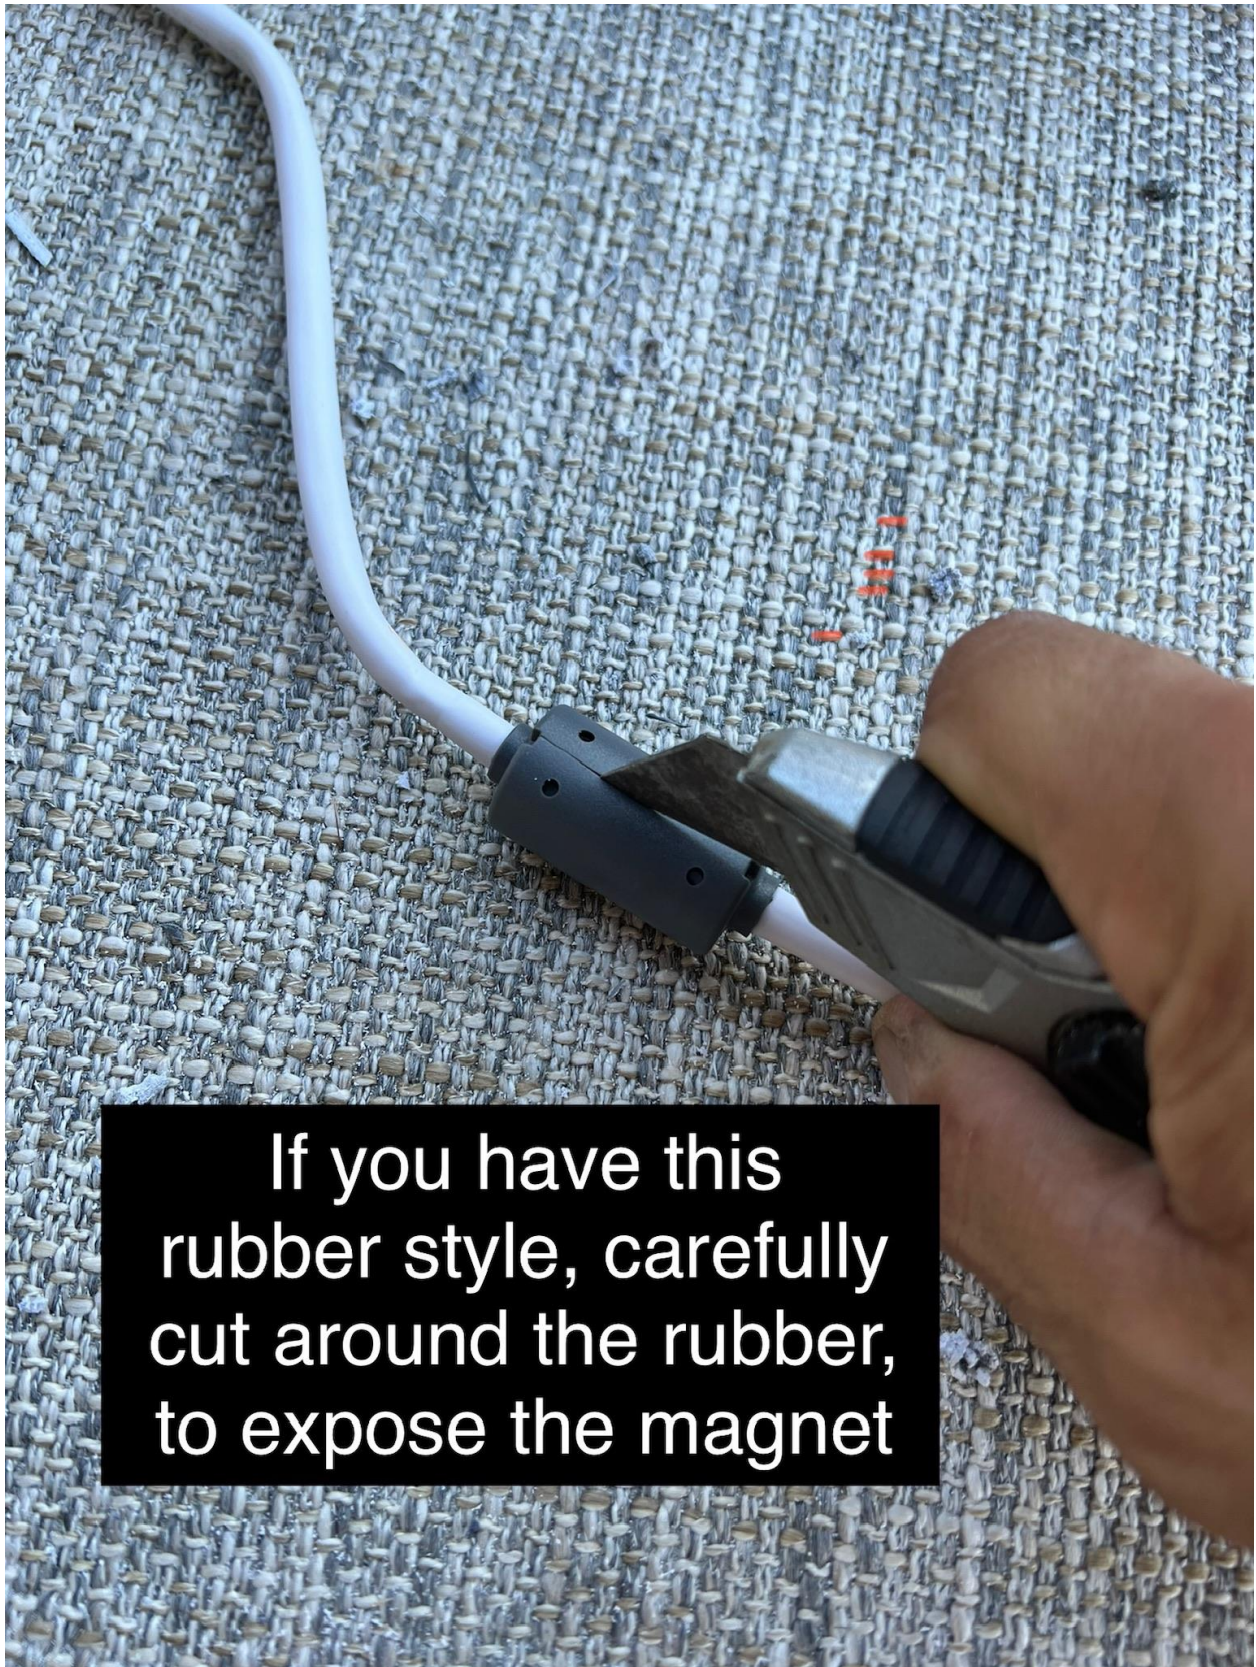

If you have this rubber style, carefully cut around the rubber, to expose the magnet













Only requires a gentle tap and the
Magnet cylinder will fall apart

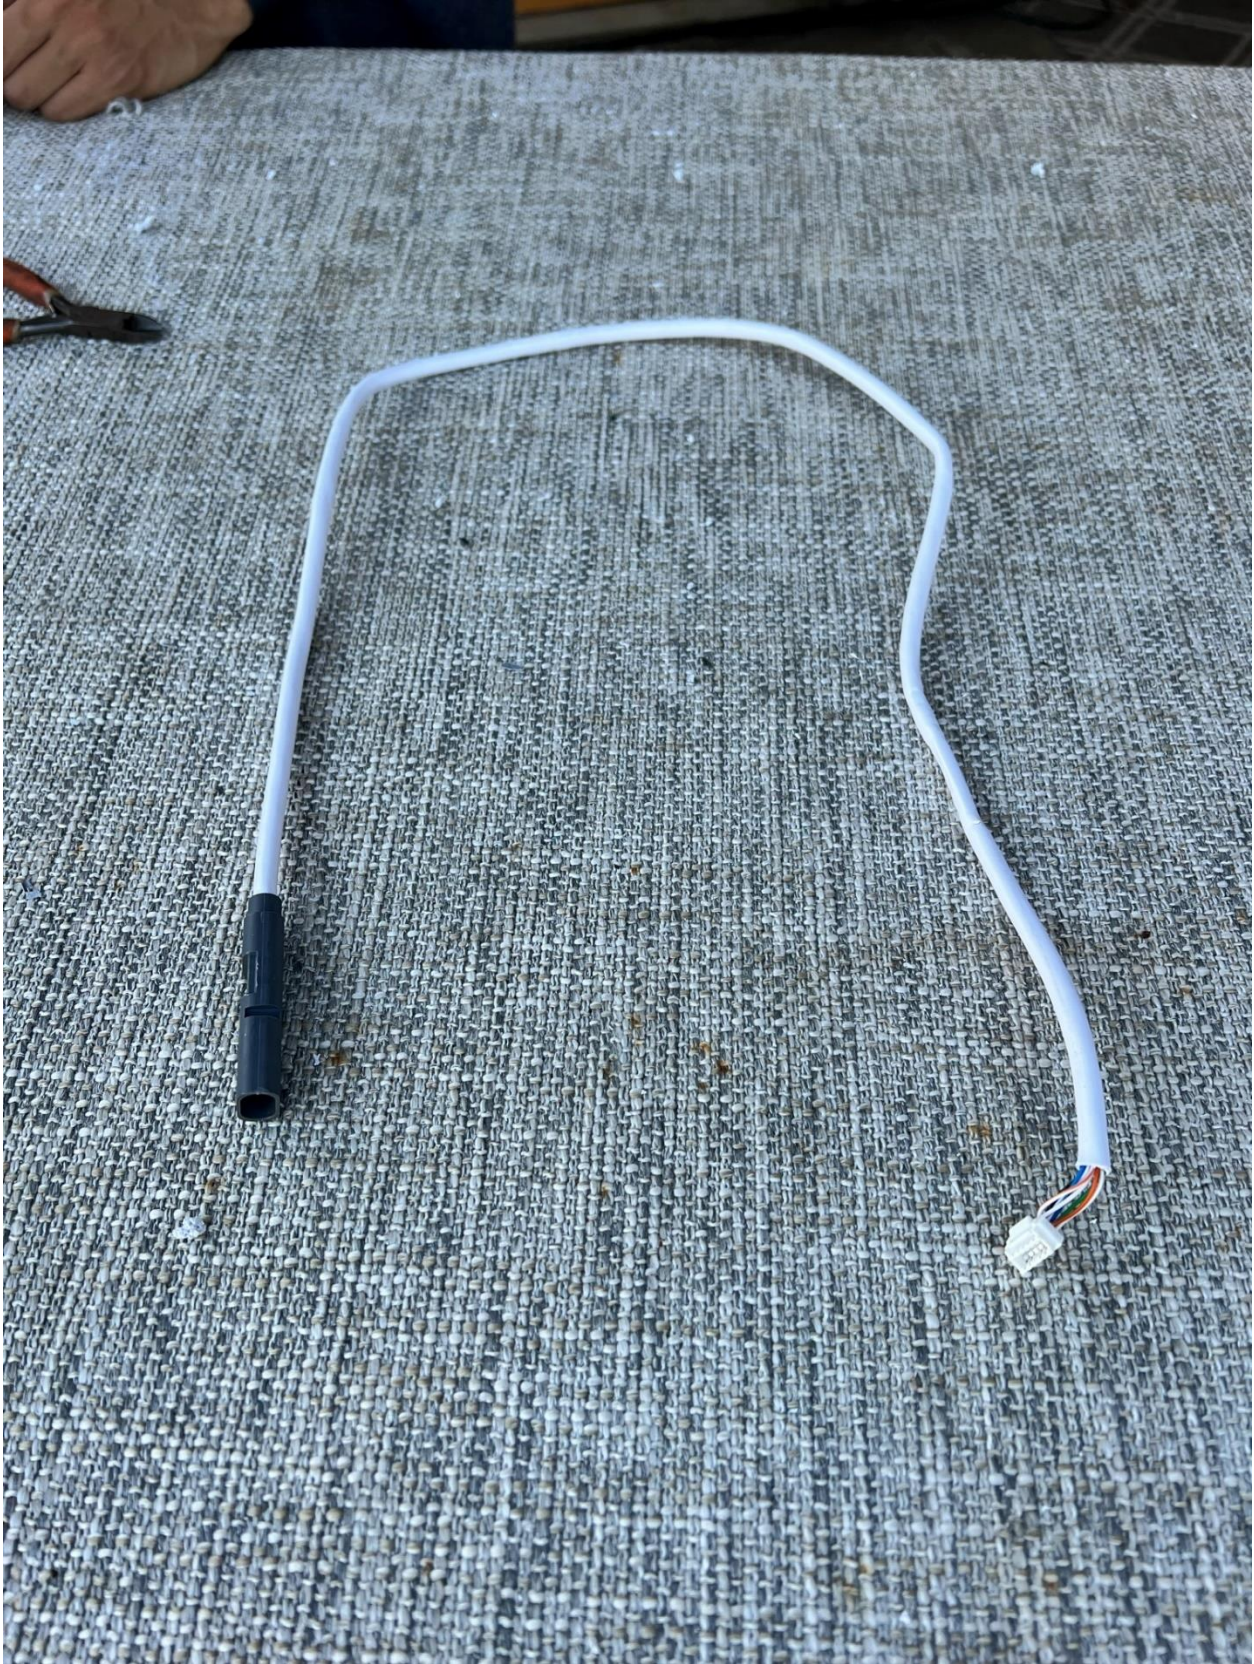

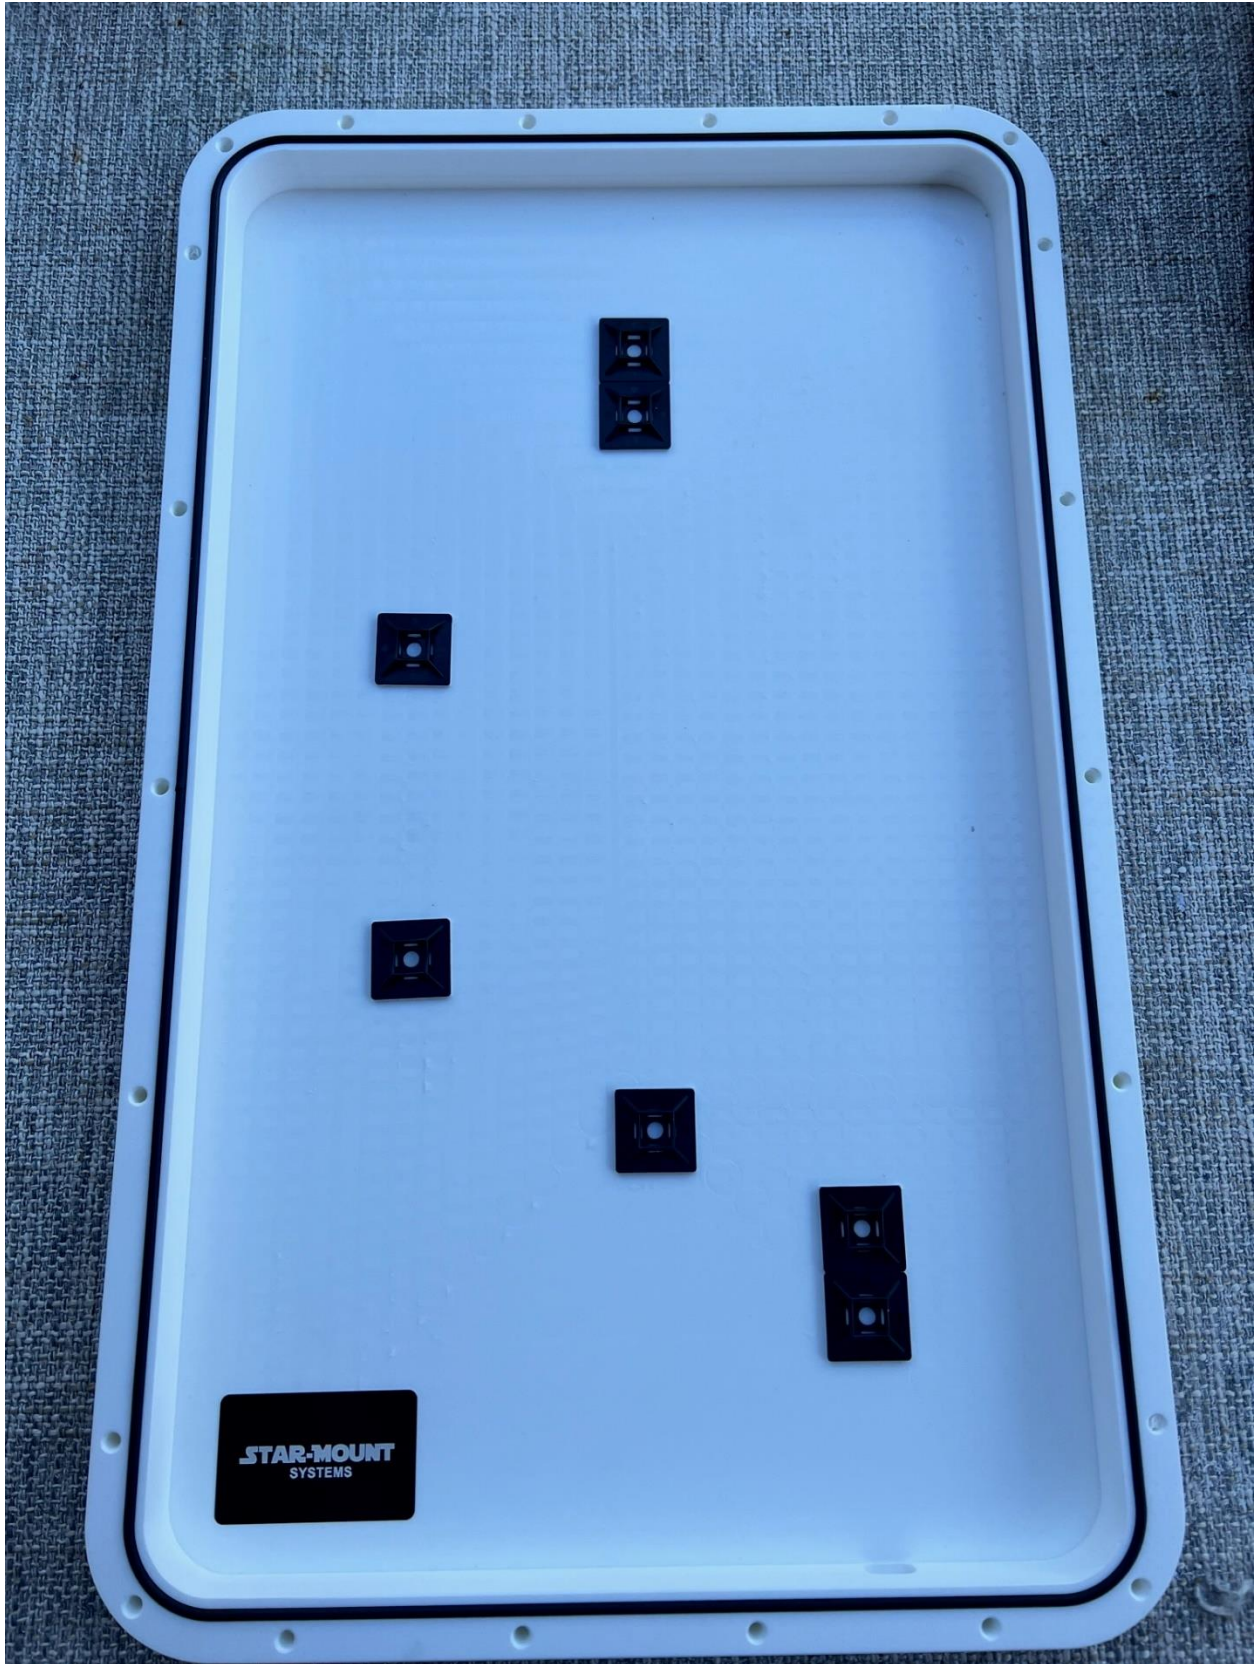

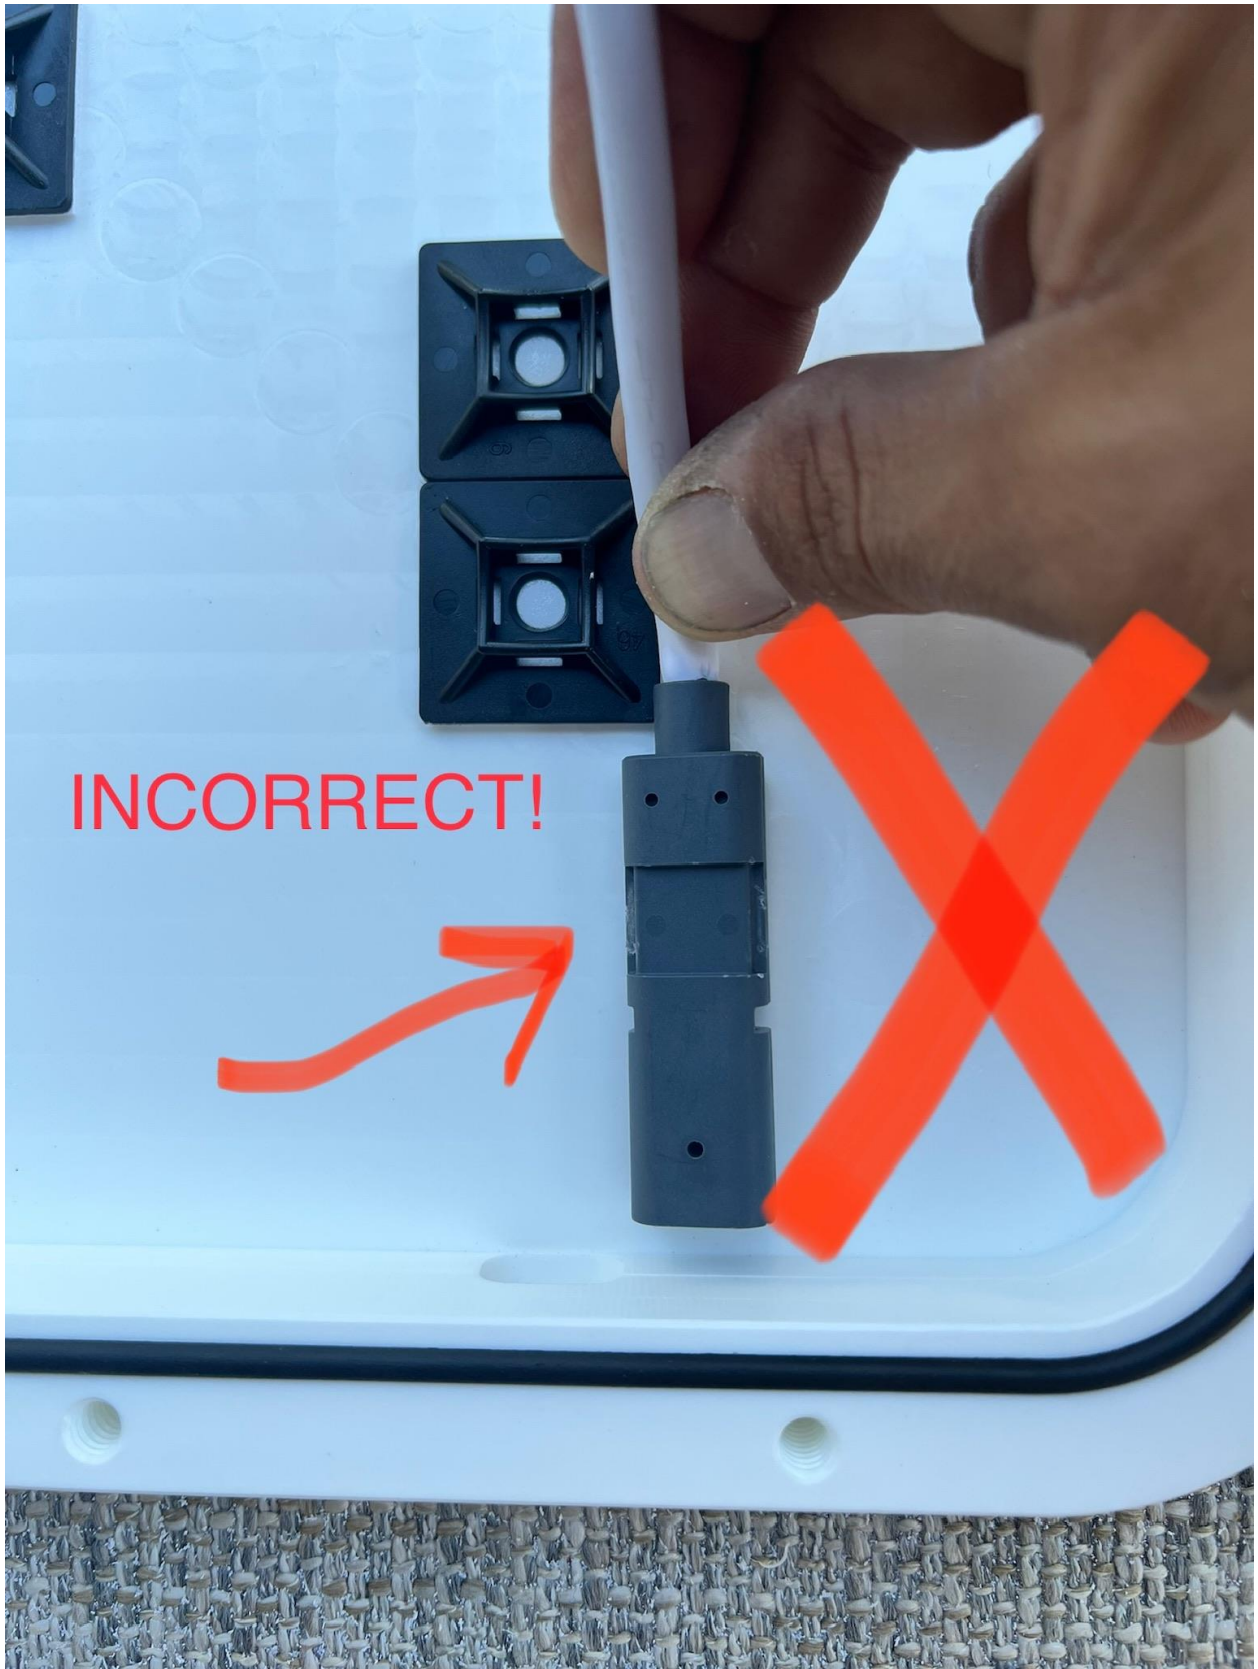


CORRECT WAY!
Square groove
facing down!

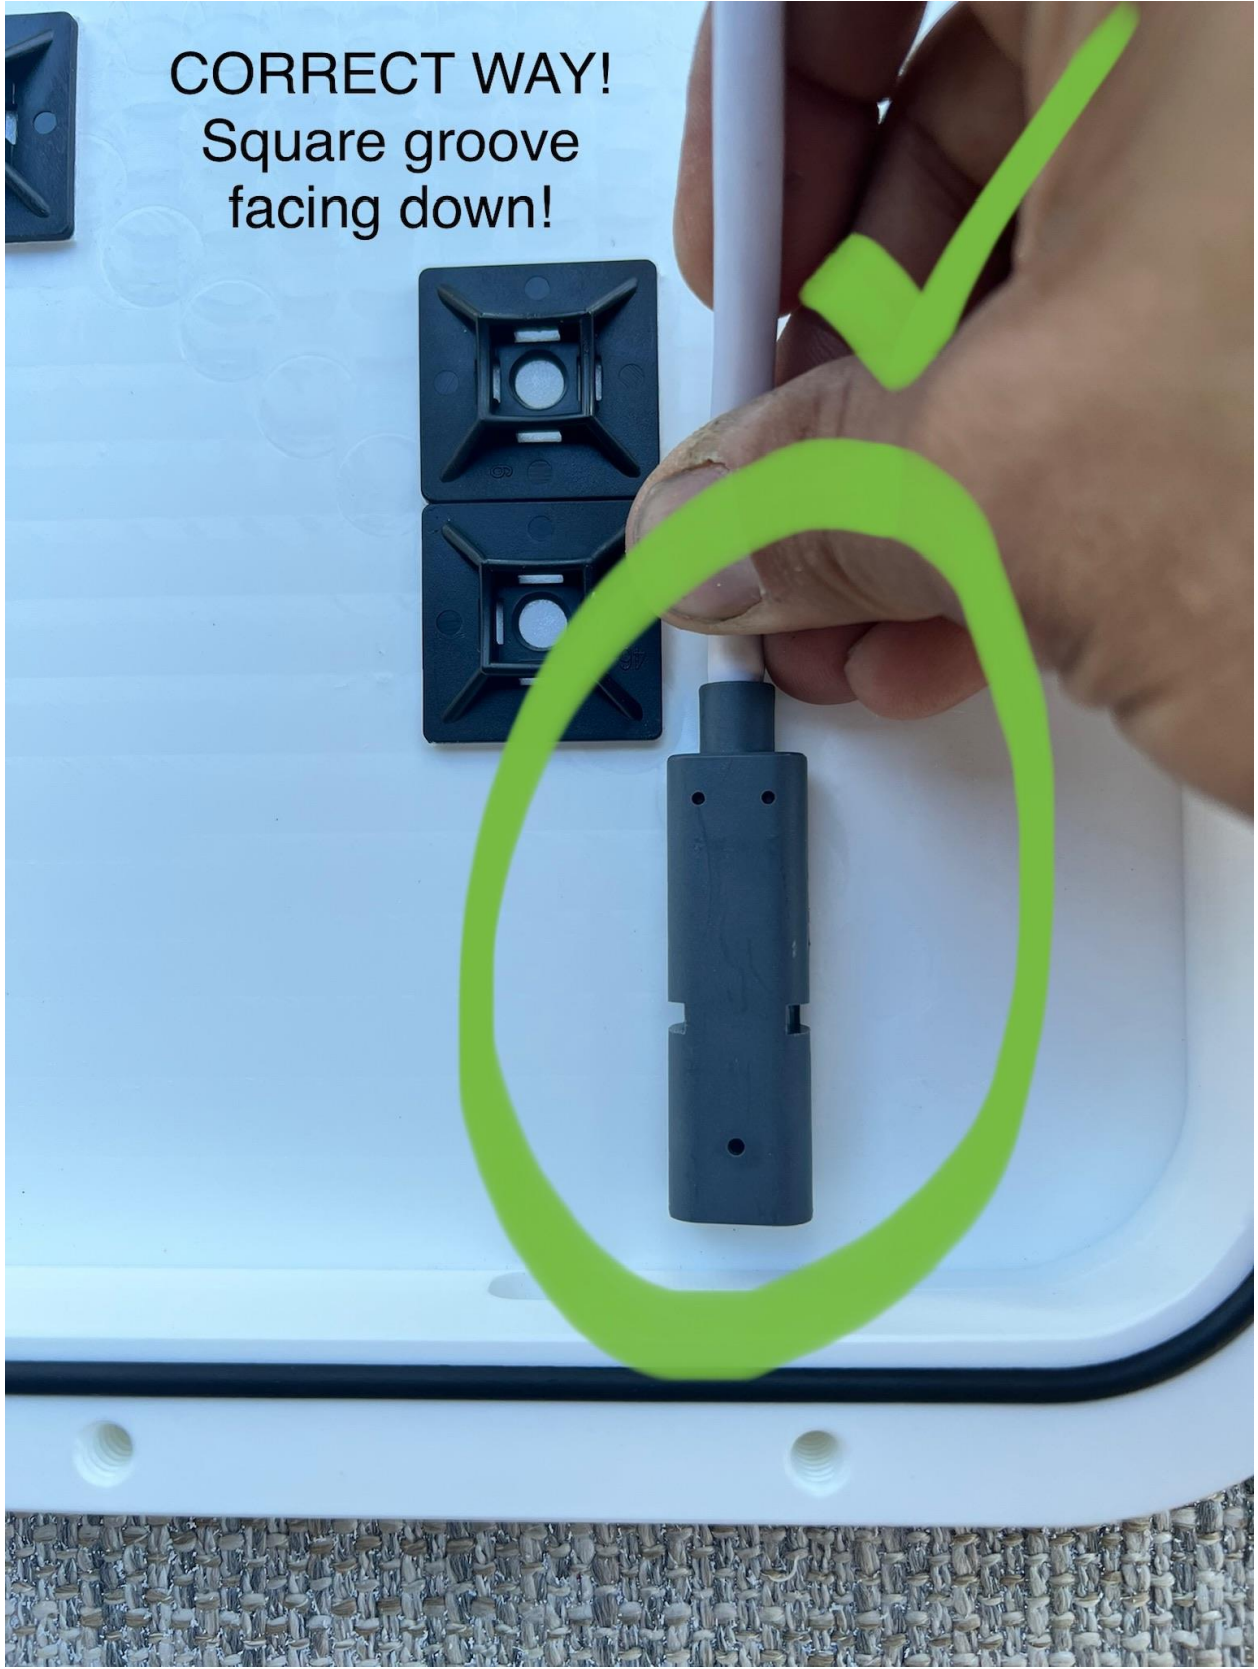




Set your plug to stick out of the mount a little bit as shown. DO NOT make it flush with the mount. This could cause the plug to not set correctly when you plug your power cable into it!

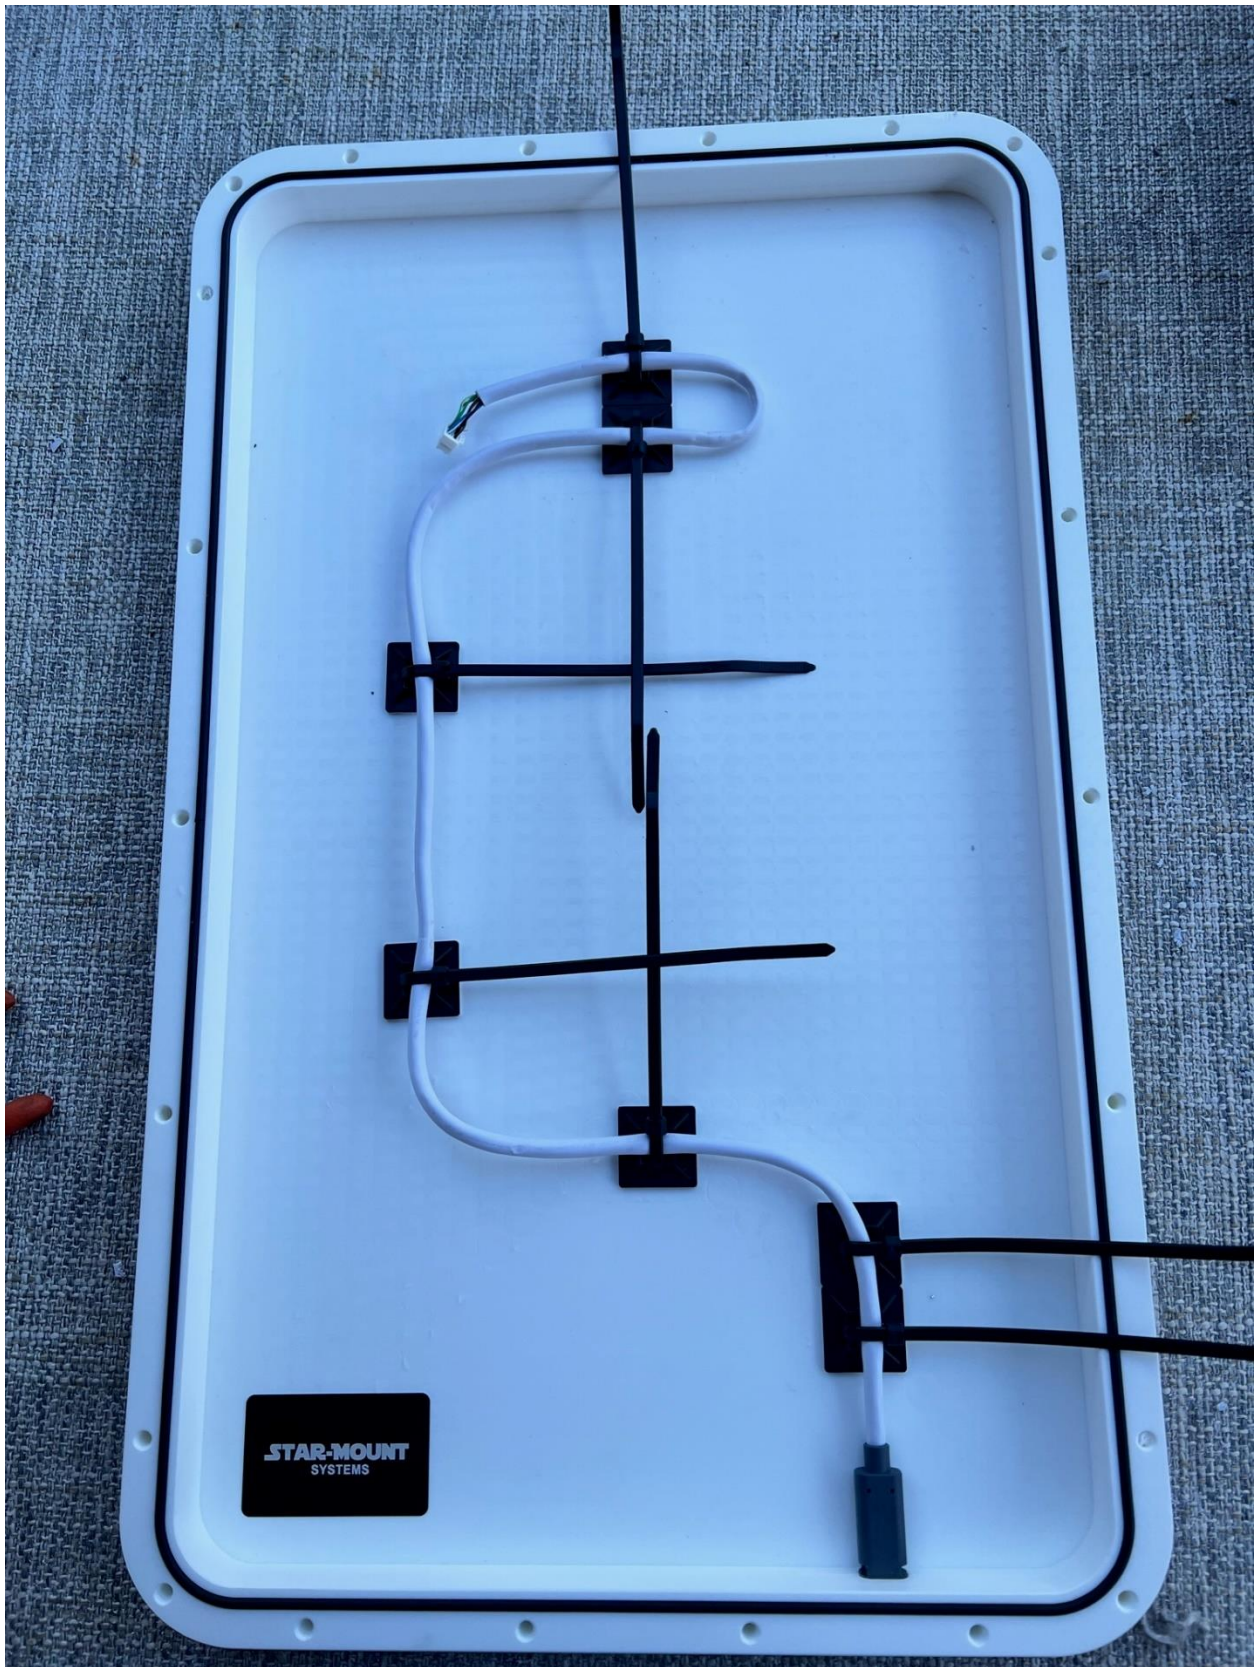



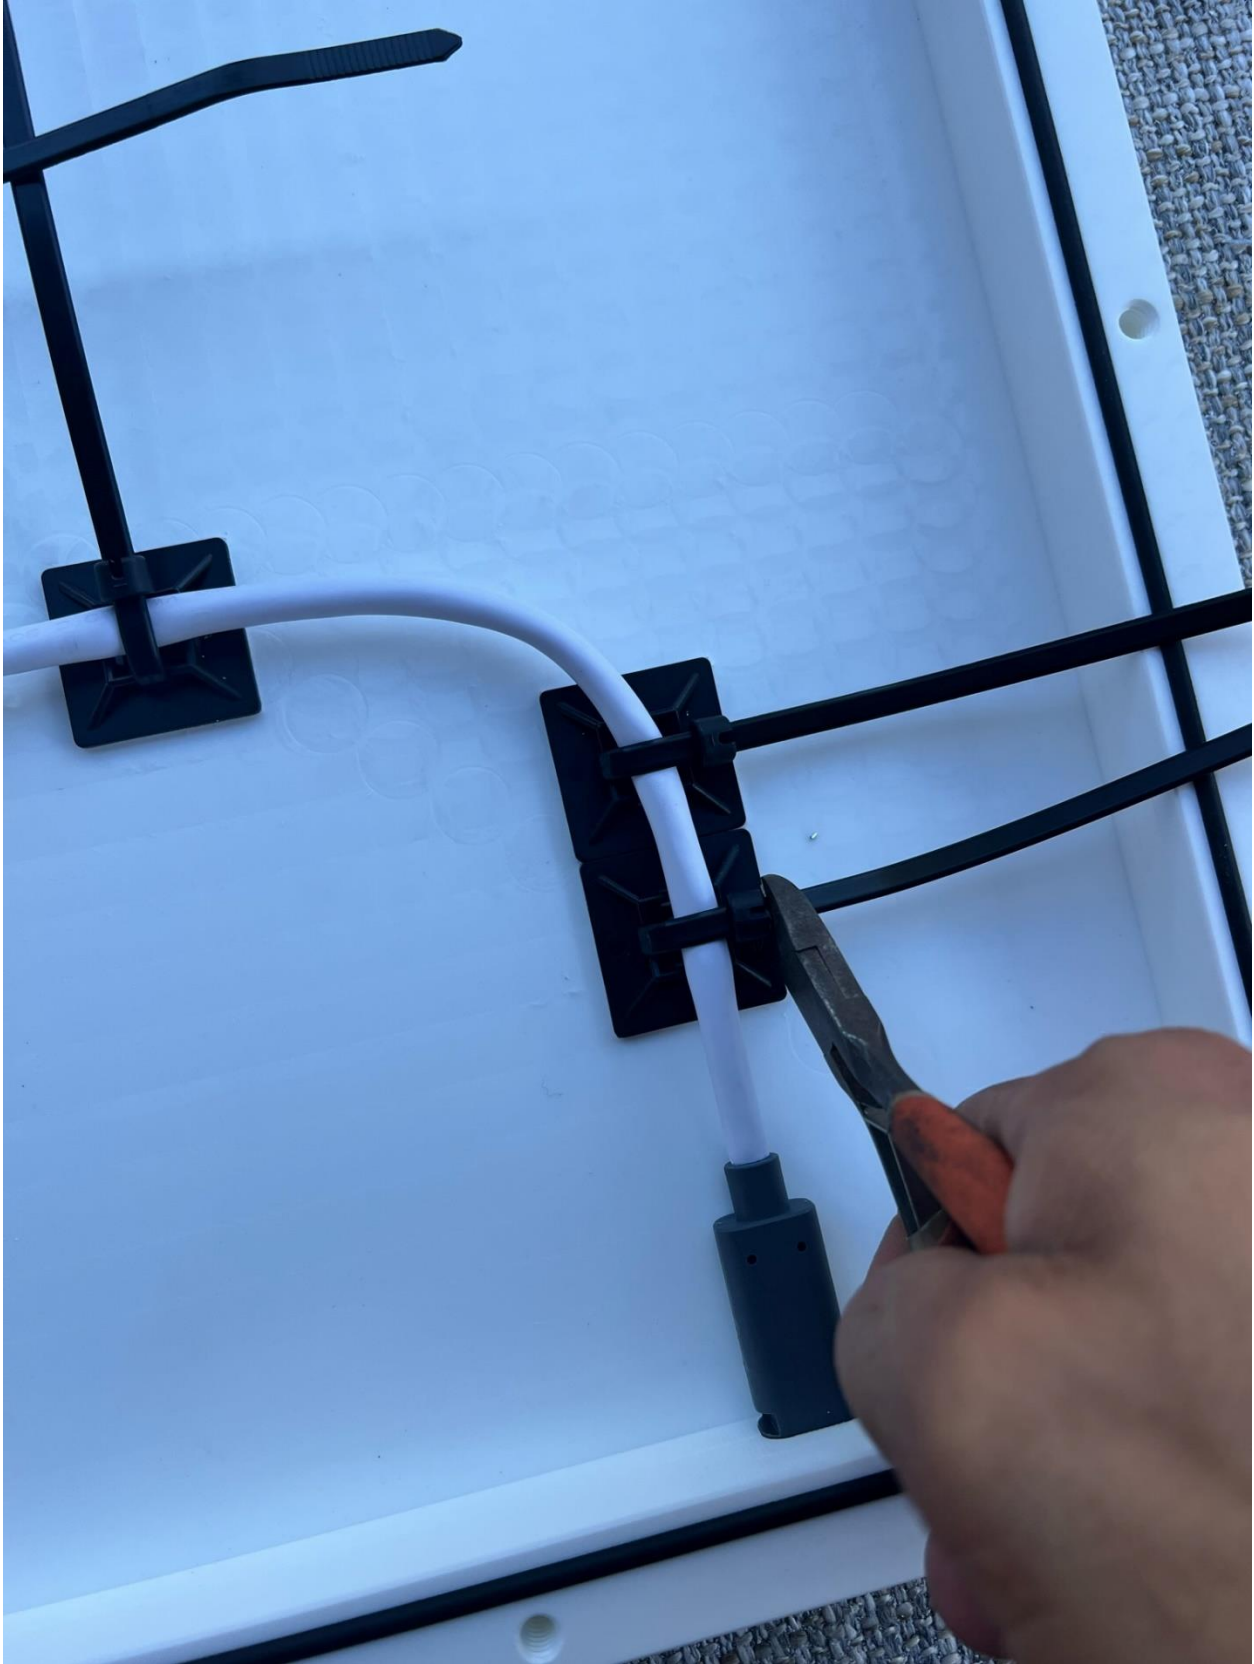



USE
LIKE
E6000

INCREDIBLY STRONG

DANGER: VAPOR HARMFUL. FLAMMABLE. IRRITANT.
STORE AWAY FROM CHILDREN AND ANIMALS.
READ CAUTIONS ON BACK OF TUBE.

CONTACT ADHESIVE
CLEAR GRIP

INCREDIBLY STRONG

GORILLA
CONTACT ADHESIVE
CLEAR GRIP

Bonds
Metal, Glass, Fabric, Wood,
Ceramic, Leather, Paper,
Plastic* and More!

100% Waterproof
Permanent Bond
Holds in Just Seconds

CRYSTAL CLEAR

3 fl. oz. (88 mL)



Crystal Clear



100%
WATER PROOF
for
Indoor & Outdoor



Holds in Seconds

- Flexible
- Paintable


DANGER: VAPOR HARMFUL.
FLAMMABLE. IRRITANT.
STORE AWAY FROM CHILDREN
AND ANIMALS. READ CAUTIONS
ON BACK PANEL.

3.0 fl. oz. (88 mL)

MUST SEAL THIS WITH GORILLA
GLUE CLEAR GRIP



Apple AirTag
Sold Separate

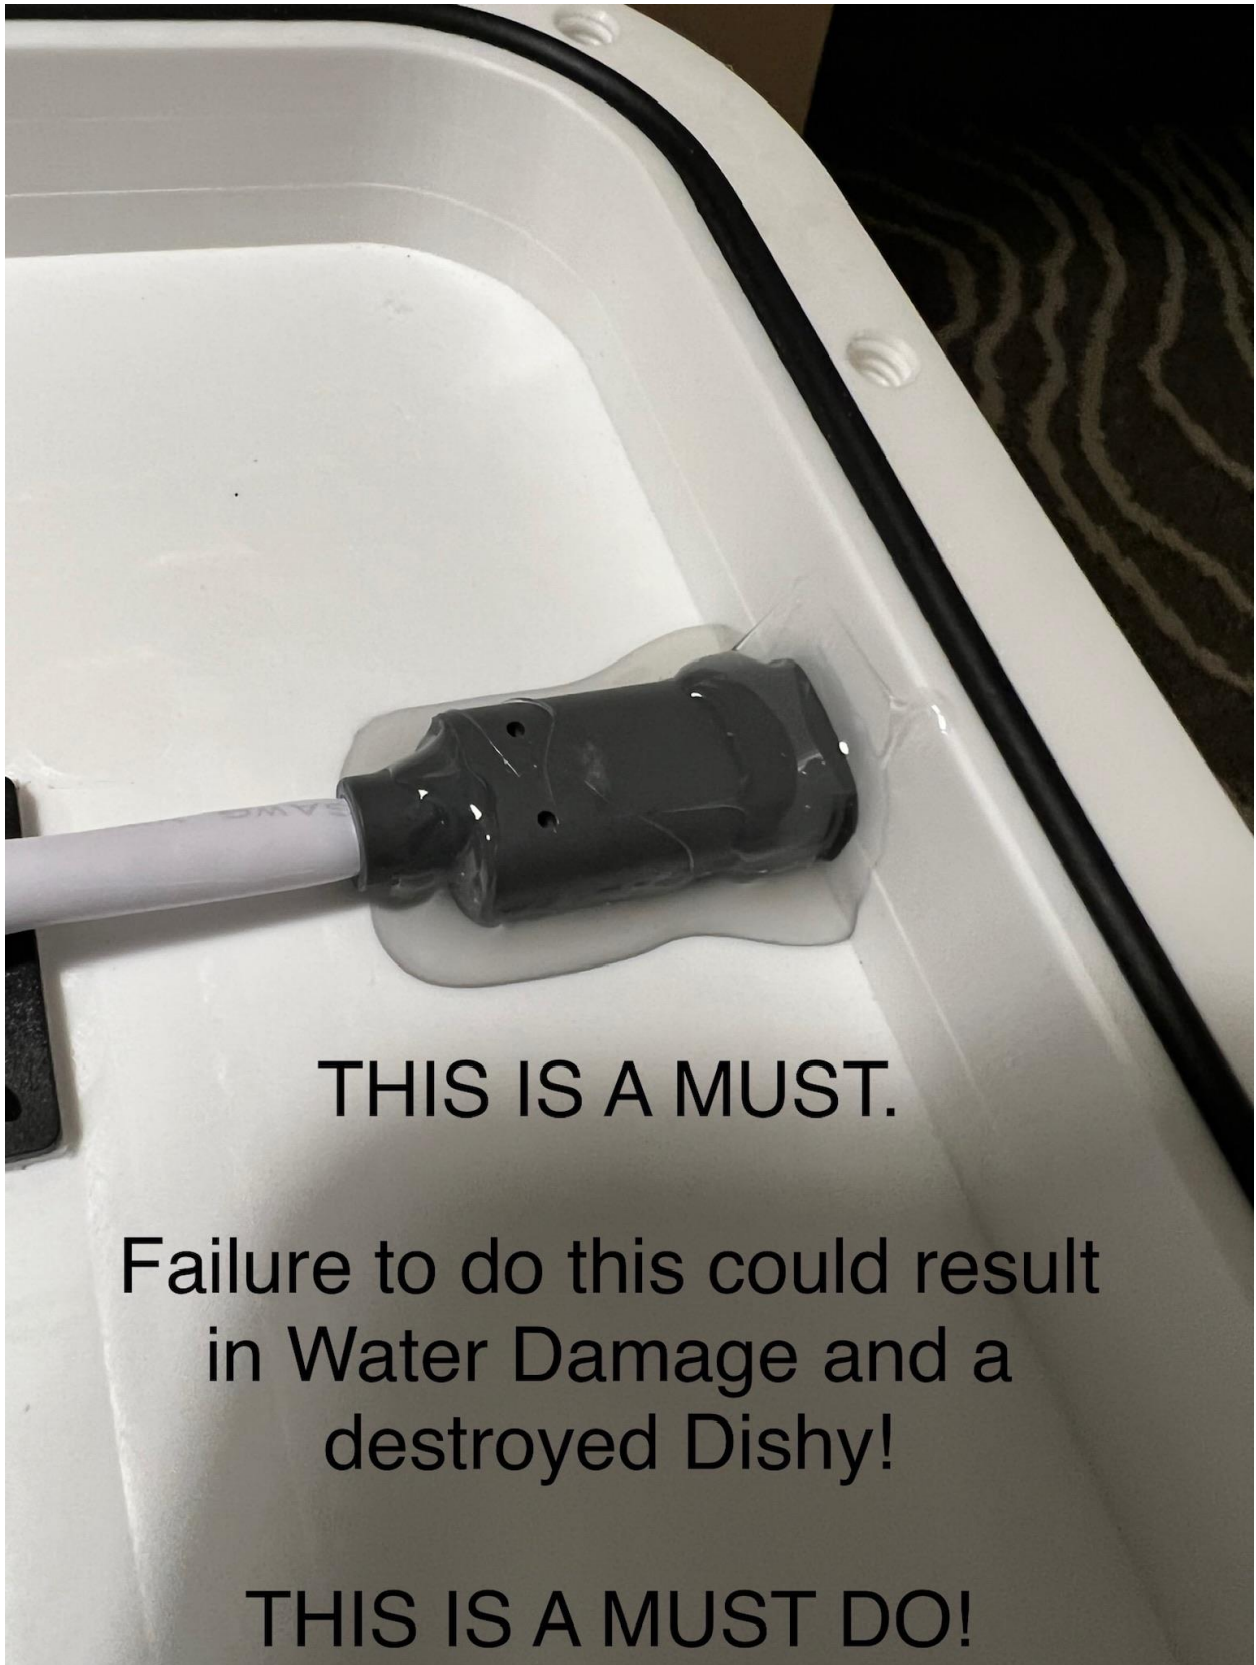

THIS IS A MUST.

**Failure to do this could result
in Water Damage and a
destroyed Dishy!**

THIS IS A MUST DO!











Make sure all your screws are tight all the way around, and you are **DONE!**

If you purchased Magnets or Suction cups you will receive 4 longer bolts. These will go in the corners and allow for attachment of your add-on!



You will use the Heat Shrink Included and put it over your Starlink Cable as shown. All you need is a Heat Gun, Lighter, Blow Dryer or anything that will put off heat!

This is meant to go over your Starlink Cable to help prevent water damage to your Starlink Cable. It also does not hurt and is suggested to put a little bit of Silicone over the plug after its plugged into your Mount.

**STAR-MOUNT
SYSTEMS**

If you have any question, please contact us at

STARMOUNTS@YAHOO.COM

You can also Call or Text Brandon @ (760)402-5417

Please share your install and setup photos with us! We also invite you to share your Photos on Facebook and Instagram and Tag Us in your post! We would love to share and showcase your setups!

Thank you again!