

GHOST WATCH TEMPUS^{1.0}

Model: WTC 1.0
User Manual



TACTICAL

Display and Button Functions




- Key S1:** Start/Stop/Turn On&Off/Up
- Key S2:** Reset/Down
- Key S3:** Mode/Confirm/Save
- Key S4:** Light/Set

Function Instruction

- 12-digit display: Hours/Minutes/Seconds/Steps count/ Percentage of target steps; Month/date/year.
- 12/24 hour format.
- Steps counting:
 - a, Personal parameter input settings.
 - b, Turn on or off pedometer manually. In pedometer mode, there are sleep and data clearing functions;
 - c, Real-time query of the accumulated step data of the day: number of steps, calories, exercise mileage, exercise time.
 - d, Historical pedometer data storage and query function, which can store 31-day pedometer data and query historical data every day: steps, calories, exercise mileage, exercise time.
- Alarm: can set the alarm, hourly chime, snooze function.
- Stopwatch: Maximum stopwatch timing 23H:59M 59S.
- The second time.
- Countdown: the maximum countdown time is 24 hours.
- Low voltage detection.
- LED back-light, press S4 to turn on 3 seconds back light.

Backlight & Full display & Low battery detection

1. In any mode, press the S4 key to light up and delay for 3s.
2. In any mode, press S1-S2-S3 keys in turn will full display; Press any key again to exit the full display and return to the current display.
3. When the battery voltage is less than 2.4V, the low battery detection prompt icon will be displayed.

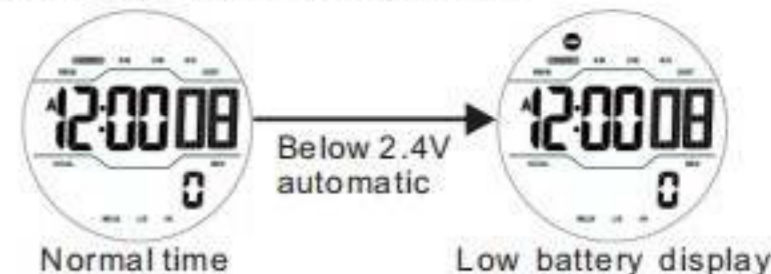

Month, Day, Week display

