

#### LED ILLUMINATED MIRROR

## **Installation Instructions**

### Beacon / LI2537

#### **ELECTRICAL SAFETY INSTRUCTIONS**

All connections must be installed by a licensed electrician, in accordance with current building codes. Consult a qualified electrician.


#### **IMPORTANT**

Always switch off the electrical supply at the main during installation and maintenance. It is recommended that the circuit breaker is switched off for the necessary circuit before installation commences.

Fitting in Bathrooms is subject to the appropriate building code Regulations. This product is **NOT** suitable for outside zones. It is also **NOT** suitable for installation in saunas, steam rooms or shower cubicles. This product is only suitable for permanent installation. **DO NOT** connect to a trailing plug and socket outlet. This product is only suitable for indoor use. **DO NOT** attach the product to surfaces that are damp or otherwise electrically conductive.

#### **INSTALLATION CARE & SAFETY**

Wear suitable eye protection when drilling. Take care when using power tools. Beware of hidden cables or pipes. Take care if drilling on tiled surfaces in case the drill slips. A piece of masking tape applied to the wall before marking out the fixing holes will stop the drill from wandering.

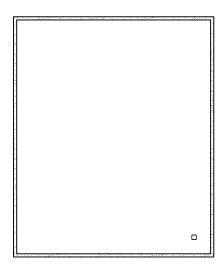

#### **IMPORTANT**

**DO NOT** strike glass components with hard or pointed items. **DO NOT** place very hot or very cold items against or in close proximity to glass surfaces unless an adequately thick insulation materal is used to prevent such items coming in contact with the glass. The nominal thickness of the mirror glass used in this product is 1/4" and is flm backed for safety. If the glass becomes chipped or broken replace immediately.

#### **CLEANING**

It is recommended that the unit is cleaned with a soft, dry, non abrasive cloth when turned off. Never use cleaning agents or abrasive materials on any type of surface fnish. **DO NOT** allow moisture to come into contact with the electrical components.



LTL HOME PRODUCTS, INC.




LED Designer Mirrors by LTL Home Products

LED ILLUMINATED MIRROR

# **Installation Instructions**

Beacon / LI2537

- 1. Remove the packaging careully, do not lose the screws
- **2.** Using a level, mark off a horizontal line, and ensure that the ends of the brackets are spaced to the width between the inner edges of the vertical aluminium extrusions (see illustration 1). Mark off the holes using a pencil.
- **3.** Note: Screws supplied are only suitable for stud walls. For drywall walls use special wall fasteners, available from DIY or hardware stores. Seek advice from a specialist about the suitability of screws to be used. Drill the required holes and insert wall screws.
- **4.** Screw the bracket to the wall using the screws provided. Please ensure the screws are fully tight but take care not to overtighten.



5. Before making any electrical connections it is necessary to turn off the main electricity supply. This unit is provided with a supply cable already fitted. This cable should be fitted to the household lighting

be made in accordance with the latest regulations. This cabinet is manufactured to CLASS 1 and requires a ground connection.

circuit or to a fused 3 AMP supply. Connections should


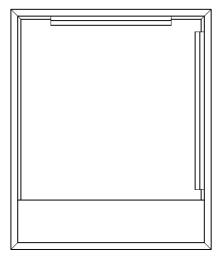


Illustration 1

Horizontal or Vertical Mount



#### **OPERATING INSTRUCTIONS**

Press the touch sensor to control the LED light to controlthe on/off and change the color temperature through the cycle of "on-4000K-6000K-3000K-off".

Keep pressing the touch sensor to control the brightness from bright to dark, or from dark to bright.




LTL HOME PRODUCTS, INC.



#### LED ILLUMINATED MIRROR


## **Installation Instructions**

Beacon / LI2537

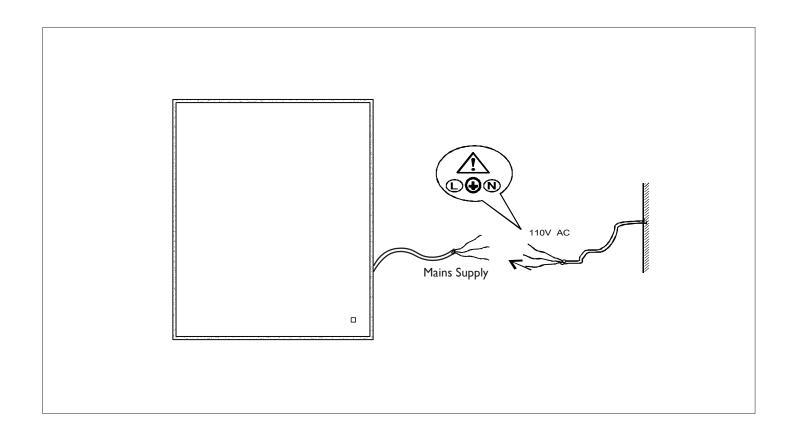

The next step is to make the electrical connection from the mirror to the main supply. Use the connection wire found at the rear of the mirror to make the necessary connections. A second person will need to hold the mirror in place whilst electrical connections are made.

### THIS PRODUCT IS MANUFACTURED TO CLASS I CATEGORY AND MUST HAVE AN EARTH CONNECTION.



! IF IN DOUBT CONSULTYOUR ELECTRICIAN!

