

1675 Locust Street Red Bud, IL 62278 • 888.403.7684 • Ultraplay.com

INSTALLATION GUIDELINE

USER GROUP: 2-5 Years

RECOMMENDED CREW: 4 People

TOOLS REQUIRED:

T-25, T-30, TT-30, 3/16" Allen, #1, #2 square drive

Level

Drill Bits: 3/32", 5/32", 7/64"

• High Speed 3/8" Electric Drill with Clutch

NOTE: Use of any other driver may result in damage to

product, tool, and/or hardware! INSTALLATION TIME: 3 Hours

WEIGHT: 805 lbs.


CONCRETE REQUIRED: None



Customer is responsible for verifying materials received by comparing received items with packing list. If any parts are missing or damaged, including documentation, contact your local sales representative immediately.

Supplier is not responsible for items discovered missing after 72 hours from time of delivery.

Before beginning installation, all installers must read and understand the Installation Introduction manual as supplied. If you did not receive a copy, or if you have any questions regarding any information in the Installation Instructions or this Installation Guideline, contact your local sales representative.

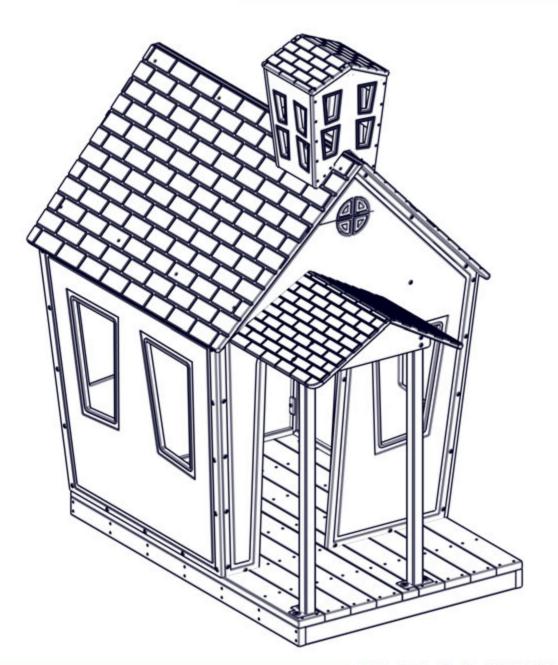








1675 Locust Street Red Bud, IL 62278 • 888.403.7684 • Ultraplay.com

INSTALLATION GUIDELINE

ITEM	Part No.	QTY	DESCRIPTION
1	AFB-31124XX	1	Widmnt - R-town School/House Back Panel Frame
2	AFB-31123XX	2	Widmnt - R-town School/House Side Panel Frame
3	TRA0162XX	1	Pre-Assem R-Town Deck
4	RSA-0561XX	1	Pre-Assem R-Town School Bell Tower
5	AFB-31130XX	1	Widmnt - R-town School/House Front Panel Frame
6	RSP-1670XX	2	Sheet - R-Town School Side
7	RSP-1671XX	1	Sheet - R-Town School Back
8	RSP-1672XX	1	Sheet - R-Town School Front
9	RSP-1674XX	2	Sheet - R-Town Roof
10	RSP-1669XX	1	Sheet - R-Town School Porch Roof Support
11	RSP-1677XX	1	Sheet - R-Town Porch Roof (Left Side)
12	RSP-1678XX	1	Sheet - R-Town Porch Roof (Right Side)
13	AFB-31145XX	1	Widmnt - R-town Porch Roof Support Post (Right)
14	AFB-31147XX	1	Widmnt - R-town Porch Roof Support Post (Left)
15	AFB-31149XX	2	Widmnt - R-town Roof Support Bottom
16	AFB-31150XX	2	Widmnt - R-town Roof Support Middle
17	AFB-31151XX	2	Widmnt - R-town Roof Support Top
18	HWS0021	60	Screw - 1/4" x 1" Self Tapping Torx w/Patch
19	HWS0298	29	Screw - 1/4" x 1-1/2" RSS SS
20	HWWR0092	4	Washer 3/8" ID x 1-1/4" OD Flat SS
21	HWS0107	2	Screw #8 x 1-5/8" Deck SS
22	HWB0344	4	Bolt - 5/16"-18 x 3/4" ABH SS
	HWN0149	4	Nut - 5/16 - Zn Insert Type I
24	HWWR0114	4	Washer 5/16 ID x 3/4 OD Flat .05
	HWS0081	81	3/8" x 1-1/4" Self Tapping Torx w/patch

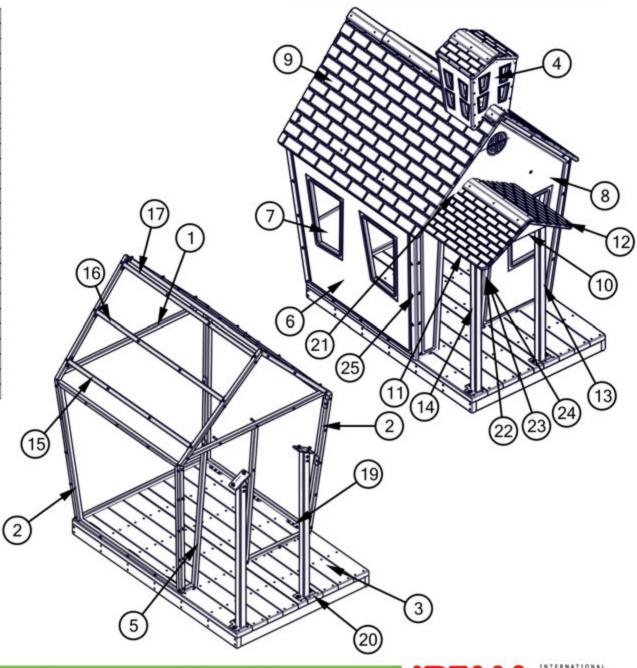


MODEL NUMBER: UPLAY-040



INSTALLATION GUIDELINE

STEP 1

Place deck into final location. Deck will not be moved once placed. Refer to the site plan drawing and site elevation drawing for placement of all structures. Installer is responsible for proper location of all structures. Either end of deck can be designated as the front.

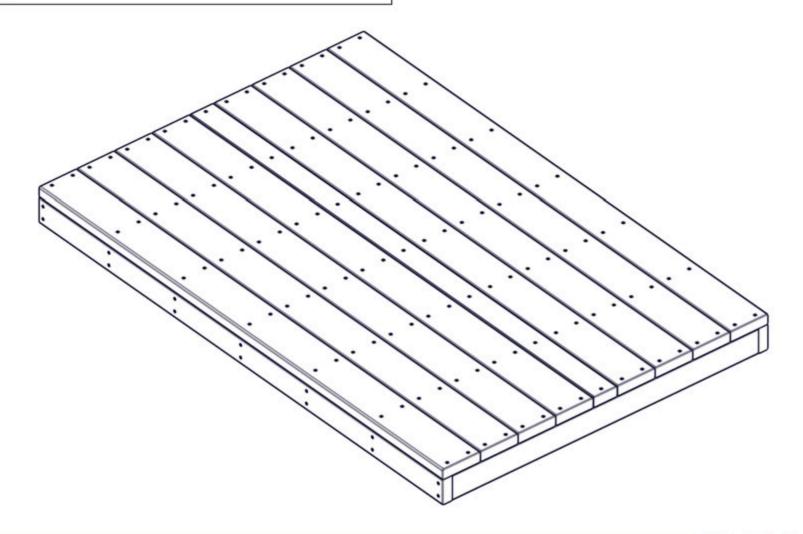







1675 Locust Street Red Bud, IL 62278 • 888.403.7684 • Ultraplay.com

INSTALLATION GUIDELINE


Drill 5/32" Pilot Hole


STEP 2


Mount rear frame and side frame. Place rear frame 3/4" from rear edge of deck. Center rear frame on deck. Place side frame 1/2" from side edge of deck. See Detail 2-1. At bottom plates on side frame, drill nine (9) 5/32" pilot holes through bottom plates into deck. Secure with nine (9) 1/4" x 1-1/2" RSS. At edge plates on side frame, secure with three (3) 1/4" x 1" self-tapping Torx. Pilot holes (5/32") may be required. Bracing may be required until all frames are mounted.

Secure With 1/4" x 1"
Self-Tapping Torx
Typ. 3

Detail 2-1

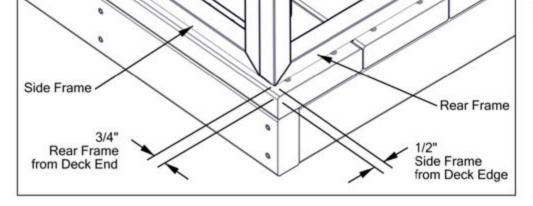

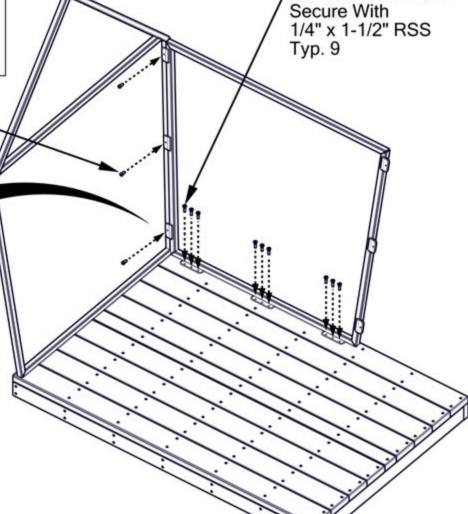





1675 Locust Street Red Bud, IL 62278 • 888.403.7684 • Ultraplay.com

INSTALLATION GUIDELINE

STEP 3

Secure side frame to rear frame. Place side frame 1/2" from side edge of deck. At bottom plates on side frame, drill nine (9) 3/16" pilot holes through bottom plates into deck. Secure with nine (9) 1/4" x 1-1/2" RSS. At edge plates on side frame, secure with three (3) 1/4" x 1" self-tapping Torx. Pilot holes (5/32") may be required. Bracing may be required until all frames are mounted.



Secure With - 1/4" x 1"

Self-Tapping Torx Typ. 3






INSTALLATION GUIDELINE

STEP 4


Secure front frame to side frames. Place front frame between side frames. At edge plates on side frames, secure with six (6) 1/4" x 1" self-tapping Torx. Pilot holes (5/32") may be required. At edge plate on bottom of front frame, drill three (3) 5/32" pilot holes through plate and into deck. Secure with three (3) 1/4" x 1-1/2" RSS.

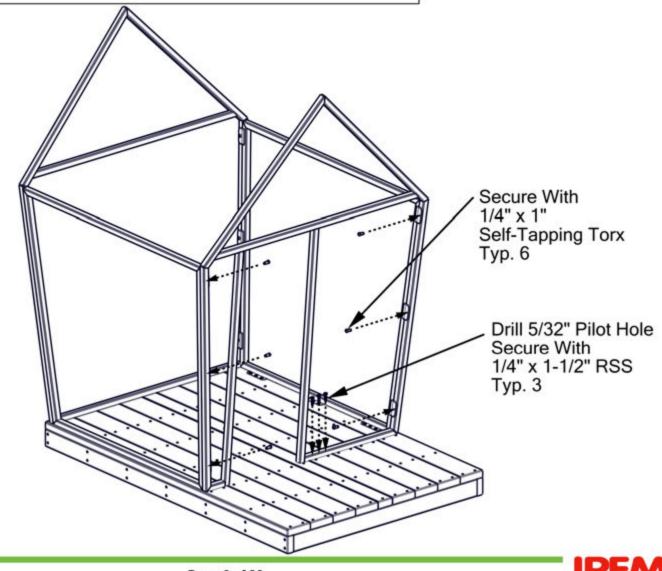



1675 Locust Street Red Bud, IL 62278 • 888.403.7684 • Ultraplay.com

INSTALLATION GUIDELINE

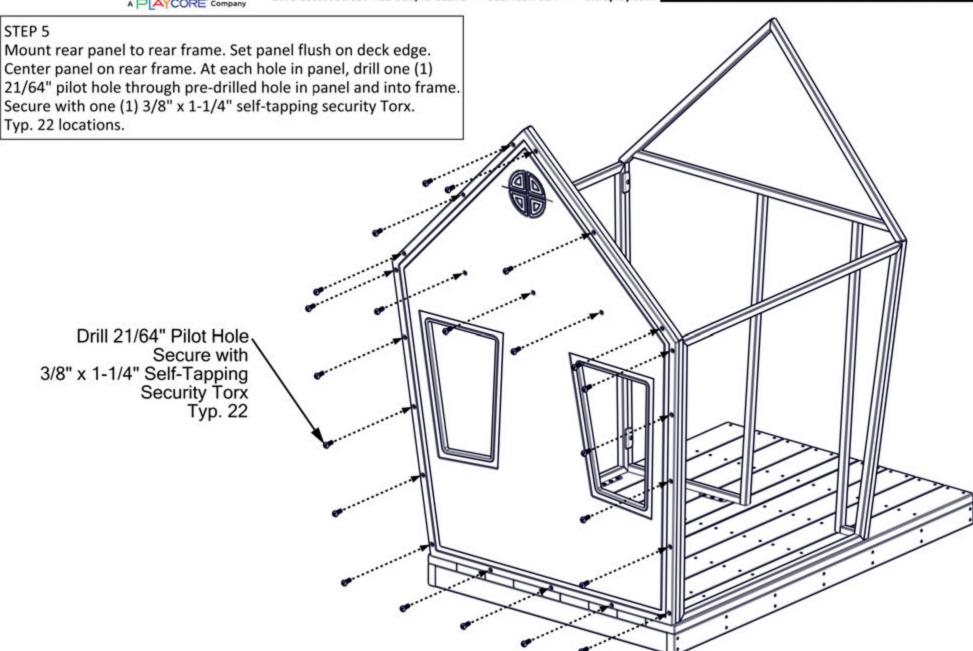


MODEL NUMBER: UPLAY-040





INSTALLATION GUIDELINE

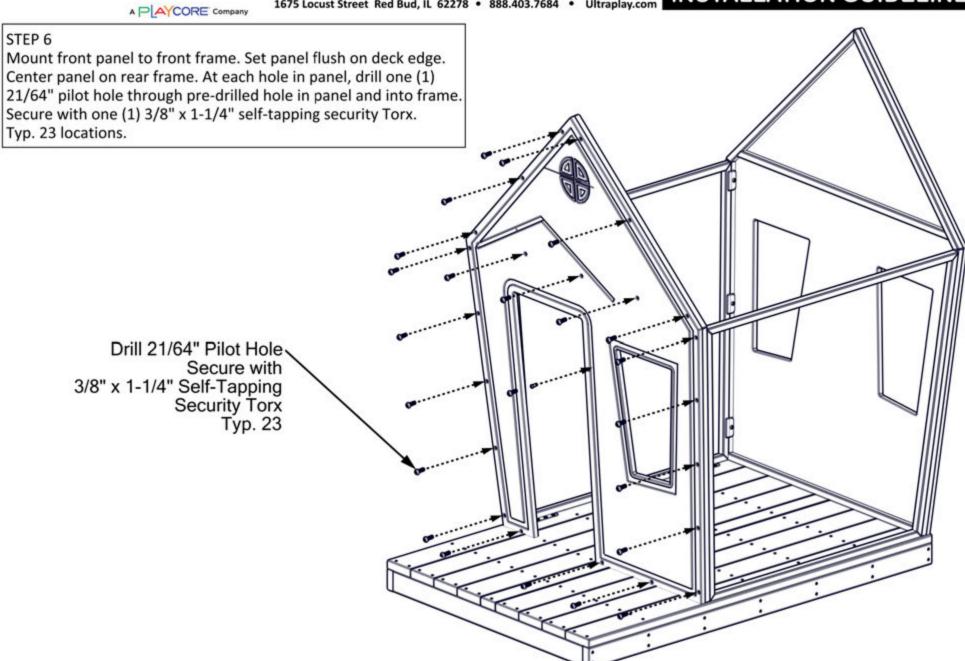

MODEL NUMBER: UPLAY-040 DATE: 01/29/20

Page 8 of 20





A PIAYCORE Company

1675 Locust Street Red Bud, IL 62278 • 888.403.7684 • Ultraplay.com

INSTALLATION GUIDELINE

STEP 7

Mount right side panel. Set panel flush on deck edge. Edges of panel should be flush with faces of front and rear panels. At each hole, drill one (1) 21/64" pilot hole through pre-drilled hole in panel and into frame. Secure with one (1) 3/8" x 1-1/4" self-tapping security Torx. Typ. 16 locations.

Drill 21/64" Pilot Hole Secure with 3/8" x 1-1/4" Self-Tapping Security Torx Typ. 16






1675 Locust Street Red Bud, IL 62278 • 888.403.7684 • Ultraplay.com

INSTALLATION GUIDELINE

STEP 8

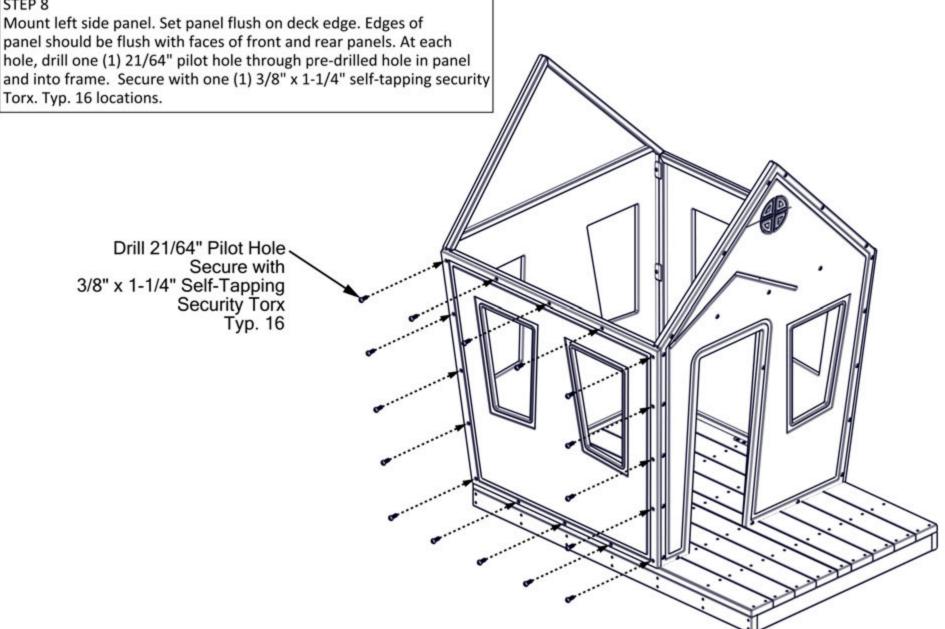




INSTALLATION GUIDELINE


STEP 9

Mount left side roof supports. Roof supports are three lengths. Measure from ridge of front and rear frames to bar of each roof support and mark positions. See Detail 9-1. Secure each end of roof supports with two (2) 1/4" x 1" self-tapping Torx. Repeat for opposite ends of roof supports.

A PAYCORE Company

Detail 9-1

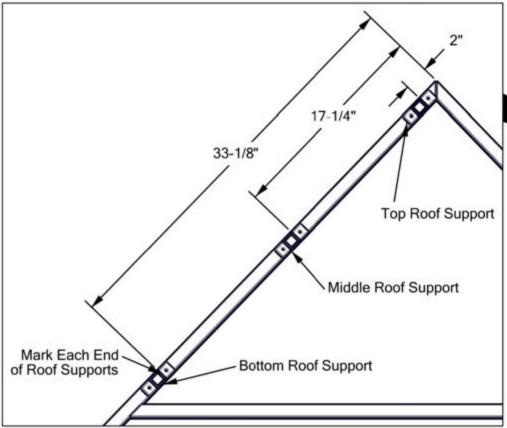

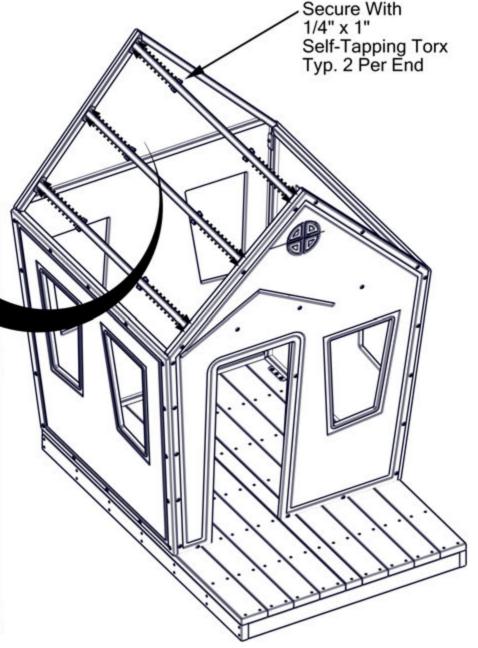










STEP 10

A PLAYCORE Company

1675 Locust Street Red Bud, IL 62278 • 888.403.7684 • Ultraplay.com

INSTALLATION GUIDELINE

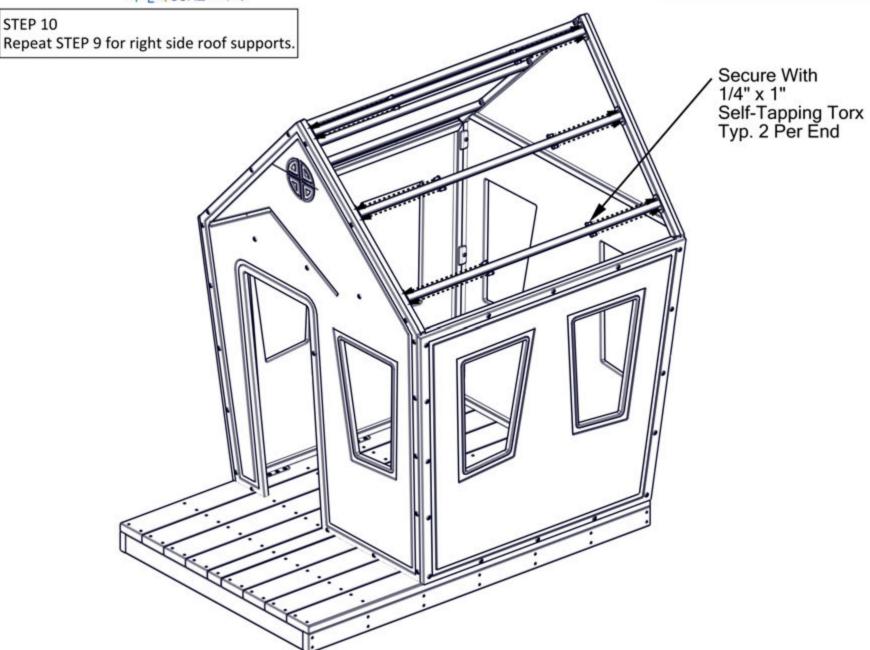



INSTALLATION GUIDELINE


1675 Locust Street Red Bud, IL 62278 • 888.403.7684 • Ultraplay.com

STEP 11


Mount right roof panel. Top edge of roof panel should be flush with frame ridges. See Detail 11-1. Center roof edges on front and rear frames. See Detail 11-2. Align countersunk holes in roof panel with roof support bars. At each countersunk hole, secure roof panel to roof supports with 1/4" x 1" self-tapping Torx. Typ. 12 locations.


Secure With 1/4" x 1" Self-Tapping Torx Typ. 12

Detail 11-1

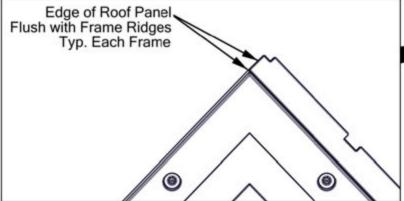



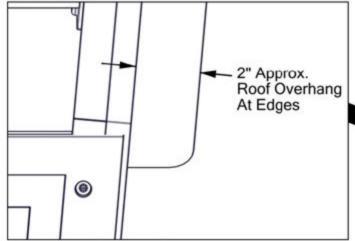

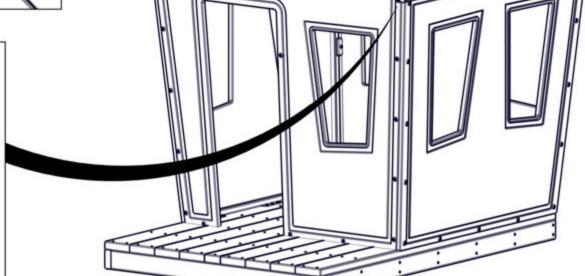

MODEL NUMBER: UPLAY-040





Repeat STEP 11 for left roof panel.

STEP 12

INSTALLATION GUIDELINE 1675 Locust Street Red Bud, IL 62278 • 888.403.7684 • Ultraplay.com

Secure With 1/4" x 1" Self-Tapping Torx Typ. 12

A PLAYCORE Company

MODEL NUMBER: UPLAY-040 DATE: 01/29/20



1675 Locust Street Red Bud, IL 62278 • 888.403.7684 • Ultraplay.com

INSTALLATION GUIDELINE


STEP 13 Secure knock-in nuts into porch roof panels. Temporarily place porch roof panels into slots on front panel. Place porch support posts 1" from front edge of deck. Ensure posts are plumb. Roof Edges At the top end of each support post, drill two (2) 1/4" pilot holes In Grooves through top end of support post and through porch roof panel. On Front Panel From shingle side of roof panel, insert two (2) 5/16" knock-in nuts. Drill 1/4" Pilot Hole Insert 5/16" Knock-In Nut From Shingle Side Typ. 2 Per Porch Roof Panel



A PAYCORE Company 1675 Locust Street Red B

1675 Locust Street Red Bud, IL 62278 • 888,403,7684 • Ultraplay.com

INSTALLATION GUIDELINE

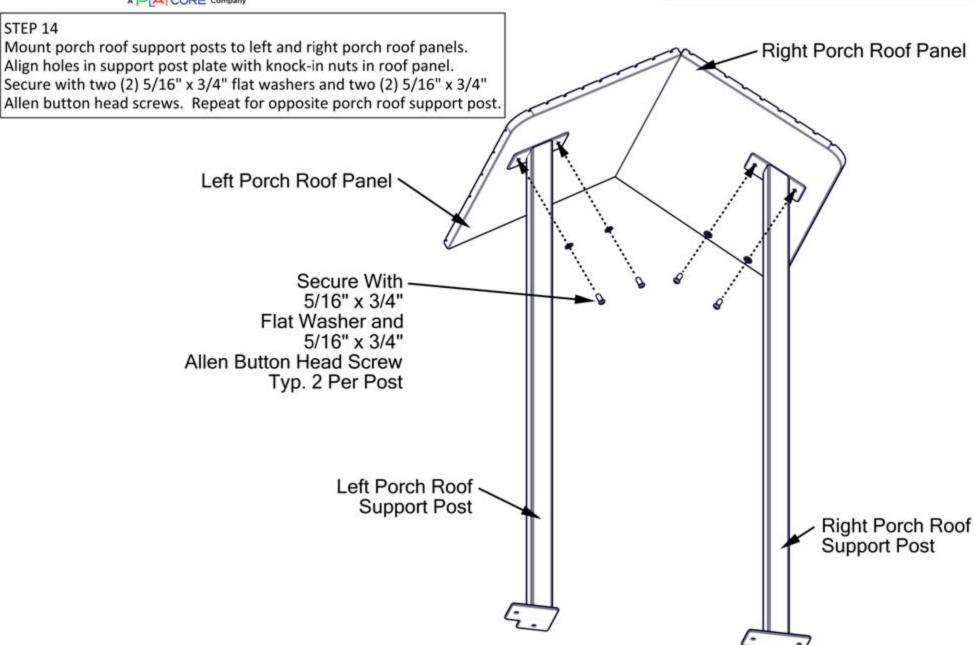

MODEL NUMBER: UPLAY-040 DATE: 01/29/20 PLAY EQUIPMENT MANUFACTURERS
MEMBER




INSTALLATION GUIDELINE

STEP 15

Mount porch roof support. Ensure top edge of roof support is flush against roof panels. Ensure pre-drilled holes in roof support are centered on support posts. Drill four (4) 21/64" pilot holes through pre-drilled holes in panel and into support posts. Secure with four (4) 3/8" x 1-1/4" self-tapping security Torx.

A PAYCORE Company

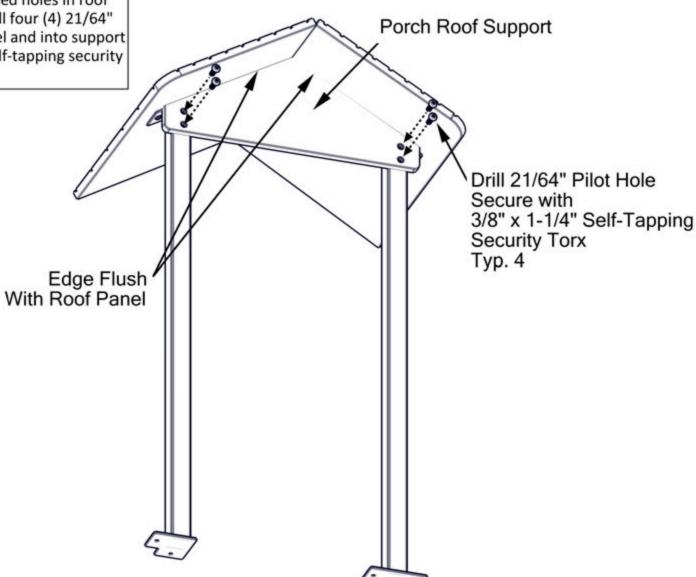

PLAY EQUIPMENT
MANUFACTURERS
ASSOCIATION




1675 Locust Street Red Bud, IL 62278 • 888.403.7684 • Ultraplay.com


INSTALLATION GUIDELINE

STEP 16

Secure porch assembly to deck. Place porch assembly around front panel door. Place rear edges or porch roof into grooves on front panel. Place feet of support posts 1" from edge of deck. Ensure support posts are plumb. Drill two (2) 5/32" holes through support post foot into deck. Secure with two (2) 3/8" x 1-1/4" flat washers and two (2) 1/4" x 1-1/2" RSS. See Detail 16-1. Repeat for opposite support post.

Detail 16-1

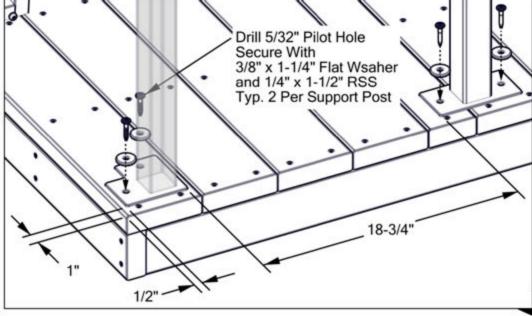

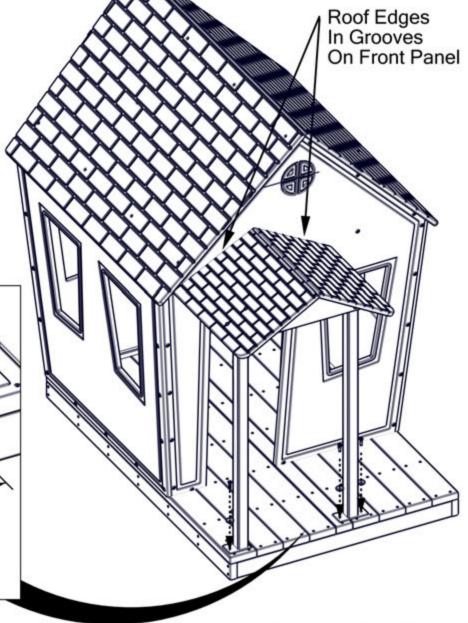

MODEL NUMBER: UPLAY-040





A PIAYCORE Company 1675 Locust Street Red Bud, IL 62278 • 888.403.7684 • Ultraplay.com


INSTALLATION GUIDELINE


Roof Edges

STEP 17

Secure porch roof edge to front panel. From inside house, drill two (2) 7/64" pilot holes through pre-drilled holes in front panel into edge of roof panels. Secure with two (2) #8 x 1-5/8" deck screws. See Detail 17-1.

Detail 17-1



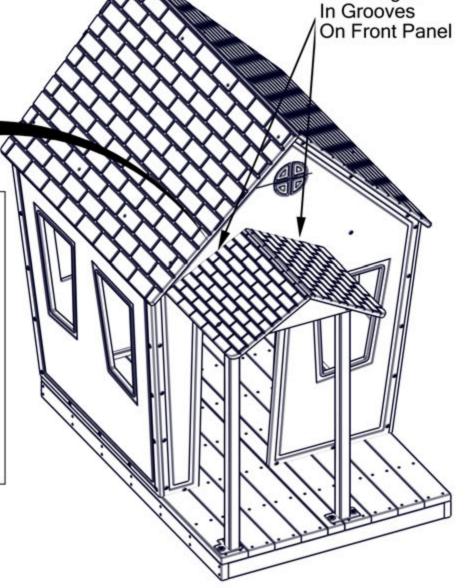









INSTALLATION GUIDELINE

1675 Locust Street Red Bud, IL 62278 • 888.403.7684 • Ultraplay.com

STEP 18

Mount bell tower to roof panels. Place bell tower assembly 5" from gable end of roof. From inside house, drill four (4) 5/32" pilot holes through roof panels into bell tower Trex base. Secure with four (4) 1/4" x 1-1/2" RSS. See Detail 18-1. Check all connections and ensure structure is stable. Installation is complete. Place one (1) Age Appropriate Sticker on structure in a clearly visible location.

Detail 18-1

