QUICKSTART GUIDE

CONNECT BLUETOOTH[®] WIRELESS HEADPHONE SYSTEM FOR TV

Includes Bluetooth Wireless Audio Transmitter and Matrix3 Wireless HD Headphones

www.MEEaudio.com/T1M3






Visit **MEEaudio.com/ConnectHelp** for easy-to-follow setup videos, full user manuals, and the latest troubleshooting information.



CONNECT BLUETOOTH® WIRELESS HEADPHONE SYSTEM FOR TV


FOR ADDITIONAL SUPPORT


- View and download complete user manuals for Connect transmitter and Matrix3 headphones at MEEaudio.com/Support
- View our Connect Support Guide at MEEaudio.com/ConnectHelp for easy-to-follow setup videos and troubleshooting information
- Contact us at support@MEEaudio.com

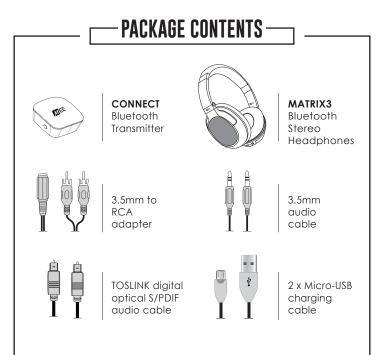

PLUG USB POWER CABLE INTO TRANSMITTER



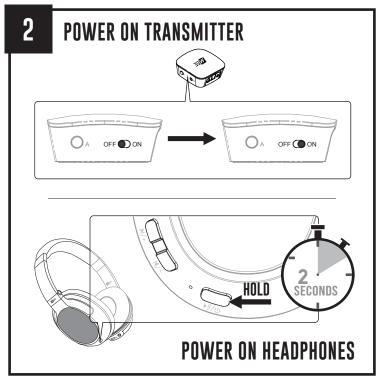

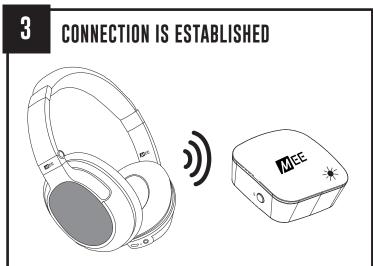

solid blue light on transmitter indicates connection

IF NO SOLID BLUE LIGHT, PERFORM PAIRING PROCEDURE IN STEP 6

*EXACT MENU AND ITEM NAMES MAY VARY BETWEEN TVS

PROCEED TO STEP 5

*if sound is still not audible, select "PCM / Stereo" in the audio output settings menu(s) of your video streaming app(s) and/or device(s)

select "PCM / Stereo" in the audio output settings menu* of your TV

DIGITAL AUDIO OUTPUT


SETTINGS

PCM / STEREO DTS

AUTO DOLBY DIGITAL

NO SOUND? CHECK TV SETTINGS MENU.⁺

IF TV AUDIO PLAYS FROM HEADPHONE, Setup IS complete. Proceed to step 5.

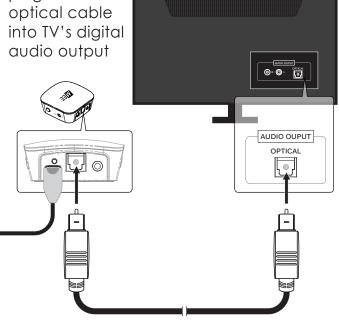


plug the

remove protective caps

OPTICAL S/PDIF [DIGITAL]

4. CHOOSE AN AUDIO CABLE SUPPORTED BY YOUR TV

4. CHOOSE AN AUDIO CABLE SUPPORTED BY YOUR TV

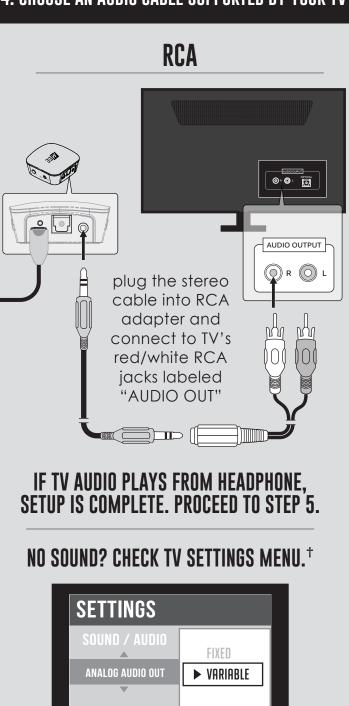

select "Variable" in the audio output settings menu of your TV

SETTINGS	
SOUND / AUDIO	ON • OFF
•	


set TV's internal speakers to "OFF"

PROCEED TO STEP 5


*EXACT MENU AND ITEM NAMES MAY VARY BETWEEN TVS

4. CHOOSE AN AUDIO CABLE SUPPORTED BY YOUR TV


3.5MM [HEADPHONE JACK]

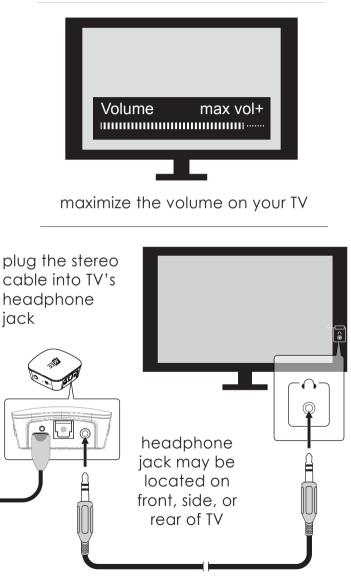

ADJUSTING HEADPHONE VOLUME

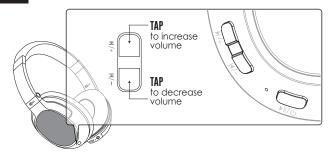

WHEN FINISHED, POWER OFF HEADPHONES UNTIL NEXT USE

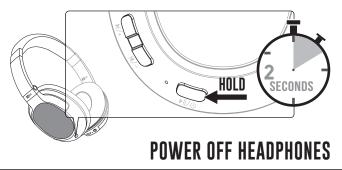

5

ADDITIONAL INFORMATION

connect

PAIRING A HEADPHONE

This procedure is used to pair an additional headphone or speaker with the Connect, or to re-pair the Matrix3.

Make sure your Bluetooth headphone or speaker is turned off. Put it in pairing mode. Consult the user manual of the headphone or speaker if you are not sure how to enter pairing mode.

Once the headphone or speaker is in pairing mode, click pairing button "A" located on the side of the Connect (use pairing button "B" when pairing a second headphone or speaker). A blue light will blink rapidly on the top of the unit to indicate that the Connect is ready to pair. Once paired, the light will turn solid blue.

FACTORY RESET/CLEAR MEMORY

The Connect can be reset by holding pairing button "A" for approximately 5 seconds, until the blue indicator light stops blinking. All previously paired devices will be cleared from memory and a new pairing will need to be created by following the procedure in the previous step.

6


PAIRING WITH OTHER DEVICES

The Matrix3 can be used as a headset when connected to phones and tablets. It will first need to be paired with each device. To pair the Matrix3 with a new device, put it in pairing mode by holding the Power / Multifunction button for about 4 seconds until the status indicator light begins to flash red and blue in an alternating pattern and the headphone says "Ready to Pair".

Open the Bluetooth Settings menu on your device and turn on Bluetooth, Select "Search for Devices" or "Refresh" if your phone or tablet does not automatically search for new devices. Select "MEE audio Matrix3-LL" on the screen of your device and follow any further prompts to pair. Once connected, the status indicator light on the Matrix3 will turn solid blue.

CONTROLS WITH PHONES AND TABLETS

The headphone controls on the Matrix3 are located on the right earcup.

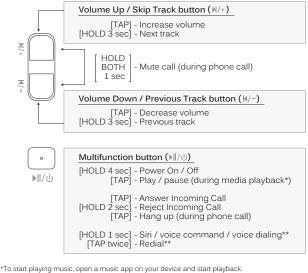

*Not all devices support this functionality. For more information, refer to the user manual for your device.

SAFETY AND CARE

- Battery performance will be severely decreased when stored in extreme temperatures: below -10°C/14°F or above 45°C/113°F including direct sunlight.
- The lifetime of the battery will be significantly reduced if your device is not charged for a long time. It is recommended to charge your device at least once a month.
- Clean with a soft, slightly damp cloth. Do not use chemical cleaners.
- There are no user replaceable/reparable parts in this device. Disassembling it will void your warranty.
- Do not expose the device to liquids. If the device comes in contact with liquids, quickly wipe away.
 If submersed in water, do not turn the device on until completely dried.
 Note: liquid submersion voids the warranty.
- Do not use around flammable gasses as fire or explosion may occur

WARRANTY MEE audio products purchased from authorized resellers are covered by a 1-year manufacturer warranty. For more information, visit www.MEEaudio.com/Support

WARNING

Using headphones at high to moderate volumes for extended periods of time will result in permanent hearing damage. It is advised you keep volume levels moderate to low at all times for your safety. Do not use while driving a car, cycling, operating machinery, or performing other activities that require hearing surrounding sounds.

Keep the device and packaging out of reach of children.





Qualcomm[®] aptX[®] low latency



MEE audio and its logo are registered trademarks of S2E, Inc. All rights reserved.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by MEE audio is under license. Other trademarks and trade names are those of their respective owners

Qualcomm[®] aptX[™] is a product of Qualcomm Technologies International, Ltd. Qualcomm is a trademark of Qualcomm Incorporated, registered in the United States and other countries, used with permission. aptX is a trademark of Qualcomm Technologies International, Ltd., registered in the United States and other countries, used with permission.

connect

QUESTIONS? WE'RE HERE TO HELP!

Phone Support: 626-965-1008 x31 Monday ~ Friday 9am to 5:30pm PST

Email Support: support@MEEaudio.com All emails are responded to within 2 business days

