

STEPS
1&2

14-Balloon Tree Kit Kit Assembly



Please inflate all balloons within 30 days of purchase to comply with Warranty Guidelines.

WHAT YOU'LL NEED



White Cluster Brackets



White Cluster Pole
(1 pc.)

(Shown in gray for clarity)

Attach Brackets

(If not pre-assembled)

Orient pole with snap-buttons closest to the top. Slide top bracket over top of pole with ports and arrows facing upward. Press snap-button in and lock bracket into place. Repeat with bottom bracket from bottom of pole.



White Pole Kit Adapter
(1 pc.)

(Shown in grey for clarity)



Valved Cup
(14 pcs.)



13" Balloons
(14 pcs.)



Short Stems
(13 pcs.)




Long Stem
(1 pc.)


INFLATION/ASSEMBLY

1.1

Twist as you push the balloon opening down onto inflation port of valved cup. Make sure the balloon is seated all the way at the bottom of the valved cup.

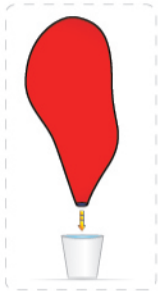

TIP: Dip open end of balloon 1/4" into water before attaching to valved cup to make assembly easier.

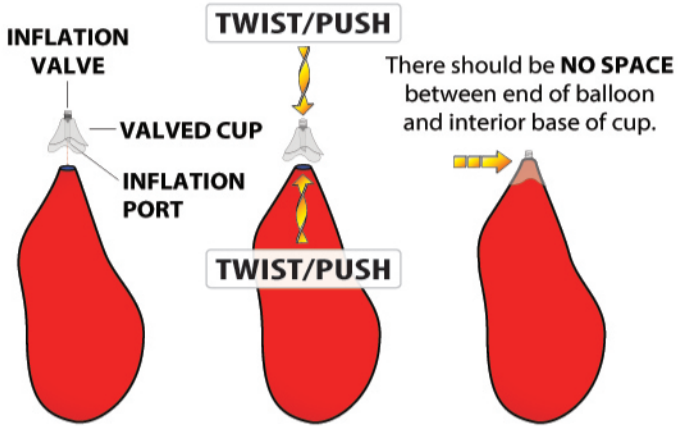

Inflate using a pump or compressor compatible with a needle-style inflation tip. Moisten needle before inserting and slowly push while twisting into black valve. Inflate to a 8 1/2" diameter or 26.7" circumference (use included Balloon Sizing Band shown below if needed). Place a finger next to the needle and threaded end of valved cup to prevent valve from coming out upon needle removal.

NOTE: Wear safety glasses during inflation.

Needle-style Inflation Tip
Included With Kit



**DO NOT OVER-INFLATE!
BALLOON MAY BURST
AND CAUSE INJURY!!!**




**USE EYE PROTECTION
WHEN INFLATING!!!**

8.5"

BALLOON SIZING BAND 8 1/2" ←


Band Included With Kit

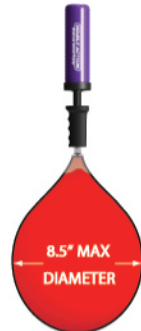

STEM/ATTACHMENT


1.2

Attach stem to cup by threading the cup and stem tightly together until they click-lock securely in place.

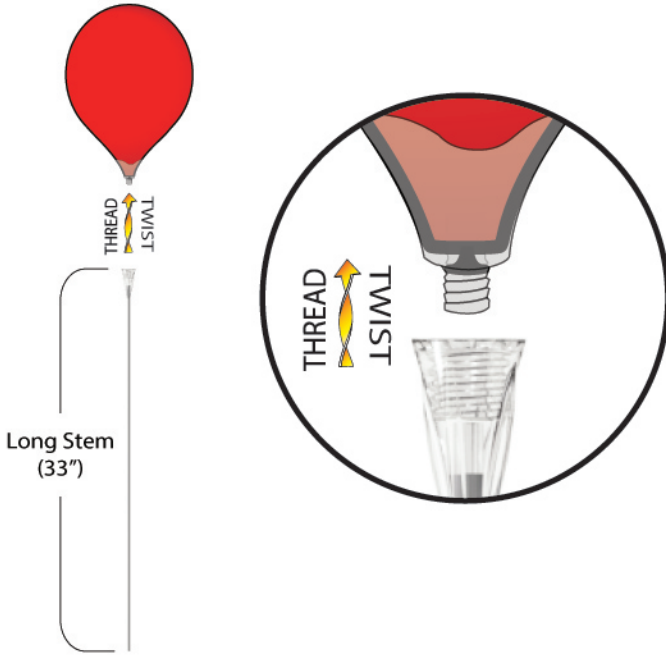

1.3


Repeat assembly, inflation and attachment process with the remaining balloons and hardware included.

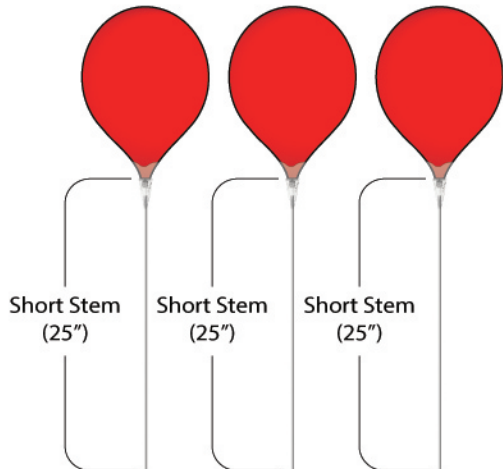

IMPORTANT The Long Stem must be placed at the top of the assembly in the center position of the Pole Kit Adapter.


1.4

Align adapter push-button so that it locks into place through the hole in the pole.

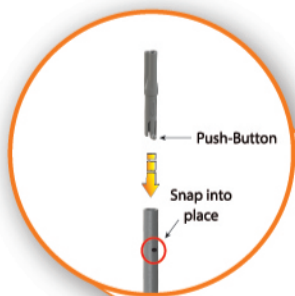

1.5

Place the long stem in the center of the adapter with 3 short stems surrounding it as shown below.

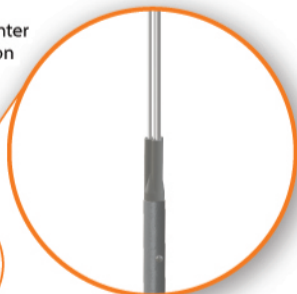


Pole Kit Adapter
Top View



- 1-Long Stem
- 2-Short Stem
- 3-Short Stem
- 4-Short Stem

1.6

The remaining 10 stems should all be short stems. Place 5 in each bracket.

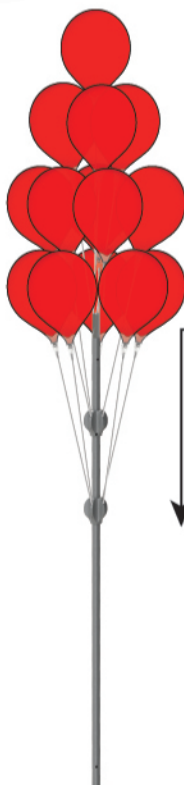


NOTE:

When attaching stems, work your way down from top to bottom. This will allow easier access to stem brackets.

2.1

Assemble your chosen mounting option shown below using Step 3 to complete your 14 Balloon Pole Kit.

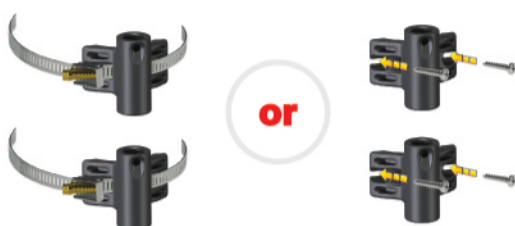

**BAND CLAMP or SCREW
POLE HOLDER BRACKETS**



WEIGHTED BASE



FOLD-OUT BASE

OTHER GREAT PRODUCTS!



CUSTOMIZABLE • FAST SHIPPING • NO MINIMUM

MOUNT ANYWHERE



Premium 5-Balloon Cluster Pole Kit



ALL THE COLORS YOU NEED!



Premium 3-Balloon Cluster Pole Kit

LEARN MORE

HELIUM-FREE



REUSABLE



LONG-LASTING



SEE WHAT'S NEW! **CONTACT US TODAY!**