


LED LAY IN TROFFER - CENTER BASKET


1X4', 2X2', 2X4'




2X4' 30W 40W 50W

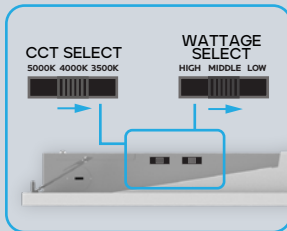



DRIVER WITH CCT & WATTAGE SELECT SWITCH

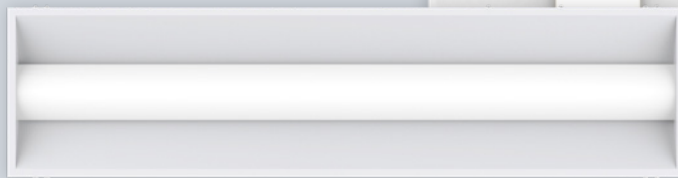


1X4' 16W 20W 30W




2X2' 20W 30W 40W

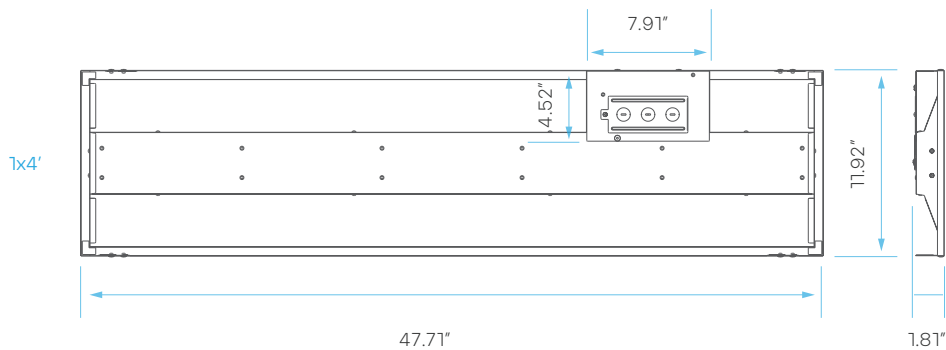

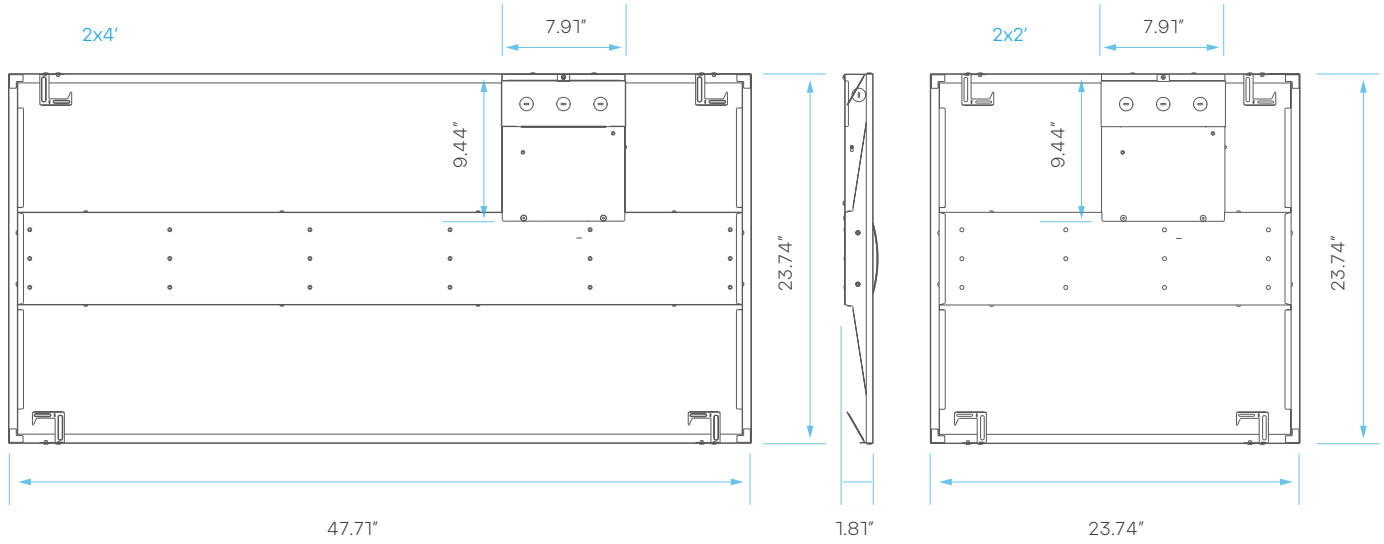

MAKEUP OF CCT & WATTAGE SELECT TROFFER

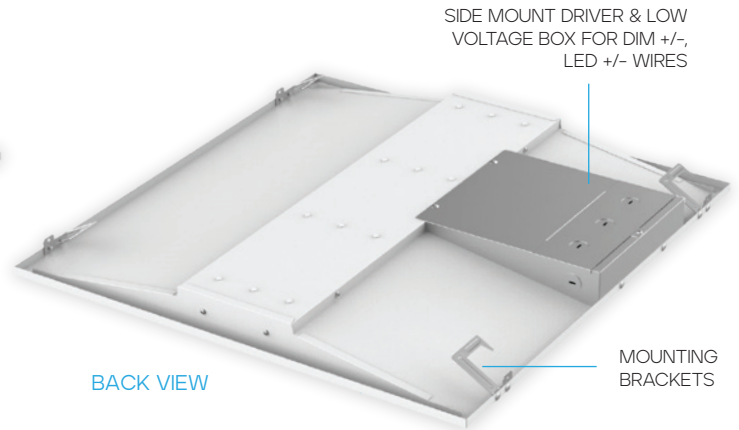

1X4 TROFFER	2X2 TROFFER	2X4 TROFFER
3500K <input type="checkbox"/> 16W <input type="checkbox"/>	3500K <input type="checkbox"/> 20W <input type="checkbox"/>	3500K <input type="checkbox"/> 30W <input type="checkbox"/>
4000K <input type="checkbox"/> 20W <input type="checkbox"/>	4000K <input type="checkbox"/> 30W <input type="checkbox"/>	4000K <input type="checkbox"/> 40W <input type="checkbox"/>
5000K <input type="checkbox"/> 30W <input type="checkbox"/>	5000K <input type="checkbox"/> 40W <input type="checkbox"/>	5000K <input type="checkbox"/> 50W <input type="checkbox"/>

CCT & WATTAGE SELECT SWITCH



ELECTRICAL

	MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	LIFETIME	COST/YR
1X4'	LR25135	LED1X4TROF/CB/3WO/3CCT/D	30	120-277V	125	50,000	\$ 2.40
	LR25135-20W	LED1X4TROF/CB/3WO/3CCT/D-20W	20				
	LR25135-16W	LED1X4TROF/CB/3WO/3CCT/D-16W	16				
2x2'	LR25136	LED2X2TROF/CB/3WO/3CCT/D	40	120-277V	125	50,000	\$ 3.61
	LR25136-30W	LED2X2TROF/CB/3WO/3CCT/D-30W	30				
	LR25136-20W	LED2X2TROF/CB/3WO/3CCT/D-20W	20				
2x4'	LR25137	LED2X4TROF/CB/3WO/3CCT/D	50	120-277V	125	50,000	\$ 4.81
	LR25137-40W	LED2X4TROF/CB/3WO/3CCT/D-40W	40				
	LR25137-30W	LED2X4TROF/CB/3WO/3CCT/D-30W	30				

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	UL	DLC
LR25135	LED1X4TROF/CB/3WO/3CCT/D			3750 (@30W)			
LR25135-20W	LED1X4TROF/CB/3WO/3CCT/D-20W	3500K/4000K/5000K	CCT SELECT	2500 (@20W)	80	YES	YES
LR25135-16W	LED1X4TROF/CB/3WO/3CCT/D-16W			2000 (@16W)			
LR25136	LED2X2TROF/CB/3WO/3CCT/D			5000 (@40W)			
LR25136-30W	LED2X2TROF/CB/3WO/3CCT/D-30W	3500K/4000K/5000K	CCT SELECT	3750 (@30W)	80	YES	
LR25136-20W	LED2X2TROF/CB/3WO/3CCT/D-20W			2500 (@20W)			
LR25137	LED2X4TROF/CB/3WO/3CCT/D			6250 (@50W)			
LR25137-40W	LED2X4TROF/CB/3WO/3CCT/D-40W	3500K/4000K/5000K	CCT SELECT	5000 (@40W)	80	YES	YES
LR25137-30W	LED2X4TROF/CB/3WO/3CCT/D-30W			37500 (@30W)			

COMPATIBLE WITH:

LR35122
Emergency LED Driver



LR24183
4' CABLE EXTENDER

