




TRIMLESS FINISH


## 2 SIMPLE STEPS

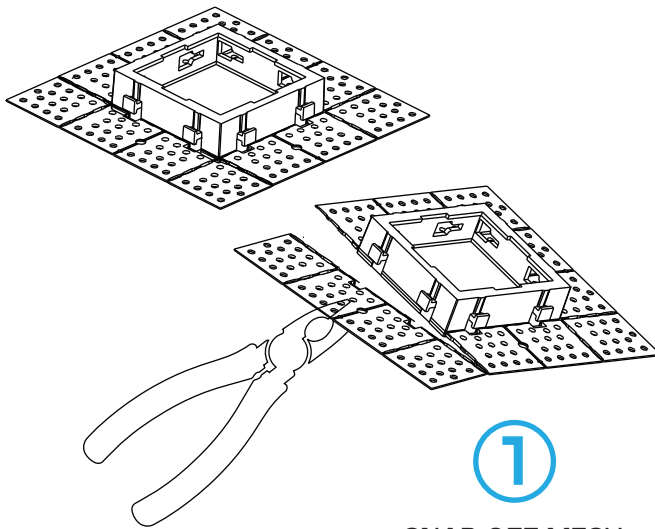

1

SNAP OFF MESH

2 MATCH SIDES & INTERLOCK IN PLACE

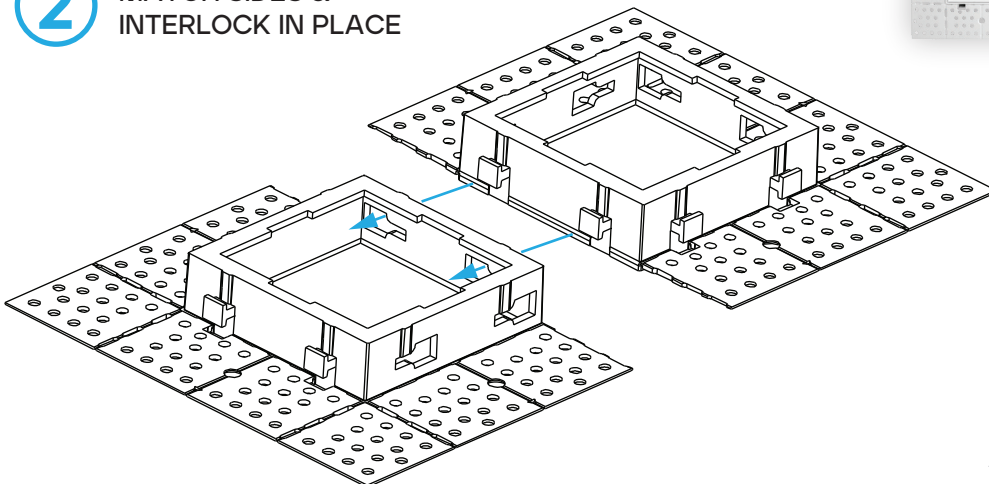

ENDLESS CONFIGURATION OPTIONS



## LED SPOTLIGHT-CANLESS

### INTERLOCKING TRIMLESS MODULE - CCT SELECT

1", 2", 3", 4" - HIGH OUTPUT OPTION AVAILABLE




## TRIMLUX

INTERLOCKING TRIMLESS MODULE

1"

LR25470

500 LUMENS



2"


LR25475

600 LUMENS

LR25480

1000 LUMENS


HIGH OUTPUT

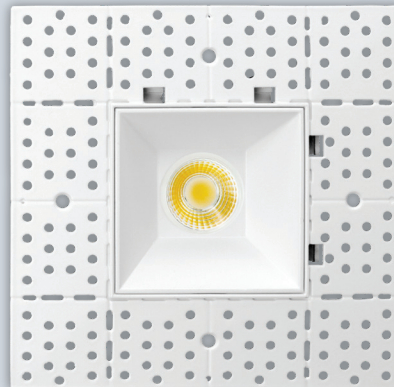

3"

LR25485


1000 LUMENS

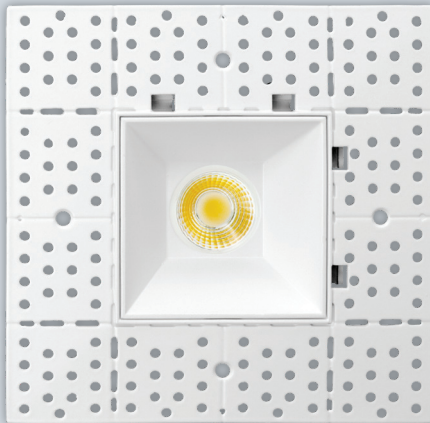

4"


LR25490

1000 LUMENS

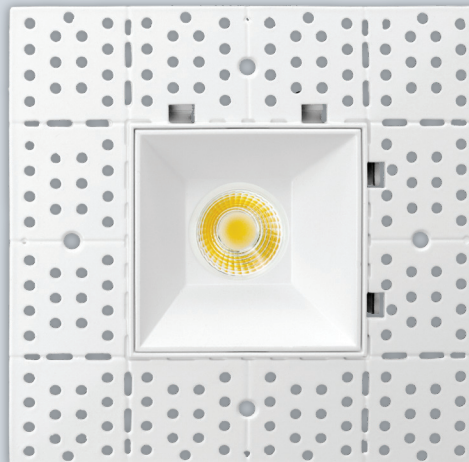

#### AVAILABLE COMPONENTS

\*SOLD SEPARATELY



INTERLOCKING MESH SPARE

|              |              |
|--------------|--------------|
| 1" - LR25471 | 3" - LR25486 |
| 2" - LR25476 | 4" - LR25491 |



BLACK TRIM INSERT

|              |              |
|--------------|--------------|
| 1" - LR25472 | 3" - LR25487 |
| 2" - LR25477 | 4" - LR25492 |

CRI  
90

COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K

DIMMABLE

AIR  
TIGHT

IC  
RATED

WET  
LOCATION  
RATED

120V

5  
YEAR  
WARRANTY


## ELECTRICAL

|    | MODEL   | DESCRIPTION                | POWER | INPUT VOLTS | EFFICACY | FLOOD | LIFETIME | COST/YR |
|----|---------|----------------------------|-------|-------------|----------|-------|----------|---------|
| 1" | LR25470 | LED/ITLMD1/5CCT/SQ/WT/D    | 7     | 120V        | 71       | 38°   | 50,000   | \$ 0.84 |
| 2" | LR25475 | LED/ITLMD2/5CCT/SQ/WT/D    | 8     | 120V        | 75       | 38°   | 50,000   | \$ 0.96 |
|    | LR25480 | LED/ITLMD2/HO/5CCT/SQ/WT/D | 15    | 120V        | 67       | 38°   | 50,000   | \$ 1.80 |
| 3" | LR25485 | LED/ITLMD3/5CCT/SQ/WT/D    | 15    | 120V        | 67       | 38°   | 50,000   | \$ 1.80 |
| 4" | LR25490 | LED/ITLMD4/5CCT/SQ/WT/D    | 15    | 120V        | 67       | 38°   | 50,000   | \$ 1.80 |

## PHOTOMETRIC


| MODEL   | DESCRIPTION                | COLOR (CCT)                   | TEMP       | LUMEN | CRI | ETL LISTED |
|---------|----------------------------|-------------------------------|------------|-------|-----|------------|
| LR25470 | LED/ITLMD1/5CCT/SQ/WT/D    | 2700K/3000K/3500K/4000K/5000K | CCT SELECT | 500   | 90  | YES        |
| LR25475 | LED/ITLMD2/5CCT/SQ/WT/D    | 2700K/3000K/3500K/4000K/5000K | CCT SELECT | 600   | 90  | YES        |
| LR25480 | LED/ITLMD2/HO/5CCT/SQ/WT/D | 2700K/3000K/3500K/4000K/5000K | CCT SELECT | 1000  | 90  | YES        |
| LR25485 | LED/ITLMD3/5CCT/SQ/WT/D    | 2700K/3000K/3500K/4000K/5000K | CCT SELECT | 1000  | 90  | YES        |
| LR25490 | LED/ITLMD4/5CCT/SQ/WT/D    | 2700K/3000K/3500K/4000K/5000K | CCT SELECT | 1000  | 90  | YES        |

## DIMENSIONS

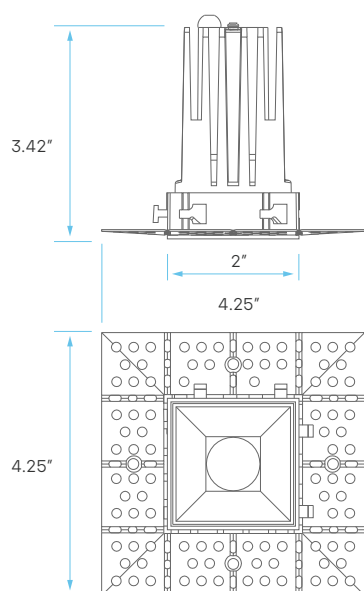


CUTOUT: 2.44" X 2.44"

1"

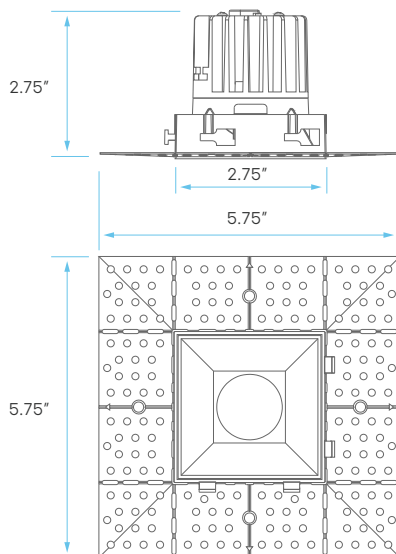

CUTOUT: 3.25" X 3.25"


2"

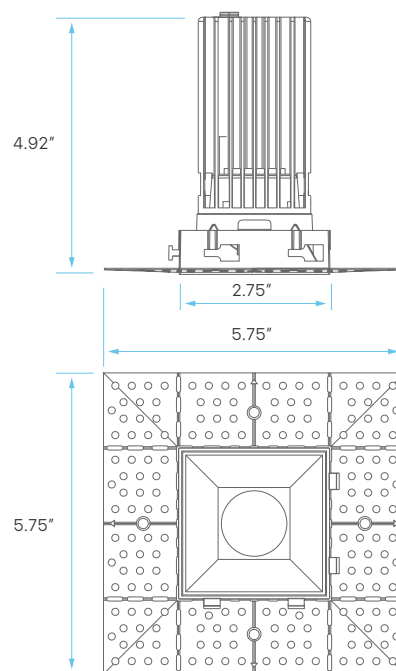


CUTOUT: 3.25" X 3.25"

2" - HIGH OUTPUT

## DIMENSIONS

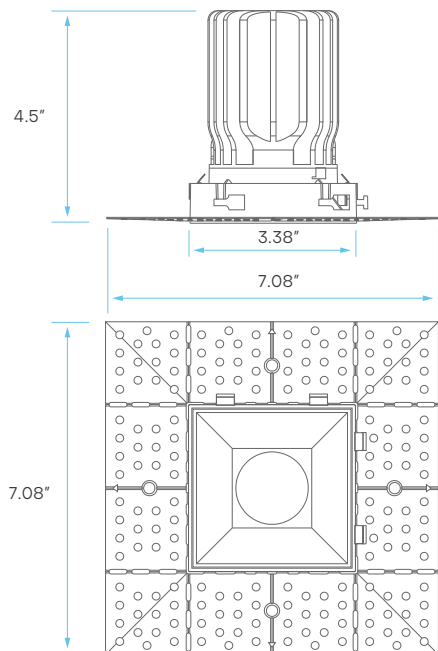

CUTOUT: 3.93" X 3.93"  
3"

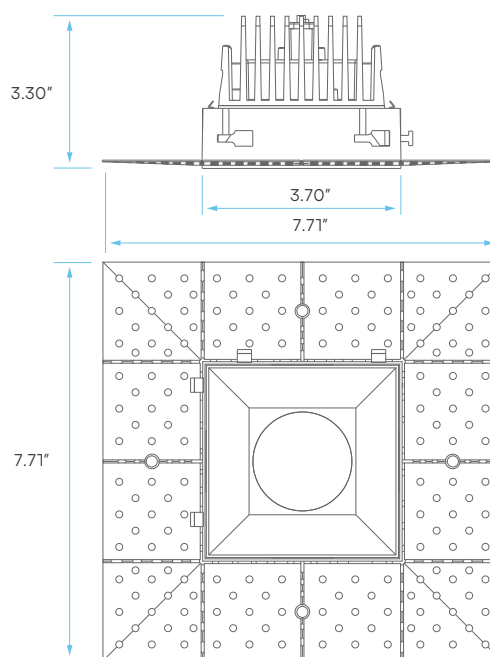


CUTOUT: 4.25" X 4.25"  
4"

## AVAILABLE COMPONENTS

\*SOLD SEPARATELY

### INTERLOCKING MESH SPARE



|    | MODEL                   | DESCRIPTION        |
|----|-------------------------|--------------------|
| 1" | <a href="#">LR25471</a> | LED/ITLMD1/SQ/MESH |
| 2" | <a href="#">LR25476</a> | LED/ITLMD2/SQ/MESH |
| 3" | <a href="#">LR25486</a> | LED/ITLMD3/SQ/MESH |
| 4" | <a href="#">LR25491</a> | LED/ITLMD4/SQ/MESH |

### BLACK TRIM INSERT



|    | MODEL                   | DESCRIPTION           |
|----|-------------------------|-----------------------|
| 1" | <a href="#">LR25472</a> | LED/ITLMD1/SQ/TRIM/BK |
| 2" | <a href="#">LR25477</a> | LED/ITLMD2/SQ/MESH    |
| 3" | <a href="#">LR25487</a> | LED/ITLMD3/SQ/MESH    |
| 4" | <a href="#">LR25492</a> | LED/ITLMD4/SQ/MESH    |

## COMPATIBILITY




COMPATIBLE  
WITH:

**LR35126**  
Emergency  
LED Driver





## TRIMLESS FINISH INSTALLATION



STEP 1.




STEP 2.



STEP 3.



STEP 4.




## INTERLOCKING FEATURE

## 2 SIMPLE STEPS


1

SNAP OFF MESH

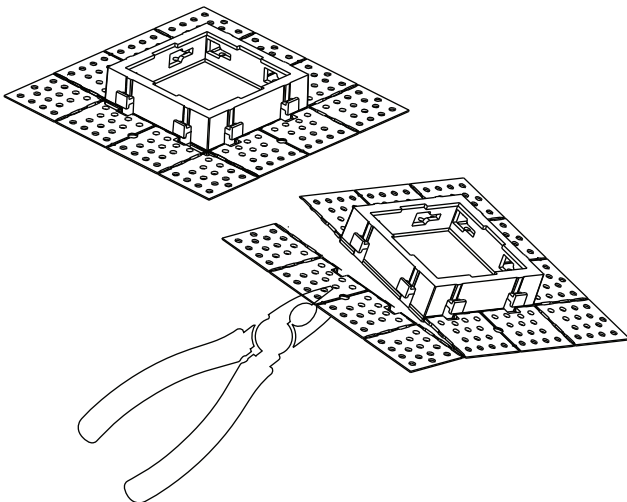

2

MATCH SIDES & INTERLOCK IN PLACE

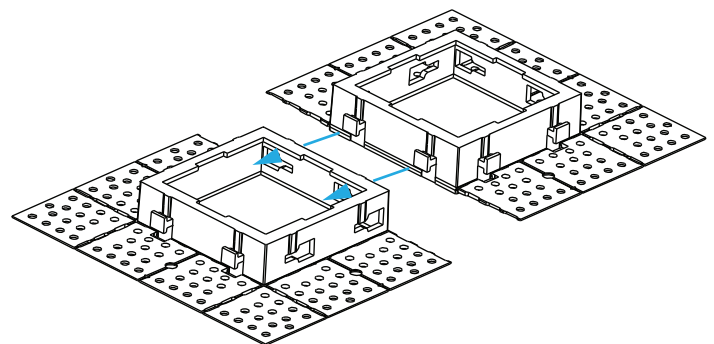

**TRIMLUX**  
INTERLOCKING TRIMLESS MODULE