




SMARTWINGS

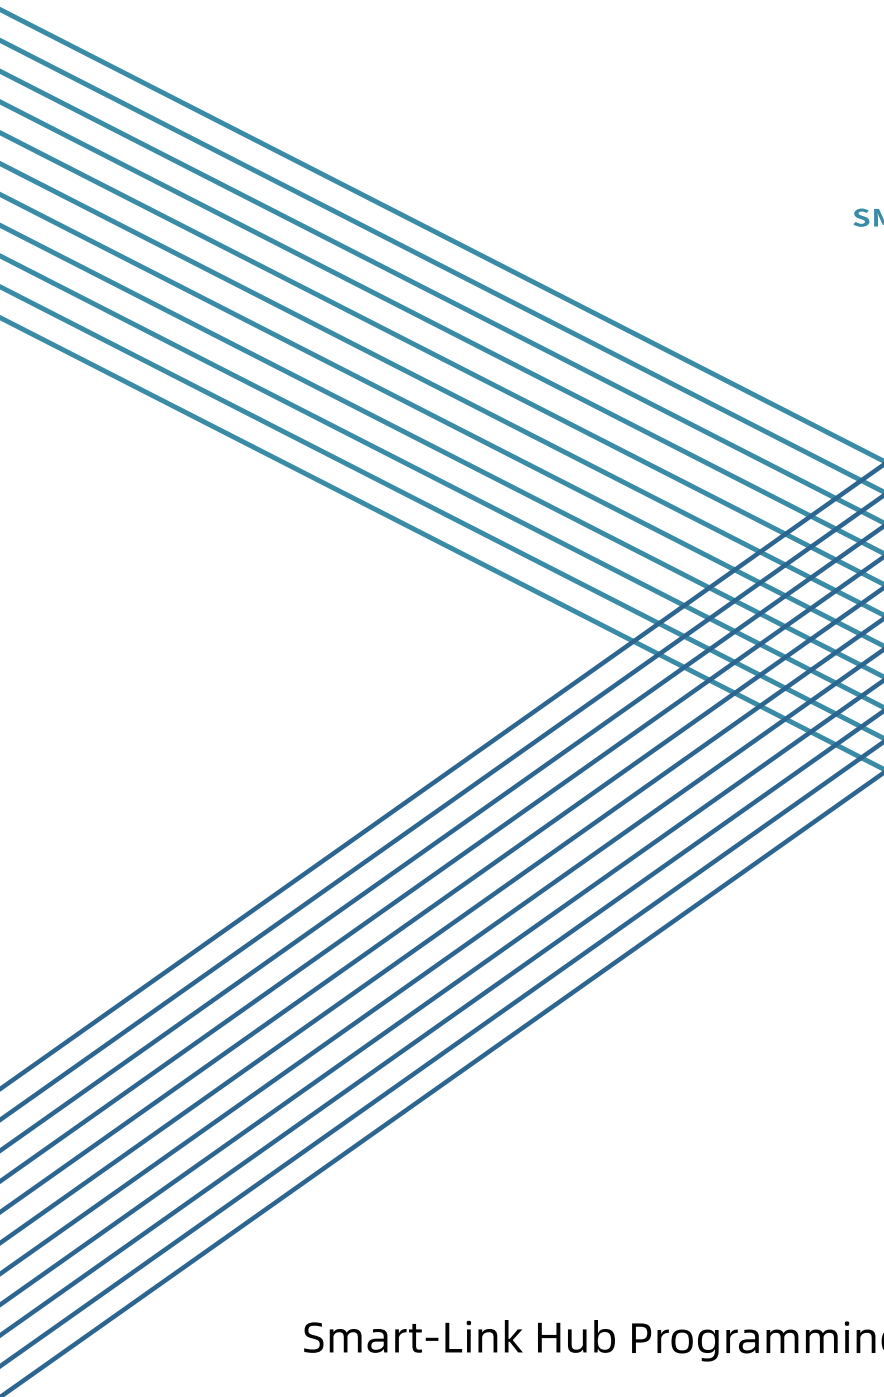

Smart-Link Hub Programming Guide

INS-C026

A-07 Oct 2023

Step 1:


Download 'Smart Life' App

Scan the QR Code using your phone to download the 'Smart Life' App, and then register an account.



Step 2:

Add Smart Link





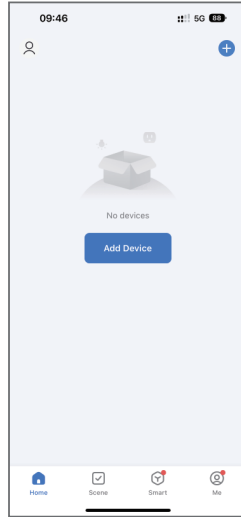


(Before all operations, please make sure your phone is connected to a 2.4GHz Wi-Fi network.)

Plug the smart link into a USB charging port, and wait for the green indicator to blink quickly.



Open the 'Smart Life' App, go to the homepage, and then click on 'Add Device' to open a new page.

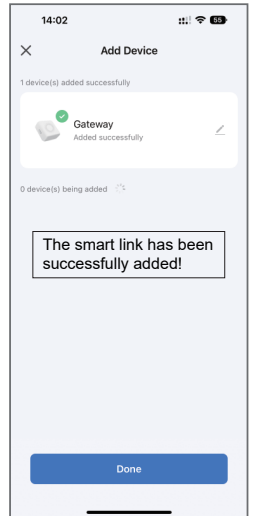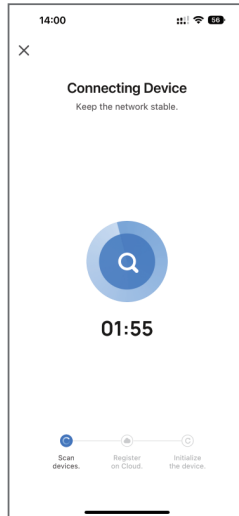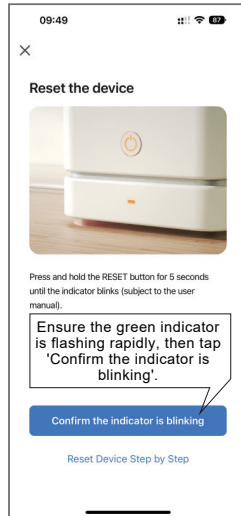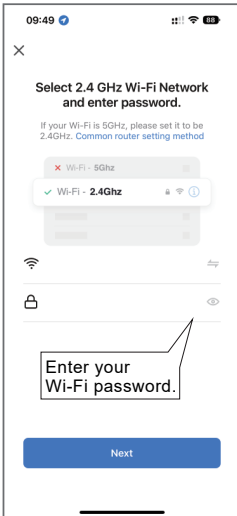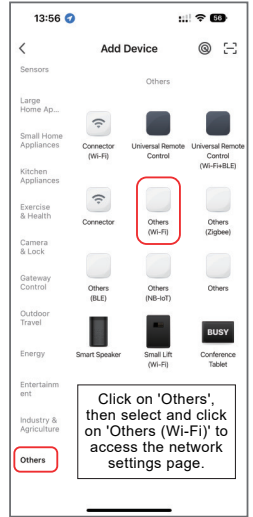






Step 3:

Add a Subdevice

There are two methods to pair the motor with the smart link.

Method One:

Press the 'P' button on the back of the remote twice to enter the pairing mode of the shade. (Each press will cause the motor to jog once.) Then, click 'Add subdevice' on the page.

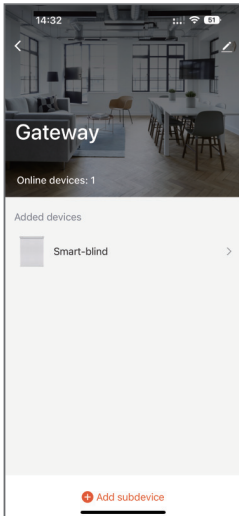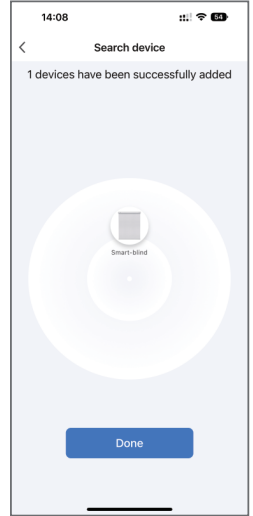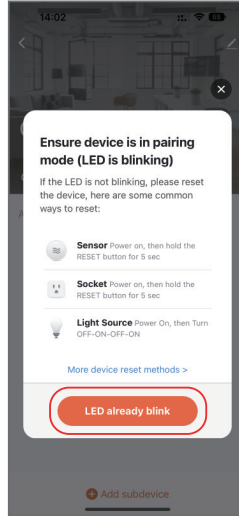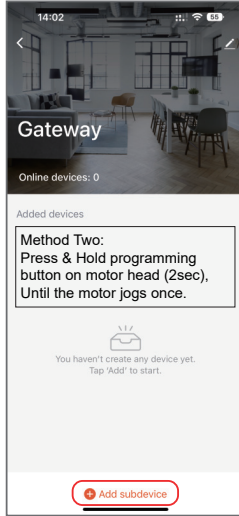

Gateway Parameters

Model:WG01
Power:5V 1000mA/5V 2000mA
Wireless Frequency:433.9MHz
Radio Frequency:2.4GHz
Pair up to 20 motors

Function Overview

1. Scene Control
2. Voice Control
3. Group Control
4. Timed



Resetting the Smart Link



1. Press and hold the reset button for 6 seconds until the indicator light turns red, then release the button.




2. Disconnect the power for approximately 10 seconds, then turn the power back on.



3. The quick blinking of the green indicator signifies that the smart link has been successfully reset.



SMARTWINGS

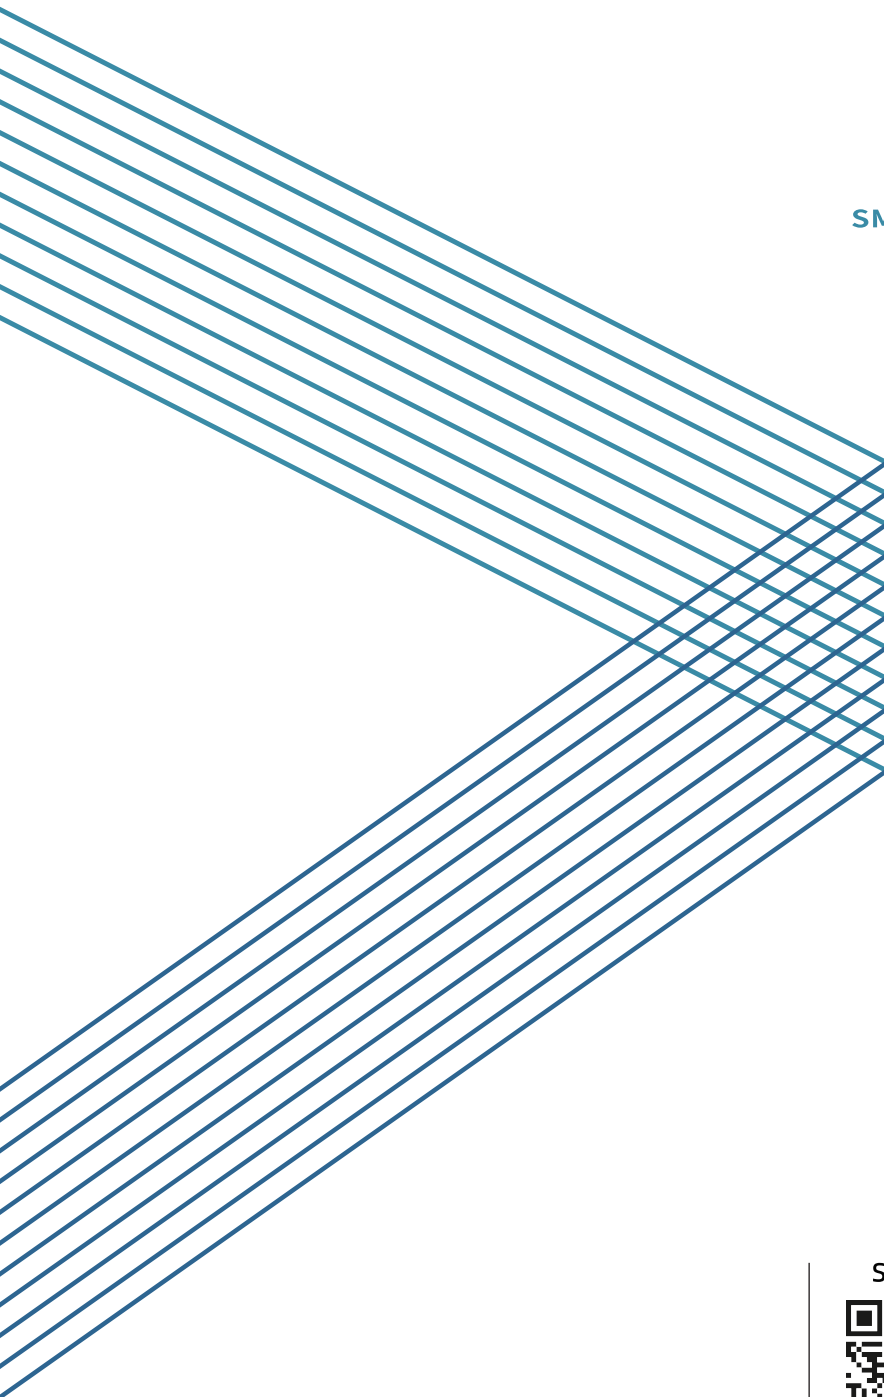

T +1 877 762 7861
www.smartwingshome.com
support@smartwingshome.com

Social Media

