



Gamma's 4.3-10 RF Weatherproofing Boots are one of the few cable protection solutions available that install faster than Cold Shrink and that's only because they come pre-installed on the cable. Simply slide the boots up the cable and over the connectors and you're done. Just like Cold Shrink, the Boots are IP68 rated when installed correctly making them a fantastic cable protection solution.

Gamma's 4.3-10 Weatherproof Boots are manufactured from a highly UV resistant silicone rubber that protects and seals connections. This boot provides IP68 performance and makes for the ideal weatherproof LTE connection solution. We offer mini DIN, standard, JMA compatible, and right angle 4.3-10 boots.

We recommend using RF Weatherproofing Boots in situations where you know you need to revisit the connection. If you know you need to go back to that connection in the near future to reset a radio/access point, (or something of that nature), you don't want to be cutting cold shrink, heat shrink, or tape off the connection with each visit. Weatherproofing Boots make it easy to disconnect your connection without having to change out your weather proofing.

5 for \$25

Try 5 Gamma Weatherproofing Products for \$25

Characteristics

- UV resistant silicone rubber
- Reusable and flexible enough for easy slide on and off
- Waterproof to IP68 standard
- Preinstallation required for LTE jumper cables
- Perfect for outdoor RF coaxial cable connection protection
- Protects connections from the elements
- Available in right angle
- JMA Compatible


Ordering Information

Part Number	Cable Connection	Width	Height	Depth	Connector Diameter	Cable Diameter
BT-4310-ST12-JMA	4.3-10 (Mini DIN) to 1/2" Standard Jumper Slide-on Boot	1.46"	3.73"	N/A	.63"	.51"
BT-4310-SFLEX	4.3-10 (Mini DIN) to 1/2" Superflex Jumper Slide-on Boot	1.42"	3.55"	N/A	.59"	.47"
BT-4310-COAX25	4.3-10 (Mini DIN) to 1/4" Coax	1.38"	3.15"	N/A	.57"	.24"
BT-RA-4310-SFLEX-JMA	Right Angle 4.3-10 to 1/2" Superflex Jumper Slide-on Boot	1.77"	3.55"	2.35"	.63"	.47"
BT-RA-4310-COAX25	Right Angle 4.3-10 to 1/4" Coax	Coming Soon	Coming Soon	Coming Soon	Coming Soon	Coming Soon


JMA Compatible Models: BT-4310-ST12-JMA and BT-RA-4310-SFLEX-JMA




BT-4310-ST12-JMA

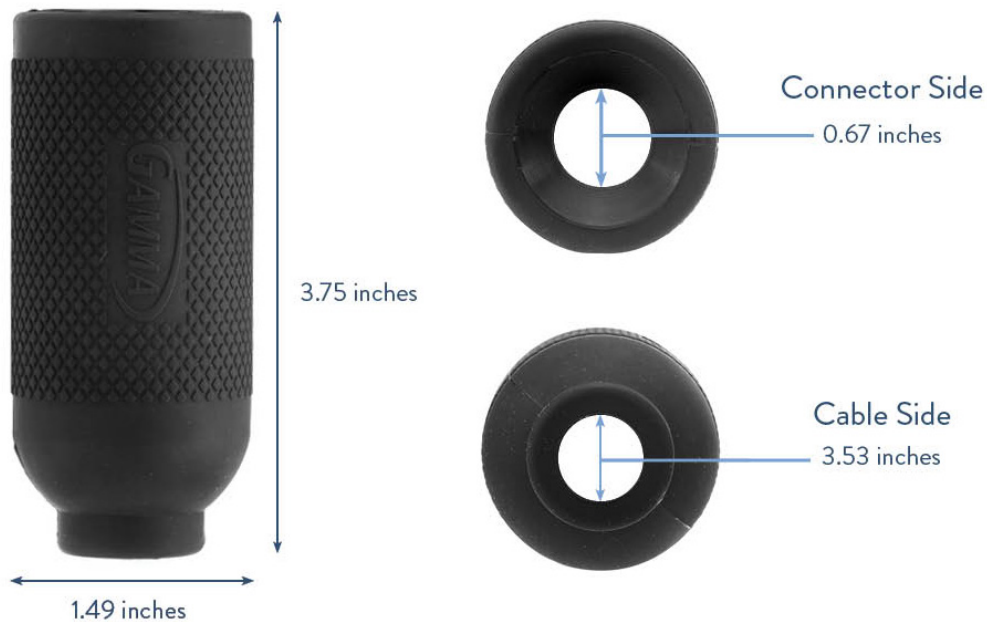

GAMMA BT-4310-SFLEX
ELECTRONICS

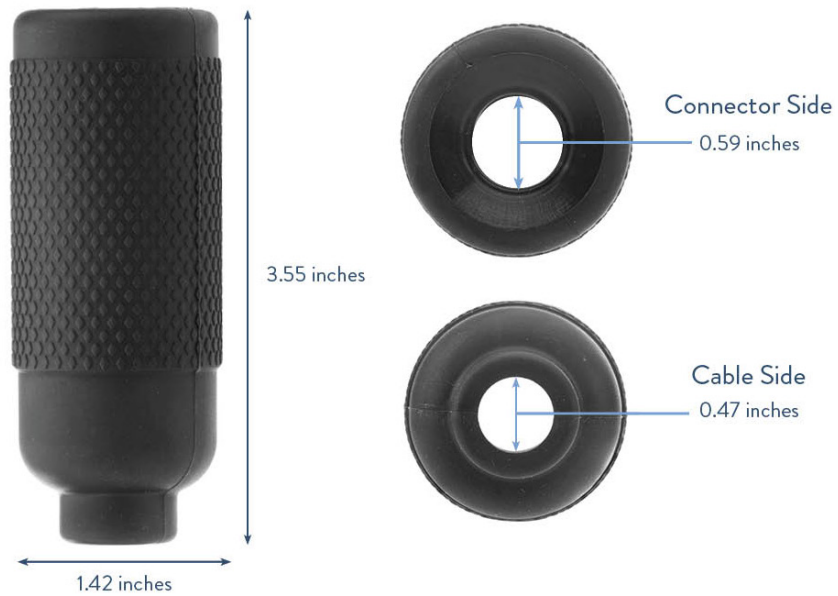

GAMMA BT-4310-COAX25
ELECTRONICS

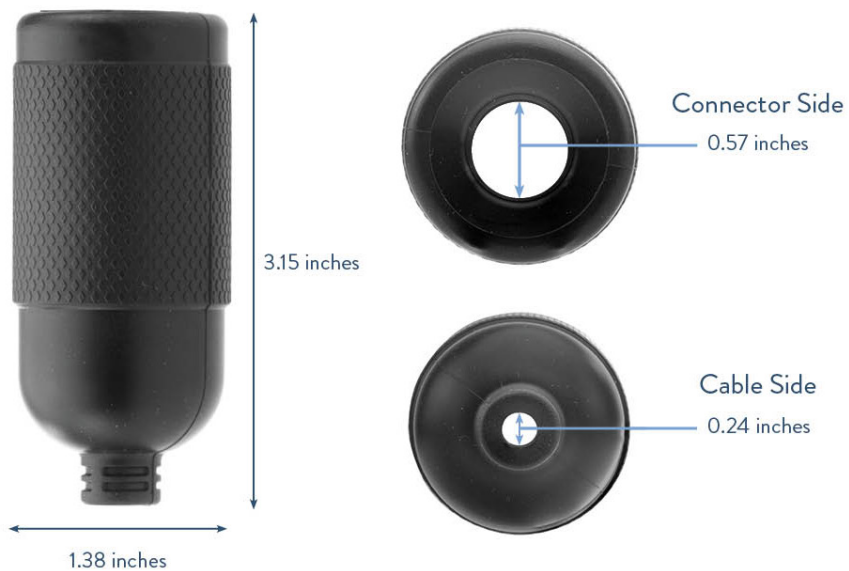

BT-RA-4310-SFLEX-JMA



BT-RA-4310-COAX-25



Property of Gamma Electronics Inc.

2818 Metropolitan Place, Suite A
Pomona, CA 91767
www.gammaelectronics.net