


KAIA

EMPYREAN


INSTALLATION MANUAL

EMPYREAN

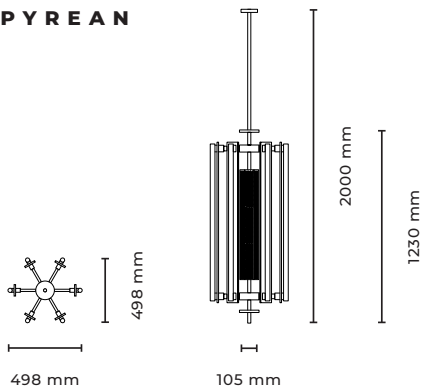

Type	Ceiling light
Material	Stainless Steel
Environment	Indoors
Dimension	2000 x 498 x 498 mm
Weight	48 kg
Certification	IP20 CE
EU/UK	230 V
Lamps	max 6x 120 W, S14s, our suggestion: 6x linear opal LED, 9,9W, 2700K, 1055 lm, Mains (Phase) dimmable, EPREL-ID: 566195

STEP 1 FRONT VIEW

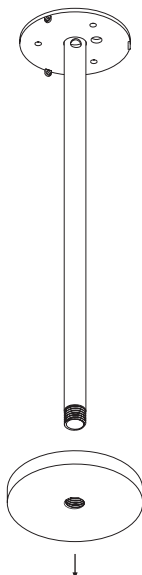


INSTALLATION


Before commencing installation ensure the relevant mains supply has been safely isolated/disconnected. Installation should be carried out by a qualified electrician. Ensure all electrical connections are tight with no loose strands, including factory made connections.

1. Unscrew the base plate of the rod and remove it.
2. Put the cover on the rod.
3. Screw the base plate back onto the rod.
4. Connect the luminaire to the rod and pull the cables through.
5. Pull the cables through the top hole of the rod.
6. Affix the rod to the ceiling with 3 screws (hole size max. 6 mm).
The cables must pass through the hole in the plate.
Connect the PE cable to the plate.
7. Connect the cables and place the cover over them.
8. Screw the cover to the ceiling plate.
9. Place the lamps in the units.


STEP 2 FRONT VIEW

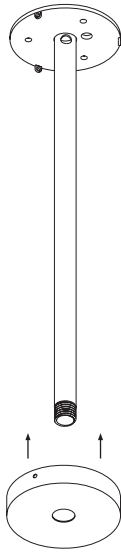


STEP 3 FRONT VIEW

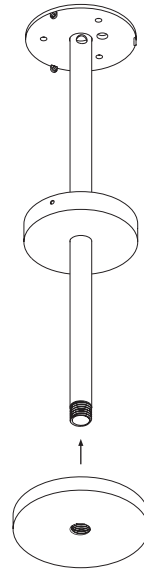


STEP 4 FRONT VIEW

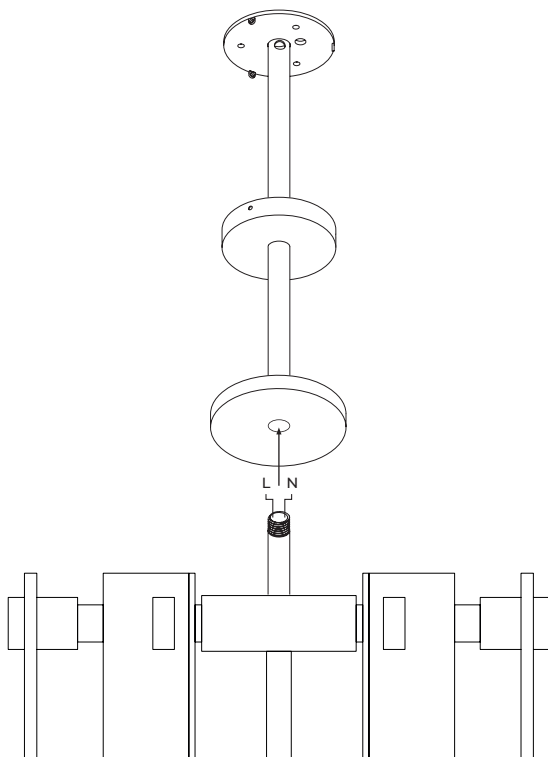


STEP 5 FRONT VIEW

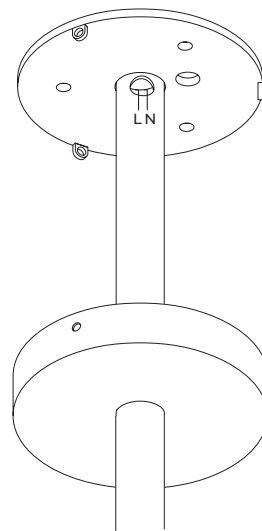


STEP 6 FRONT VIEW

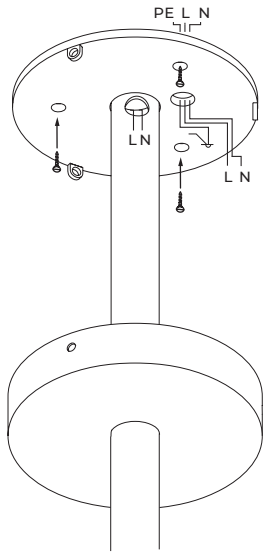


STEP 7 FRONT VIEW

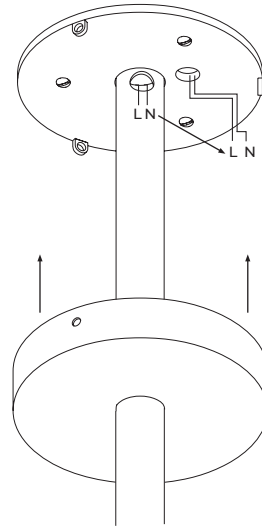

STEP 8 FRONT VIEW



STEP 9 SIDE VIEW

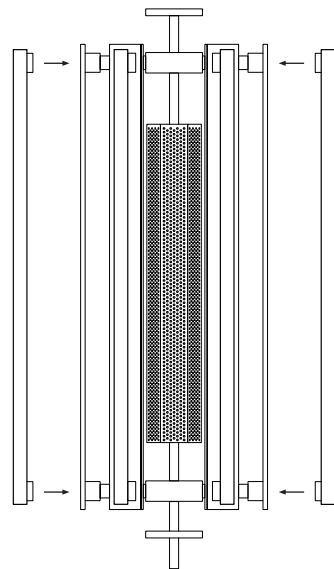

LAMP INSTALLATION

- Before commencing installation ensure the relevant mains supply has been switched off.
- Use supplied fabric gloves to prevent any stains on the surface of the lamp.
- Due to risk of glass fracture handle the lamp with care!
- Whilst applying pressure push the socket into the lamp holder in the marked place. Remove the lamp from the lamp holder carefully with both hands.

CARE INSTRUCTIONS

* On very rare occasions, these lamps may appear to have a slight buzzing or flickering. As is the case with all retro LED lamps, this is likely caused by a number of outside influences such as incorrect installation, wiring, dimming or transformers and in some instances low electrical resistance.

** Please contact sales@kaialighting.com for further information on dimmers etc. Please note KAIA Ltd cannot take any responsibility for the connection with your dimming or central control system. It is the customer's responsibility to ensure the compatibility with their systems.