


KAIA

LIA


INSTALLATION MANUAL

LIA
Suspension
100

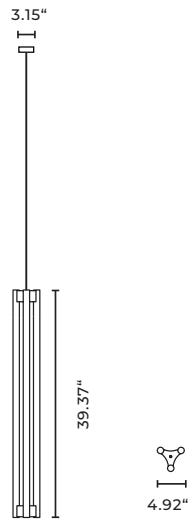


Type Suspension light
Material Brass
Environment Indoors
Dimension 39.37 x 4.92"
Cable Length Standard mounting 59.06"
Weight 4.63 lb
Certification IP20 CE; ETL US/CSA Canada
US 110V
Ceiling Rose Ø 3.15 x 0.98"; flat Ø 3.94"
Lamps 3x Linear opal LED S14s*,13W, 2700K, 1150 lm, Mains (Phase) dimmable

LIA
Suspension
50

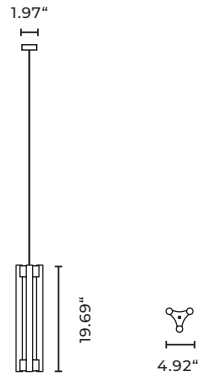


Type Suspension light
Material Brass
Environment Indoors
Dimension 19.69 x 4.92"
Cable Length Standard mounting 59.06"
Weight 4.19 lb
Certification IP20 CE; ETL US/CSA Canada
US 110V
Ceiling Rose Ø 3.15 x 0.98"; flat Ø 3.94"
Lamps 3x Linear opal LED S14s*,7W, 2700K, 610 lm, Mains (Phase) dimmable

LIA
Suspension
30




Type Suspension light
Material Brass
Environment Indoors
Dimensions 11.81 x 4.92"
Cable Length Standard mounting 59.06"
Weight 3.97 lb
Certification IP20 CE; ETL US/CSA Canada
US 110V
Lamps Ø 3.15 x 0.98"; flat Ø 3.94"
Glass lamps not available.
Please inquire.

STEP 2 TOP VIEW

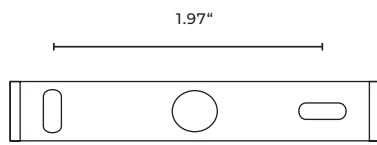


Hole size max. 1.77"

STEP 3 SIDE VIEW



STEP 4 SIDE VIEW

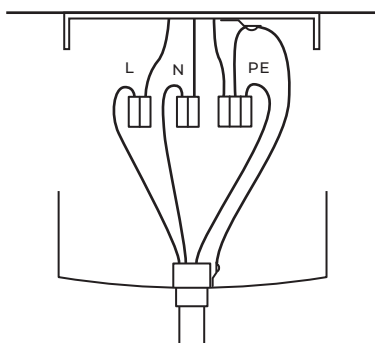


INSTALLATION


Before commencing installation ensure the relevant mains supply has been safely isolated/disconnected. Installation should be carried out by a qualified electrician. Ensure all electrical connections are tight with no loose strands, including factory made connections.

1. Fit the 3 lamps before starting the installation (see next page).
2. Remove the base from the installation bracket.
3. Affix the bracket to the ceiling with 2 screws (hole size max. 0.18", 1.97" apart).
4. Connect the unit to the mains.
5. Fix the unit back on its base and retighten 2 screws on the side.

STEP 5 SIDE VIEW

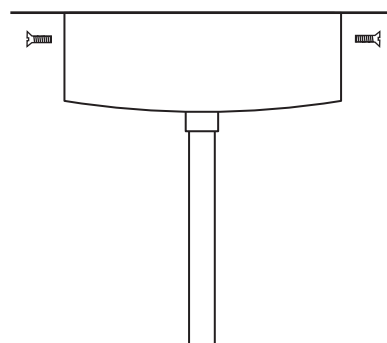

STEP 1 SIDE VIEW

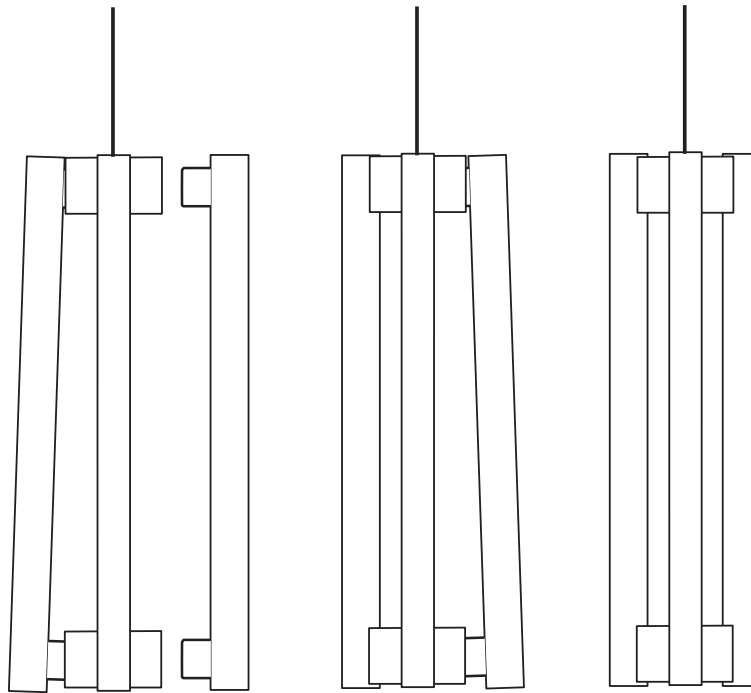

LAMP INSTALLATION

- Before commencing installation ensure the relevant mains supply has been switched off.
- Use supplied fabric gloves to prevent any stains on the surface of the lamp.
- Due to risk of glass fracture handle the lamp with care!
- Whilst applying pressure push the socket into the lamp holder in the marked place. Remove the lamp from the lamp holder carefully with both hands.

CARE INSTRUCTIONS

* On very rare occasions, these lamps may appear to have a slight buzzing or flickering. As is the case with all retro LED lamps, this is likely caused by a number of outside influences such as incorrect installation, wiring, dimming or transformers and in some instances low electrical resistance.

** Please contact sales@kaialighting.com for further information on dimmers etc. Please note KAIA Ltd cannot take any responsibility for the connection with your dimming or central control system. It is the customer's responsibility to ensure the compatibility with their systems.