


KAIA

MEL

INSTALLATION MANUAL

MEL

Wall 50

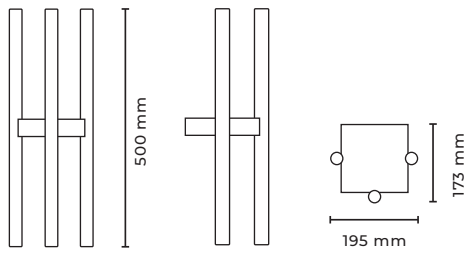

Type

Material

Environment

Dimensions

Weight

Certification

EU/UK

Lamps

Wall light

Brass

Indoors. Zone 3

500 x 195 x 173 mm

1.8 kg

IP20 CE

230 V

4,9 W, S14d,

max. 60 W, S14d,

our suggestion:


4,9 W, 3x linear opal LED, 2700 K,

Mains (Phase) dimmable*

EPREL ID 566201, 522907

MEL

Wall 30

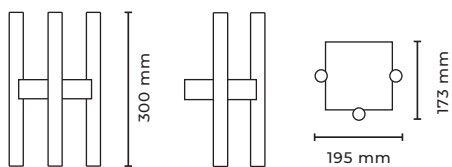

Type

Material

Environment

Dimensions

Weight

Certification

EU/UK

Lamps

Wall/ceiling light

Solid brass

Indoors

300 x 195 x 173 mm

1.8 kg

IP20 CE

230 V

max. 60 W, S14d,


our suggestion:

3,1 W, 3x linear opal LED, 2700 K,

Mains (Phase) dimmable*

EPREL ID 566201, 522905

STEP 1 FRONT VIEW

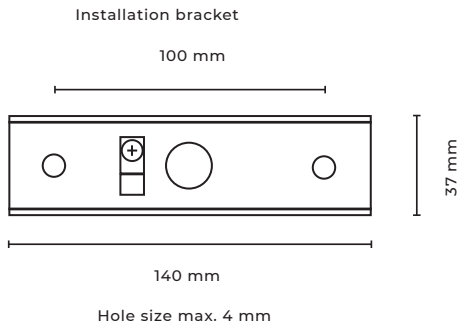


INSTALLATION


Before commencing installation ensure the relevant mains supply has been safely isolated/disconnected. Installation should be carried out by a qualified electrician. Ensure all electrical connections are tight with no loose strands, including factory made connections.

1. Remove the base from the installation bracket.
2. Affix the bracket to the ceiling/wall with 2 screws (hole size max. 4 mm). Distance between fixing holes: 100 mm.
3. Connect the unit to the mains.
4. Fix the unit back on its base and re-tighten 2 screws on the side.
5. Place the lamp in the luminiere.



STEP 2 TOP VIEW



STEP 3 SIDE VIEW

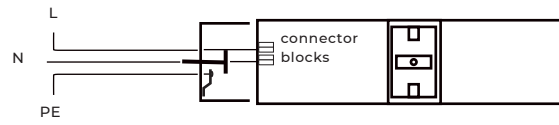


STEP 4 SIDE VIEW

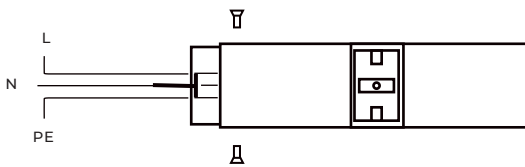

STEP 5

SIDE VIEW

FRONT VIEW

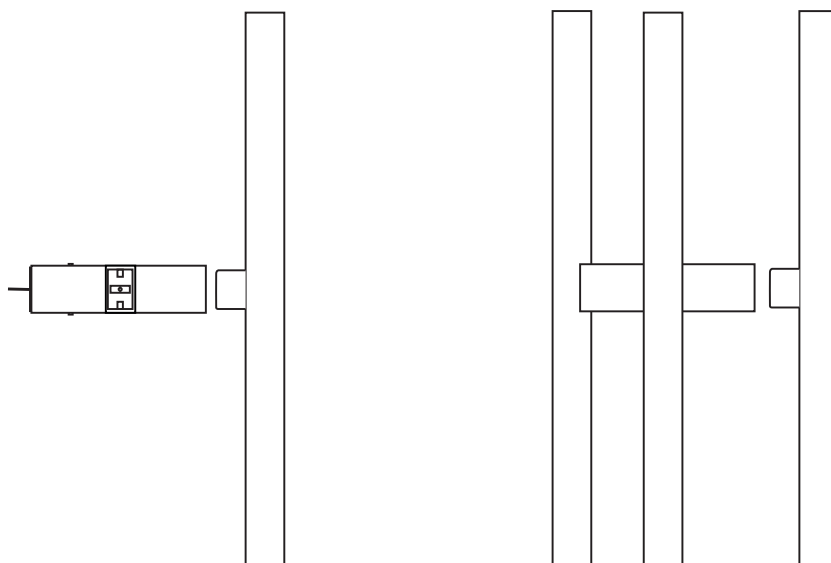

LAMP INSTALLATION

- Before commencing installation ensure the relevant mains supply has been switched off.
- Use supplied fabric gloves to prevent any stains on the surface of the lamp.
- Due to risk of glass fracture handle the lamp with care!
- Whilst applying pressure push the socket into the lamp holder in the marked place.
Remove the lamp from the lamp holder carefully with both hands.

CARE INSTRUCTIONS

* On very rare occasions, these lamps may appear to have a slight buzzing or flickering. As is the case with all retro LED lamps, this is likely caused by a number of outside influences such as incorrect installation, wiring, dimming or transformers and in some instances low electrical resistance.

** Please contact sales@kaialighting.com for further information on dimmers etc. Please note KAIA Ltd cannot take any responsibility for the connection with your dimming or central control system. It is the customer's responsibility to ensure the compatibility with their systems.