
doobs



Quick start guide Wireless stereo headset



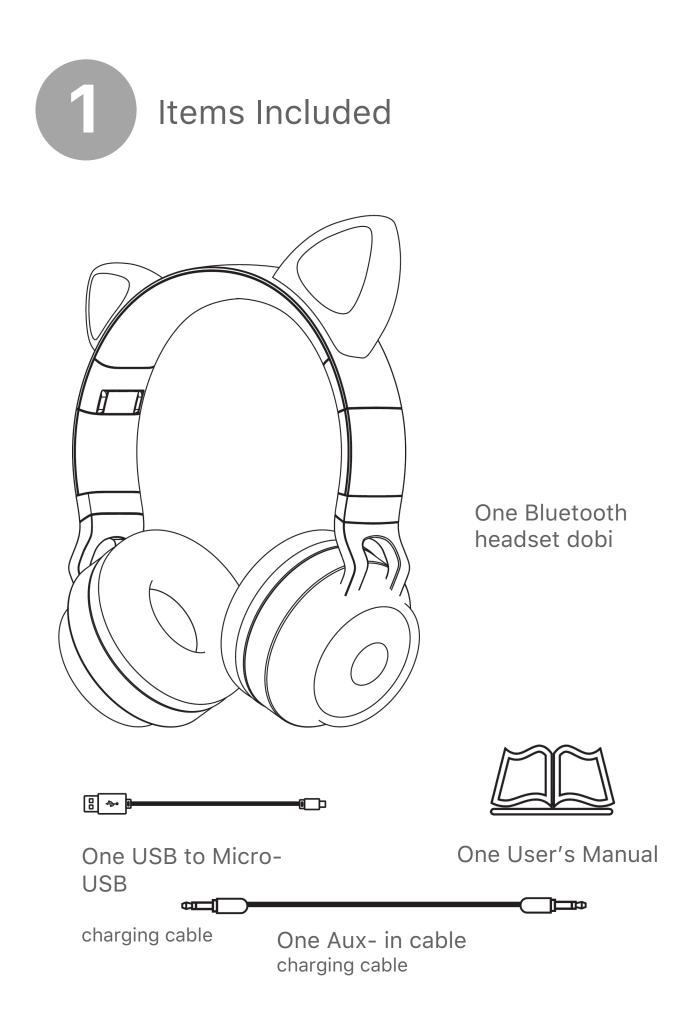

Button Description

" ()/)"	ON/ OFF, Play/ Pause, Answer Calls/ Hang off Calls.
" (H4/V-) "	Short press for reducing volume/ long press for previous song
" (H/V+) "	Short press for increasing volume / long press for next song
" M "	Switching Play Mode by Short Press FM/Long Press Switch LED Lamp



Bluetooth Mode

1. Startup:

Long press '" ("/M/)"' for more than 3 seconds, the headset will start up and enter into Bluetooth mode automatically, voice prompts " Power on "

2. Pairing Operation:

a. For the first-time pairing: start up the Bluetooth headset, voice prompt " Power on " will be heard, and then enter into Bluetooth mode automatically voice prompt " Bluetooth mode" and LED indicator light alternatively flashes with blue and green colors. Please open the smart device's Bluetooth searching function and select the device"doobs dobi", no password is required (If the device require a password, please enter "0000"), after successful pairing, voice prompt " Connected" will be heard, LED indicator light turns to blue. b. Re-pairing: Turn off the attached smart device's Bluetooth function, voice prompt "Disconnected" will be heard, LED indicator light alternating flashes with blue and green colors. Open another smart device's Bluetooth searching function and select the device "doobs dobi ", no password is required (If some devices require password, please enter "0000"), after successful pairing, a tone will be heard, LED indicator light turns to blue.

c. Follow-up pairing: automatically search and pair the last connected device in 3 seconds after power on.


d. Button Operation:

- 1) Answer calls: Short press '" () when calls' coming.
- 2) Hang off phone calls: Short press '" $\textcircled{}^{"}$ when calling.
- 3) Reject phone calls: Long press " () for 2 seconds when calls' coming.
- 4) Redial the last number: Double-click '" ()/)"/)"
- 5) Music Play. Short press '" ()/)"' to play/pause the music when the player is on.
- 6) Volume control: short press '" (♥/V→ "' to reduce volume (minimum volume tone "dudu"), short press "" (♥/V+) "" to increase volume (maximum volume tone "dudu")
- 7) Previous/Next control: long press "" ("/V-)" for previous song; long press "" ("/V+)" for next song.
- 3. Shutdown:

Long press '" () '' for more than 3 seconds when the headset is on, voice prompts "Power off", LED indicator light turns off.



1)! When the slot is empty and then insert the TF Card, voice prompts "TF Mode. It plays media automatically.

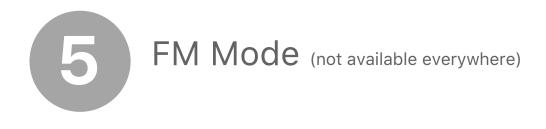

1) When the headset is on, switch to FM mode with " M ", voice prompt " Radio Mode", Enter FM mode, green light.

2) Search Radio: Click '" ())"' Automatically search and save the desk, LED green light flickers fast, (long press to stop searching again halfway), and then enter FM mode again.


Automatically enter the first station that has been saved and the green light is on. Long press "" $(lashef{W}/V-)$ "" perhaps "" $(lashef{W}/V+)$ "" You can switch channels. If you want to search the station again, click again in FM mode '" $(lashef{W}/\mathbb{N})$ "



When the headset is on and insert the Aux-in cable, the Bluetooth function will turn off and switch to Aux-in playing.



- 1. Low battery voice prompt: "Please Charge It"
- 2. When the headset is low battery, please use the charging cable to charge and make sure the charging voltage is 5V/1A
- 3. Power saving mode: if no successful match for 5 minutes, the headset will automatically shut down.



Charge Status	LED indicator light stays red. When fully charged, Blue LED Indicator Lighting
Pairing Status	LED indicator light rapidly alternating flashes with blue and green colors.
Connected Status	LED indicator light stays blue.
Using Status	Bluetooth Mode, LED indicator light flashes blue
	TF Mode, LED indicator flashes green
	Radio Mode, the green light is always on
	Aux-in Mode, the headset automatically turns off, LED light turns off.



If no pairing connection after the Bluetooth headset enters the pairing mode, please turn off the headset to save power.

Do not perform other operations when searching for Bluetooth to prevent the program error.

Please select a proper volume while using to prevent damage to your ears.

Please note that a good environment for using the Bluetooth headsets can avoid damage to the headsets.

Please charge the headset after a long time none-use.

Product Parameters

Bluetooth Version: V 5.0 Support Profile: Support a2dp\avctp\avdtp\avrcp\hfp\spp\smp\att\gap\ga tt\rfcomm\sdp\l2cap profile Working Distance Range: 10m Battery Specifications: 3.7V 400mAh, Built-in rechargeable Lithium-ion battery Charging Voltage: 5V/IA Charging Time: about 2.5 hours Talking/Music time: LED lights turn on for about 7 hours/turn off for about 12 hours Working Frequency: 2.402-2.480GHz Impedance: 32Q Sensitivity: 85±3db Chipset :JL6925



• Always follow all instructions and warnings closely.

• Do not place in the vicinity of open fire, such as candles etc.

- Attention should be drawn to the environmental aspects of battery disposal.
- The battery shall not be exposed to excessive heat such as sunshine, fire or the like.
- CAUTION: Battery can not be changed .

If no pairing connection after the Bluetooth headset enters the pairing mode, please turn off the headset to save power.

Do not perform other operations when searching for Bluetooth to prevent the program error.

Please select a proper volume while using to prevent damage to your ears.

long use at high volume can cause hearing damage.

Please note that a good environment for using the Bluetooth headsets can avoid damage to the headsets.

Please charge the headset after a long time none-use.

Do not use in traffic .