

5. Navigate to the 'Settings' tab in the middle of the screen.
6. Select 'WiFi Extender' on the left and then select 'WiFi Extender' again from the sub menu.

7. A list of available networks will appear but if you cannot see the network you are looking for, try pressing the 'Scan' button.

8. When you have found the network you would like to connect to, click on the network name and type in the network password (if required). Once you have typed in the password, click the 'Connect' button.

9. Wait a moment for the 4G Kuma WiFi mini router to connect to the network you have chosen. When 'Connected' on the webpage underneath the network name and on the front of the 4G Kuma WiFi mini router screen.

4G WiFi kit guide V4.0



5. Navigate to the 'Settings' tab in the middle of the screen.

6. Select 'WiFi Extender' on the left and then select 'WiFi Extender' again from the sub menu.

7. A list of available networks will appear but if you cannot see the network you are looking for, try pressing the 'Scan' button.

8. When you have found the network you would like to connect to, click on the network name and type in the network password (if required). Once you have typed in the password, click the 'Connect' button.

9. Wait a moment for the 4G Kuma WiFi mini router to connect to the network you have chosen. When connected you should see 'Connected' on the webpage underneath the network name and on the front of the 4G Kuma WiFi mini router screen.

4G WiFi kit guide V4.0




## Easy Set Up Guide


4G WiFi Kit

Contents - Please check you have the following in your kit:

- 4G Kuma WiFi Mini Router
- Battery
- Sim Card Adapter
- USB Charge Cable
- 4G Kuma WiFi Antenna
- Kuma Quick Start Guide



Screen Display



- 1 Power button
- 2 Screen
- 3 Antenna inputs
- 4 Micro USB port
- 5 MENU button
- 1 Traffic statistics
- 2 Signal strength
- 3 Network type
- 4 Data connection status
- 5 WiFi
- 6 Battery




## Easy Set Up Guide

4G WiFi Kit

Contents - Please check you have the following in your kit:

- 4G Kuma WiFi Mini Router
- Battery
- Sim Card Adapter
- USB Charge Cable
- 4G Kuma WiFi Antenna
- Kuma Quick Start Guide



Screen Display



- 1 Power button
- 2 Screen
- 3 Antenna inputs
- 4 Micro USB port
- 5 MENU button
- 1 Traffic statistics
- 2 Signal strength
- 3 Network type
- 4 Data connection status
- 5 WiFi
- 6 Battery

## Easy Set Up Guide


4G WiFi Kit

Contents - Please check you have the following in your kit:

- 4G Kuma WiFi Mini Router
- Battery
- Sim Card Adapter
- USB Charge Cable
- 4G Kuma WiFi Antenna
- Kuma Quick Start Guide



Screen Display



- 1 Power button
- 2 Screen
- 3 Antenna inputs
- 4 Micro USB port
- 5 MENU button
- 1 Traffic statistics
- 2 Signal strength
- 3 Network type
- 4 Data connection status
- 5 WiFi
- 6 Battery

## Easy Set Up Guide


4G WiFi Kit

Contents - Please check you have the following in your kit:

- 4G Kuma WiFi Mini Router
- Battery
- Sim Card Adapter
- USB Charge Cable
- 4G Kuma WiFi Antenna
- Kuma Quick Start Guide




Screen Display



- 1 Power button
- 2 Screen
- 3 Antenna inputs
- 4 Micro USB port
- 5 MENU button
- 1 Traffic statistics
- 2 Signal strength
- 3 Network type
- 4 Data connection status
- 5 WiFi
- 6 Battery

4G WiFi kit guide V4.0

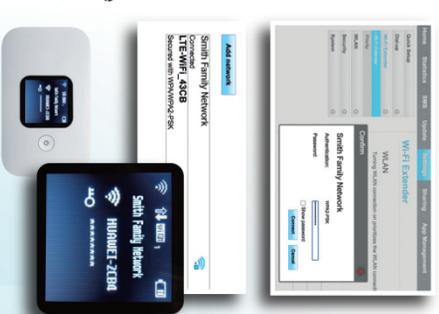



### Section A Set up as a 4G Hotspot

1. Open the back of the 4G Kuma WiFi mini router by removing the back cover using the aperture on the corner of the device and remove the battery.
2. Insert the SIM card you wish to use (not provided) into the SIM card slot. An adapter is included if you have a Nano SIM card.
3. Replace the battery and the rear cover of the mini router. The cover will only fit on one way.
4. Open the small cover on the bottom of the device and plug in both white plugs of the 4G Kuma WiFi antenna. The plugs are a tight fit. Ensure the plugs are straight when inserting and push firmly.
5. Power on the router by pressing the power button on the front for 2 seconds.
6. When the router has started your SIM card carrier will be displayed in the main screen. Press MENU button on top twice to access DEVICE INFO – here is your SSID and WiFi password.
7. To connect your device (laptop, tablet, iPad, or smartphone), go to WiFi on the device and find your Kuma mini router name in the list, then enter the password displayed on the mini router screen below the name.
8. In the top left on the screen will be the signal bar indicating how strong your connection to the carrier is. If you are struggling to pick up a signal, try moving the 4G antenna to a different position.
9. You may find that the 4G signal is stronger at a lower level. You should now be connected to the internet which will be indicated on the screen (See 4 on the diagram opposite).
10. Please download the Huawei HiLink App for full device control. The kit will work with 2G, 3G and 4G signals, however due to the design of the Kuma antenna maximum boost is obtained on 4G signals.

### Section B Set up as a WiFi Extender

1. Make sure the 4G Kuma WiFi mini router is on, then press the menu button (on the top of the device) 8 times.
2. Press the power button to turn on the 'WiFi Extender' option. You should see a loading wheel and after a few seconds, this will return to the menu screen. Your 4G Kuma WiFi mini router is now ready to be configured.
3. Connect your device to the 4G Kuma WiFi mini router (see section A), open your internet browser and type into the address bar: '192.168.8.1' and press 'Enter' or 'Go'. A login screen will appear and the default login details are  
**Username: admin**  
**Password: admin**
4. There are 3 quick setup steps you need to go through before you can connect to your preferred network.
  - Under 'Update Configuration', click the auto-download button and then the Next button.
  - In the next screen, 'Configure WLAN settings', you can change both the WiFi name on the Kuma kit and password if you wish (you can also change this later on) or alternatively, click the Next button.
  - Finally, you will be asked to change the administrator password of the Kuma WiFi mini router (this is NOT the WiFi password). Type in the original administrator password (admin) and then input a new password.



**Continued overleaf**

**NOTE:**  
If the WiFi extender option has been enabled correctly, you will see this icon highlighted in green.



### Section A Set up as a 4G Hotspot

1. Open the back of the 4G Kuma WiFi mini router by removing the back cover using the aperture on the corner of the device and remove the battery.
2. Insert the SIM card you wish to use (not provided) into the SIM card slot. An adapter is included if you have a Nano SIM card.
3. Replace the battery and the rear cover of the mini router. The cover will only fit on one way.
4. Open the small cover on the bottom of the device and plug in both white plugs of the 4G Kuma WiFi antenna. The plugs are a tight fit. Ensure the plugs are straight when inserting and push firmly.
5. Power on the router by pressing the power button on the front for 2 seconds.
6. When the router has started your SIM card carrier will be displayed in the main screen. Press MENU button on top twice to access DEVICE INFO – here is your SSID and WiFi password.
7. To connect your device (laptop, tablet, iPad, or smartphone), go to WiFi on the device and find your Kuma mini router name in the list, then enter the password displayed on the mini router screen below the name.
8. In the top left on the screen will be the signal bar indicating how strong your connection to the carrier is. If you are struggling to pick up a signal, try moving the 4G antenna to a different position.
9. You may find that the 4G signal is stronger at a lower level. You should now be connected to the internet which will be indicated on the screen (See 4 on the diagram opposite).
10. Please download the Huawei HiLink App for full device control. The kit will work with 2G, 3G and 4G signals, however due to the design of the Kuma antenna maximum boost is obtained on 4G signals.

### Section B Set up as a WiFi Extender

1. Make sure the 4G Kuma WiFi mini router is on, then press the menu button (on the top of the device) 8 times.
2. Press the power button to turn on the 'WiFi Extender' option. You should see a loading wheel and after a few seconds, this will return to the menu screen. Your 4G Kuma WiFi mini router is now ready to be configured.
3. Connect your device to the 4G Kuma WiFi mini router (see section A), open your internet browser and type into the address bar: '192.168.8.1' and press 'Enter' or 'Go'. A login screen will appear and the default login details are  
**Username: admin**  
**Password: admin**
4. There are 3 quick setup steps you need to go through before you can connect to your preferred network.
  - Under 'Update Configuration', click the auto-download button and then the Next button.
  - In the next screen, 'Configure WLAN settings', you can change both the WiFi name on the Kuma kit and password if you wish (you can also change this later on) or alternatively, click the Next button.
  - Finally, you will be asked to change the administrator password of the Kuma WiFi mini router (this is NOT the WiFi password). Type in the original administrator password (admin) and then input a new password.



**Continued overleaf**

**NOTE:**  
If the WiFi extender option has been enabled correctly, you will see this icon highlighted in green.



### Section A Set up as a 4G Hotspot

1. Open the back of the 4G Kuma WiFi mini router by removing the back cover using the aperture on the corner of the device and remove the battery.
2. Insert the SIM card you wish to use (not provided) into the SIM card slot. An adapter is included if you have a Nano SIM card.
3. Replace the battery and the rear cover of the mini router. The cover will only fit on one way.
4. Open the small cover on the bottom of the device and plug in both white plugs of the 4G Kuma WiFi antenna. The plugs are a tight fit. Ensure the plugs are straight when inserting and push firmly.
5. Power on the router by pressing the power button on the front for 2 seconds.
6. When the router has started your SIM card carrier will be displayed in the main screen. Press MENU button on top twice to access DEVICE INFO – here is your SSID and WiFi password.
7. To connect your device (laptop, tablet, iPad, or smartphone), go to WiFi on the device and find your Kuma mini router name in the list, then enter the password displayed on the mini router screen below the name.
8. In the top left on the screen will be the signal bar indicating how strong your connection to the carrier is. If you are struggling to pick up a signal, try moving the 4G antenna to a different position.
9. You may find that the 4G signal is stronger at a lower level. You should now be connected to the internet which will be indicated on the screen (See 4 on the diagram opposite).
10. Please download the Huawei HiLink App for full device control. The kit will work with 2G, 3G and 4G signals, however due to the design of the Kuma antenna maximum boost is obtained on 4G signals.

### Section B Set up as a WiFi Extender

1. Make sure the 4G Kuma WiFi mini router is on, then press the menu button (on the top of the device) 8 times.
2. Press the power button to turn on the 'WiFi Extender' option. You should see a loading wheel and after a few seconds, this will return to the menu screen. Your 4G Kuma WiFi mini router is now ready to be configured.
3. Connect your device to the 4G Kuma WiFi mini router (see section A), open your internet browser and type into the address bar: '192.168.8.1' and press 'Enter' or 'Go'. A login screen will appear and the default login details are  
**Username: admin**  
**Password: admin**
4. There are 3 quick setup steps you need to go through before you can connect to your preferred network.
  - Under 'Update Configuration', click the auto-download button and then the Next button.
  - In the next screen, 'Configure WLAN settings', you can change both the WiFi name on the Kuma kit and password if you wish (you can also change this later on) or alternatively, click the Next button.
  - Finally, you will be asked to change the administrator password of the Kuma WiFi mini router (this is NOT the WiFi password). Type in the original administrator password (admin) and then input a new password.



**Continued overleaf**

**NOTE:**  
If the WiFi extender option has been enabled correctly, you will see this icon highlighted in green.



### Section A Set up as a 4G Hotspot

1. Open the back of the 4G Kuma WiFi mini router by removing the back cover using the aperture on the corner of the device and remove the battery.
2. Insert the SIM card you wish to use (not provided) into the SIM card slot. An adapter is included if you have a Nano SIM card.
3. Replace the battery and the rear cover of the mini router. The cover will only fit on one way.
4. Open the small cover on the bottom of the device and plug in both white plugs of the 4G Kuma WiFi antenna. The plugs are a tight fit. Ensure the plugs are straight when inserting and push firmly.
5. Power on the router by pressing the power button on the front for 2 seconds.
6. When the router has started your SIM card carrier will be displayed in the main screen. Press MENU button on top twice to access DEVICE INFO – here is your SSID and WiFi password.
7. To connect your device (laptop, tablet, iPad, or smartphone), go to WiFi on the device and find your Kuma mini router name in the list, then enter the password displayed on the mini router screen below the name.
8. In the top left on the screen will be the signal bar indicating how strong your connection to the carrier is. If you are struggling to pick up a signal, try moving the 4G antenna to a different position.
9. You may find that the 4G signal is stronger at a lower level. You should now be connected to the internet which will be indicated on the screen (See 4 on the diagram opposite).
10. Please download the Huawei HiLink App for full device control. The kit will work with 2G, 3G and 4G signals, however due to the design of the Kuma antenna maximum boost is obtained on 4G signals.

### Section B Set up as a WiFi Extender

1. Make sure the 4G Kuma WiFi mini router is on, then press the menu button (on the top of the device) 8 times.
2. Press the power button to turn on the 'WiFi Extender' option. You should see a loading wheel and after a few seconds, this will return to the menu screen. Your 4G Kuma WiFi mini router is now ready to be configured.
3. Connect your device to the 4G Kuma WiFi mini router (see section A), open your internet browser and type into the address bar: '192.168.8.1' and press 'Enter' or 'Go'. A login screen will appear and the default login details are  
**Username: admin**  
**Password: admin**
4. There are 3 quick setup steps you need to go through before you can connect to your preferred network.
  - Under 'Update Configuration', click the auto-download button and then the Next button.
  - In the next screen, 'Configure WLAN settings', you can change both the WiFi name on the Kuma kit and password if you wish (you can also change this later on) or alternatively, click the Next button.
  - Finally, you will be asked to change the administrator password of the Kuma WiFi mini router (this is NOT the WiFi password). Type in the original administrator password (admin) and then input a new password.



**Continued overleaf**

**NOTE:**  
If the WiFi extender option has been enabled correctly, you will see this icon highlighted in green.