

# Nuance I Light Pendant

**KCI023** 1.0

GENERATION LIGHTING

## Chandelier

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

**CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**Use minimum 90°C supply conductors.**

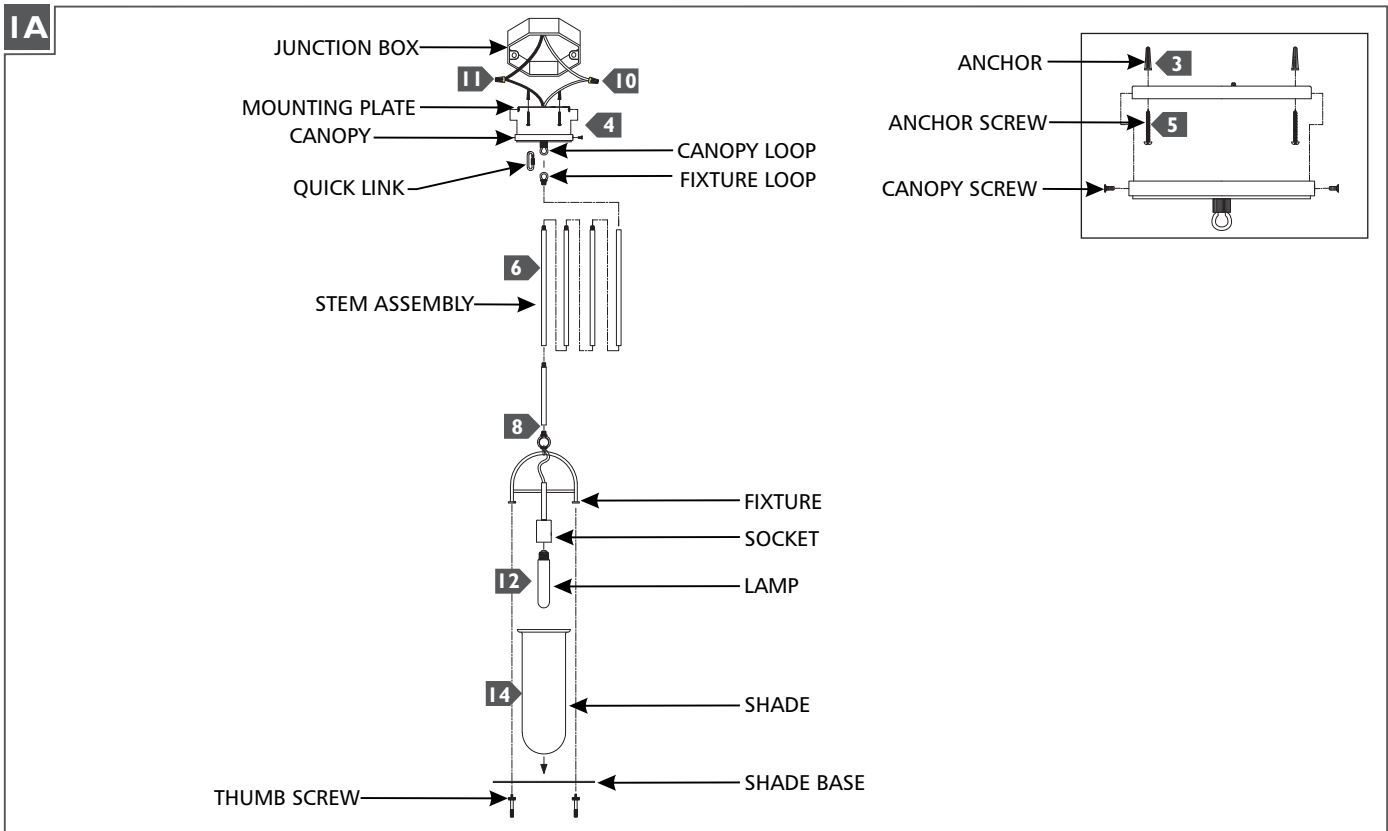

- 1** Temporarily install the mounting plate to the junction box.
- 2** Mark the anchor hole locations through the mounting plate, then remove the mounting plate.
- 3** Drill appropriate sized holes and install the anchors.
- 4** Secure the mounting plate to the junction box.
- 5** Screw the anchor screws into the anchors.
- 6** Determine the wanted height or look of the fixture with the provided stems and fixture loop then assemble them by screwing them together.
- 7** Feed the fixture wires through the stem assembly and screw it onto the fixture.
- 8** Feed the fixture wired through the canopy. Install a quick link onto the fixture loop and canopy loop, use the fiberglass sleeve on the exposed wired if needed.
- 9** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 10** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 11** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 12** Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place with the provided canopy screws.
- 13** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage information. Repeat for each socket.
- 14** Gently place the shades into the shade bases and secure the shade bases to the fixture with the provided thumb screws. Repeat for each light.

**SAVE THESE INSTRUCTIONS!**

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

**[www.generationlighting.com](http://www.generationlighting.com)**

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.