tebaj van

GENERATION LIGHTING

WALL

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for wet locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


GENERATION LIGHTING


7400 Linder Ave, Skokie, IL 160077 800.969.3347

www.generationlighting.com


© 2020 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

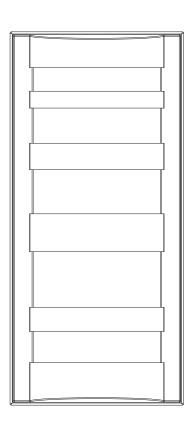

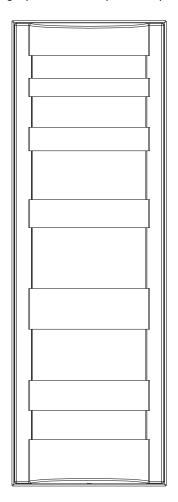

Install the Fixture

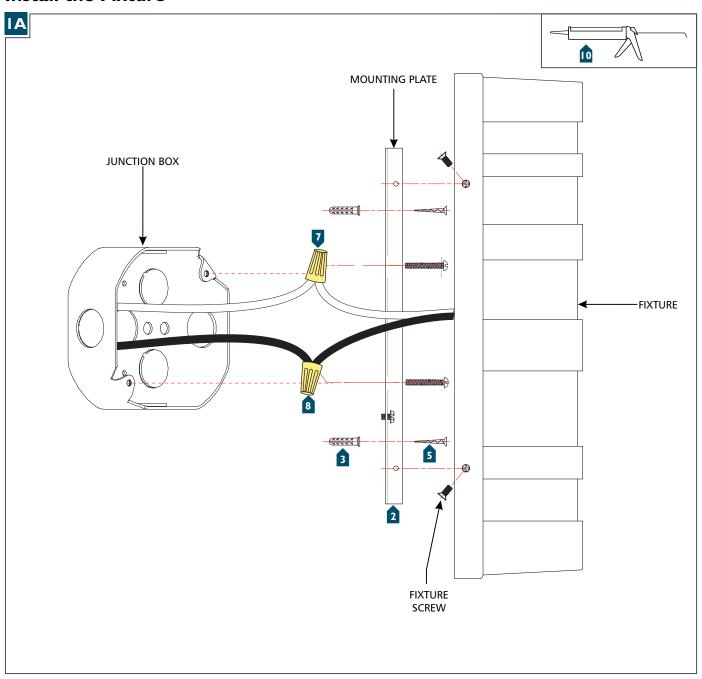

- Unscrew the four fixture screws and remove the mounting plate from the fixture.
- 2 Temporarily install the mounting plate to the junction box and mark the location of the anchors, then remove the mounting plate.
- Install the anchors at the marked locations.
- 4 Secure the mounting plate to the junction box.
- Screw the anchor screws into the anchors.
- 6 Connect the fixture to a suitable ground in accordance to local electrical codes.
- Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 8 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- Neatly place all the wires into the junction box, place the fixture onto the mounting plate, and secure it in place by screwing the fixture screws back into place
- For Wet Locations, caulk around the base of the fixture with waterproof construction sealant.