

Cortes Flush Mount

DJF1002 | 1.0

VISUAL COMFORT & Co.

STUDIO COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

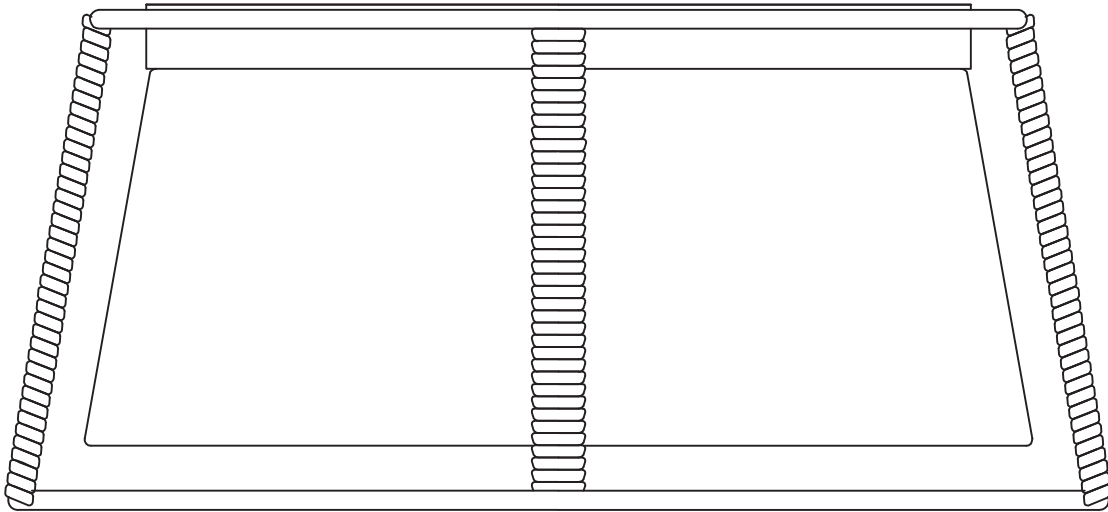

Install the Fixture

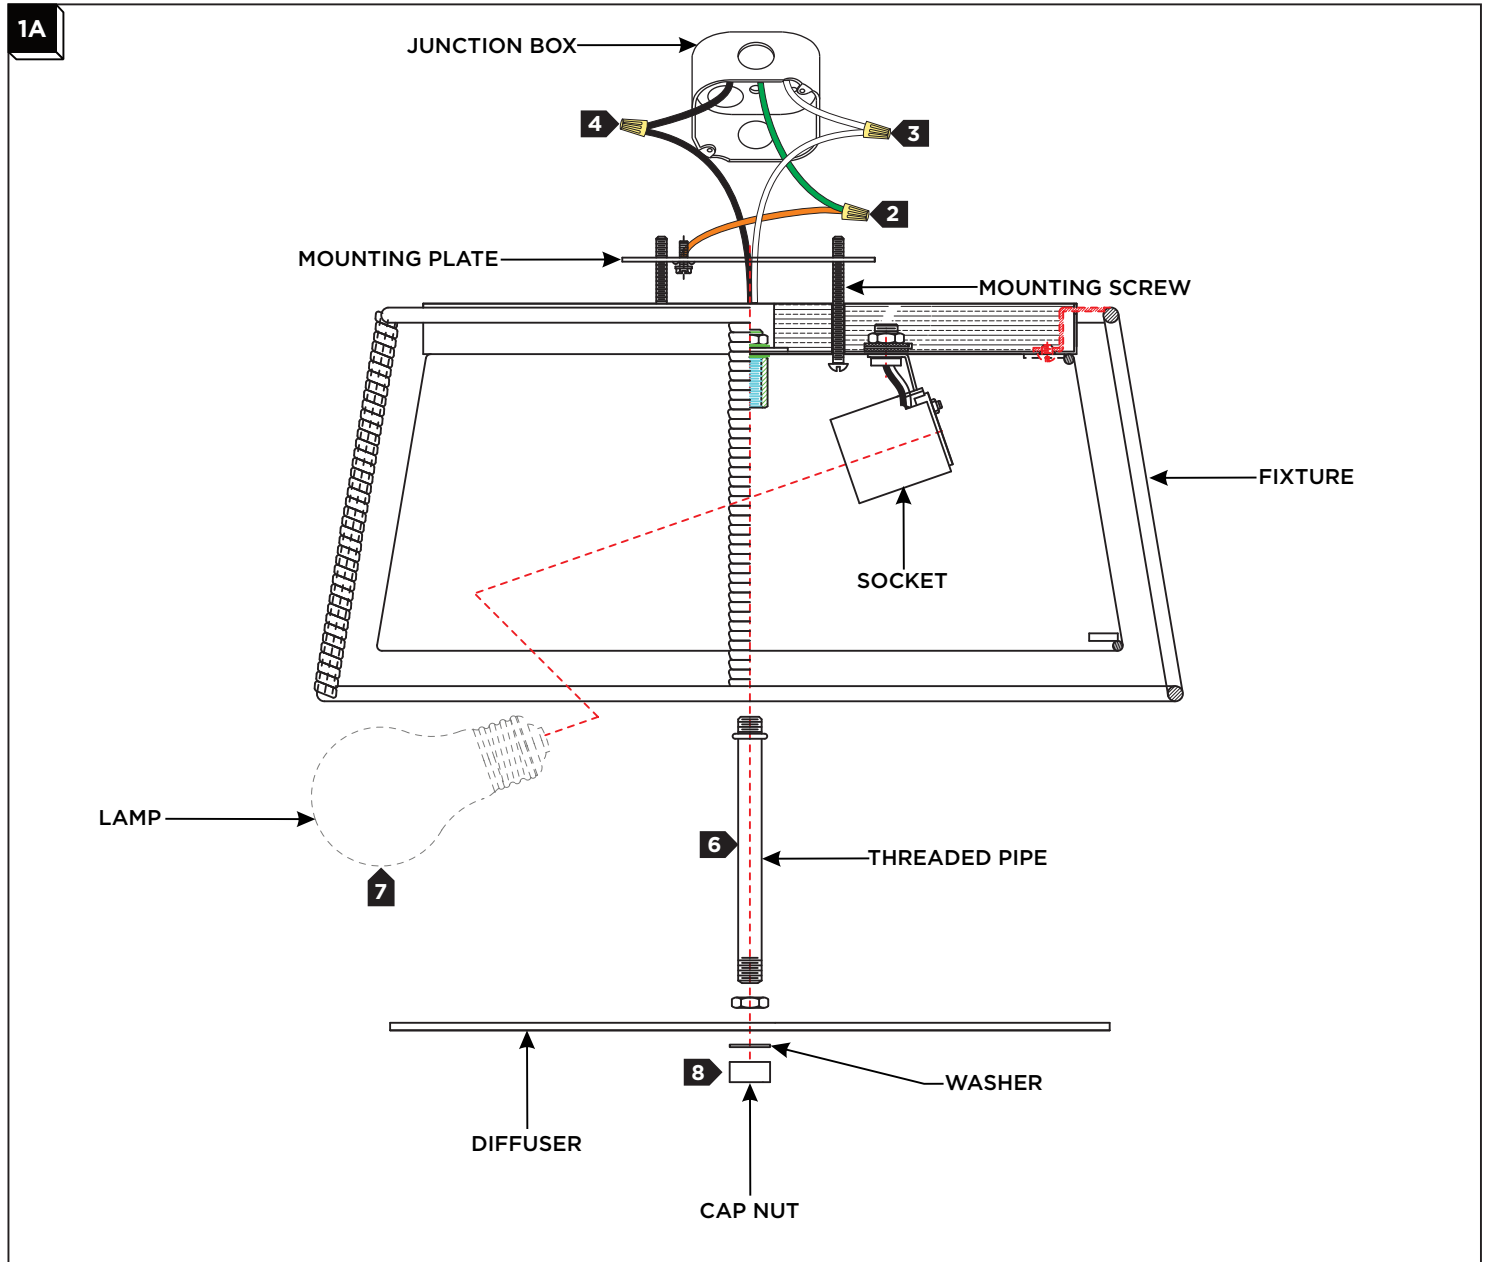

- 1 Secure the mounting plate to the junction box.
- 2 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 3 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 4 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 5 Neatly place all the wires into the junction box, then align the keyed slots on the fixture base with the mounting screws, rotate the fixture clockwise and tighten the mounting screws to screw it in place.
- 6 Screw the threaded pipe to the fixture.
- 7 Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage Information.
- 8 Place the diffuser and washer onto the threaded pipe, then secure them in place by screwing the cap nut onto the threaded pipe. **CAUTION:** Do not over tighten.