

QUICK START GUIDE

What's Included:



RDR1520™
Handheld Radio



B1520LI
Li-Ion Battery
(2000 mAh)



Antenna
ANH1520U - UHF models
ANH1520V - VHF models



BC1520
Belt Clip




PS1521
Power Supply



CH1521
Desktop Rapid Charger

Attaching the Battery:

Line up battery guide slots and slide into place until it locks in.



Attaching Belt Clip:

Align the screw holes and use a small screwdriver to fasten screws.

ATTENTION:

- Remove Battery
- Do Not Use Power Tool
- Use Screwdriver Only




Attaching the Antenna:

Be sure radio is off, line up screw threads and twist antenna clockwise until it is secure.




Connecting the Charger:

Plug power supply into the outlet and connect the other end to charger base.




Charging the Battery:

Slide battery into the charging base with or without the radio attached. Secure battery in place, Red LED will be on when charging.



Note: Charge a new battery 12 to 14 hours before initial use for best performance. Maximum battery capacity is normally achieved after two or three full charge / discharge cycles.

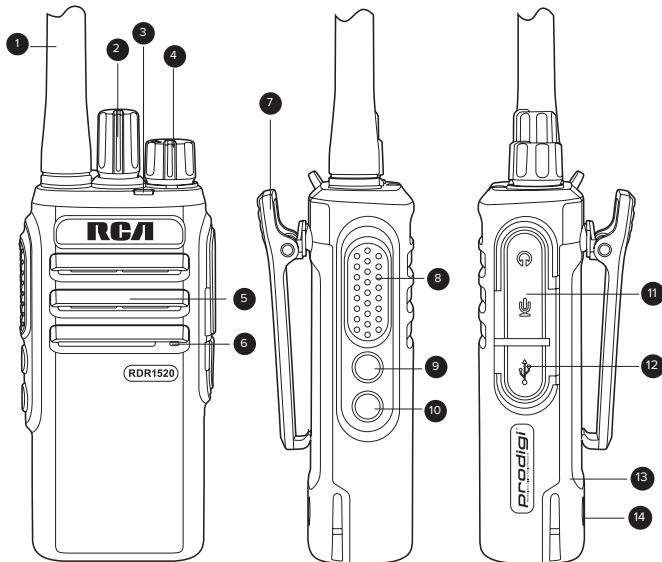

RDR1520 Configuration:

- ❶ Antenna
- ❷ Channel Knob
- ❸ LED Indicator
- ❹ On/Off/Volume Knob
- ❺ Speaker
- ❻ Microphone
- ❼ Screw-On Belt Clip
- ❽ Push-to-Talk (PTT) Button
- ❾ Side Button 1*
- ❿ Side Button 2*
- ⓫ Audio Accessory Connector
- ⓬ Micro-USB (for charging & programming)
- ⓭ Battery
- ⓮ Battery Charging Contact Points

* These buttons are programmable by your RCA Communications Systems Dealer only upon request at the time of purchase.

Download Complete Manual at: RCACommunicationSystems.com/support



Communications Systems

www.rcacommunicationssystem.com
products@rcacommunicationssystem.com
 (877) 822-2915

Created in U.S.A.