






### ASSEMBLY INSTRUCTION MODEL #9220-BK\_CEILING

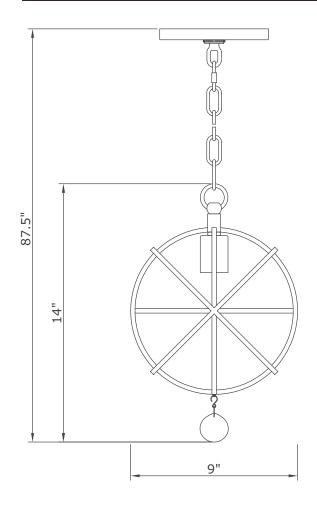








local electrical codes.



You will need 1 -Medium Bulb

60 Watts Recommended 100 Watts Max.

USE LED BULBS FOR EXTENDED USE

THIS FIXTURE IS DAMP RATED

How to Install

#### For Hanging:

- 1.Do a complete inventory of all parts and components before you start installation.
- 2.Install bulbs (not included).
- 3.Install the mounting plate onto outlet box and secure it with the outlet box screws.
- 4.Open a quick link and attach one end of the chain with the fixture loop then close the quick link.
- 5. Thread the collar ring into the canopy.
- 6.Open another quick link and attach the other end of the chain (that doesn't have a quick link) with the collar loop then the link.
- 7.Connect fixture wires into the outlet box.
- 8.Raise the canopy onto the collar loop and secure it with the collar ring.
- 9. Attach the crystal ball "A" on the bottom of fixture.
- 10.After safely attaching fixture into outlet box, proceed to connecting the power.

For Ceiling:


- 1.Repeat step: # 3-8 above.
- 2.Remove the fixture loop and attach the canopy onto the top fixture. Secure it with hex nut.

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.





#### PART NUMBER MODEL # 9220-BK\_CEILING

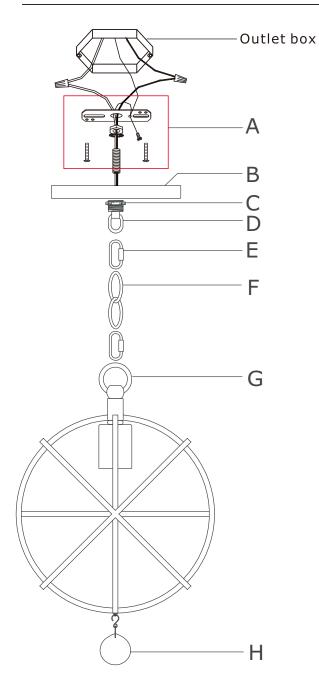

# Part Number For Ceiling:

- A1.(1) Mounting Hardware
- B1.(1) Canopy(W6", H0.75") #XRE9220BKCAN6IN
- H.(1) Crystal Ball #XRE9220BKCRY30MM

## Part Number For Hanging:

- A.(1) Mounting Hardware
- B.(1) Canopy(W6", H0.75") #XRE9220BKCAN6IN
- C.(1) Collar Ring
- D.(1) Collar Loop
- E.(2) Quick Link
- F.(1) Hanging Chain(72",4mm) #XRE9220BKCHA4MM
- G.(1) Fixture Loop
- H.(1) Crystal Ball #XRE9220BKBCRY30MM

