


## OCCUPANCY SENSOR | LED-MDC-102



### DIMENSIONS

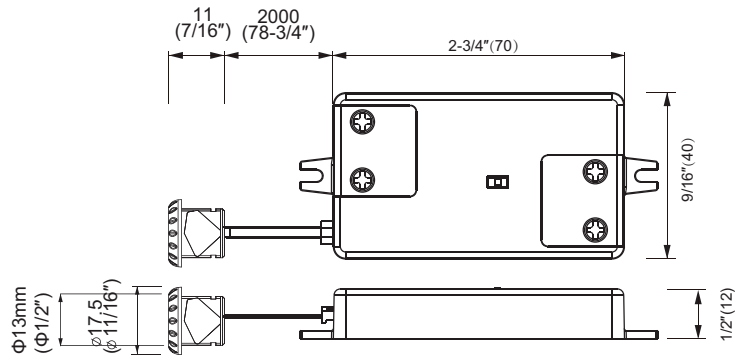


OUTPUT CURRENT	MAX. LOADING	VOLTS
2.5A	30W	12V DC
	60W	24V DC

OPERATING TEMP.	-20°C ~ +35°C
INGRESS PROTECTION	Indoor use only
WARRANTY	5 years
COMPLIANCE	

- ### FEATURES
- IR sensor for LED lighting
  - With 2 selectable functions before installation
  - Detection range: less than 5cm is recommended


### WIRING

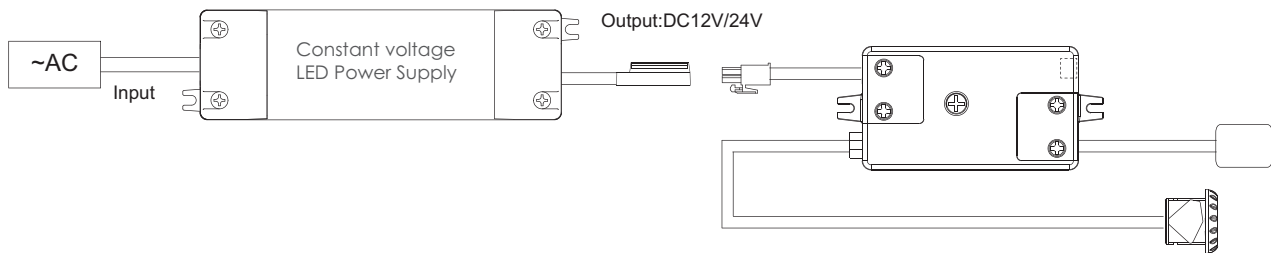

### APPLICATION

#### Function 1 (Monostable function)

1. If mounted behind a door, please select the monostable function
2. Open the door, the lights turn on
3. Close the door, the lights turn off



#### Function 2 (Bistable function)

1. If mounted outside a door or a cabinet, please select the bistable function
2. Move hand over the detector, the lights turn on
3. Move hand over the detector once again, the lights turn off

