




PS-DC16A08HD-4K

DC 12V 16A CCTV Power Supply Box

Features:

- ✧ Wall type royal blue baking finished shell, easy installation.
- ✧ Universal AC Input Range. 110V-220VAC, 47-63Hz
- ✧ DC outputs are regulated and filtered.
- ✧ Individual voltage adjustable for each output, 11-15V.
- ✧ Short circuit /Over Voltage/Over Current/Over Temp Protection.
- ✧ Individual tube fuse, PTC output protection for each port
- ✧ External LED indicator for each output
- ✧ 100% full load burn-in test, High efficiency, Long service life, high reliability

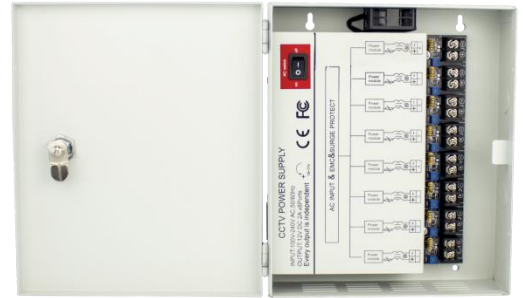

Specialty:

- ✧ Over Current protection: when over current occurs, the power supply will automatically switch to self-protection status, when condition removed, then switch back to normal.
- ✧ Short circuit protection: when short condition occurs, independent PTC fuse will open the circuit, when condition removed, PTC fuse will automatically back to close.
- ✧ High voltage protection: when high voltage occurs, the surge protection will be hit through to protect the connected device
- ✧ Thermal Cutoffs Protection (TCO): each output has independent PTC fuse and LED indicator, when problem occurs, only affect the independent output, other outputs still working.

Specifications:

Item	CCTV Power Supply Box
Model Number	PS-DC16A08HD-4K
Input Voltage	AC110 -220V
Output	DC 12V 16A 8Channel
Efficiency	≥82%
Fuse Type	PTC Fuse
Fuse Rating	2A
Operating Temperature	-10~50°C
Safety Standards	IEC/EN/UL/CSA 60950 GB4943
Withstand Voltage	IP-OP: 1.5KV, IP-FG: 1.5KV, OP-FG 0.5KVAC 30S
EMC Anti-interference	EN61000-4-2,3,4,5,6,8,11; EN61000-3-2,3; EN55022
Color	Royal Blue
Application	CCTV Camera, IP Camera, PTZ, IR Illuminator, Video process,DVR, Access Control , etc.
Certification	CE,RoHS, FCC,UL,cUL etc.

Centro Technology Limited

USA Office:15322 E Valley Blvd, City of Industry, CA91746

Phone:(626)391-8868

China Office:4th Floor; Chashu 1#,Area B,HuaFeng 1st Technology,Gushu Sanwei,Xixiang,Shenzhen

Phone:0755-23200933

Website: www.centropower.com

Email: info@centropower.com