

Outdoor PoE Passthrough Switch

Model:
PoE-EX2005-4WE



Feature

- Compatible with IEEE802.3af/at . BT 60W input.
- Extend the range of PoE and 10/100/1000Mbps Ethernet an additional 100 Meter/ 330 Feet.
- No additional power supply is required.
- Automatically detects and protects PoE equipments from being damaged by incorrect installation.
- 10/100/1000Mbps Full Jumbo Frame network throughout the whole extended.
- Compact size, Pole Mountable and Weather-proof Case.


Applications

Use with AP, IP camera, IP phone and other network equipment, Installed in hotels, schools, buildings, hospital, etc.

Parameters Table

Networking Interfaces	10/100/1000 Mbps Ethernet RJ45
Network medium	100 Meter (328ft)
Ethernet Standard	IEEE 802.af/IEEE 802.at
Dimensions	125 x 150 x 36 mm (4.92 x 5.90 x 1.42")
Weight	242g
Enclosure	White Polycarbonate
Operating Temperature	-30 to 70°C(-20 to 158°F)
Operating Humidity	5 to 95% Non condensing
PoE pin assignment	V+(Rj45 Pin 3,6) V-(Rj45 Pin 1,2)
Switching capacity	10Gbps
Typical Power Consumption	1.5W
Max. power Consumption	60W

Product Image

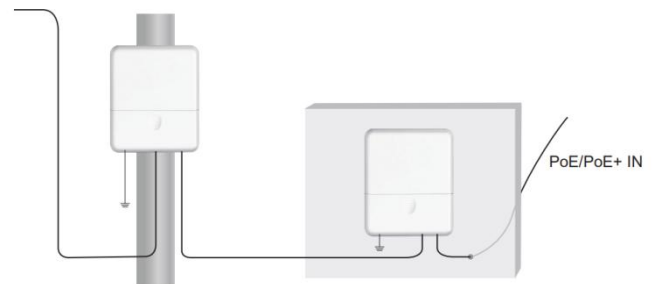

NOTE:

Please read this manual before connecting your device. It is recommended that you return your power supply to a qualified dealer for any service or repair. Incorrect connection may cause fire or electric shock.

For more information on the product, please visit our website www.centropower.com and search for the model indicated at the beginning .

For more information or questions, call us at 0755-23200933.



CENTROPOWER®

China Office:4th Floor; Chashu 1#,Area B,HuaFeng 1st Technology,Gushu Sanwei,Xixiang,Shenzhen

Phone:0755-23200933

USA Office:15322 E Valley Blvd, City of Industry,CA91746 Phone:(626)391-8868

Website:www.centropower.com Email:info@centropower.com