

PONTE SMALL TASK SCONCE

VISUAL COMFORT & CO.

PRODUCT FEATURES

- From the brand formerly known as Tech Lighting
- Head pivots/rotate 165 to direct the light exactly where it is needed
- Perfect in a bedroom or wherever additional illumination is required
- Arm to light pivot 330
- Integrated push switch dimmer
- Fully dimmable integrated LED lamp



LAMPING

Includes 7.9 watt, 389 delivered lumens, 90 CRI 3000K LED module. Built-in four way dimming. Mounts down only. Adjustable head 165°. 120V-277V.

Natural Brass



To view all available finish options, please visit techlighting.com

ORDERING INFORMATION

SLTS145	COLOR TEMP	FINISH
	303000K	NB NATURAL BRASS B NIGHTSHADE BLACK N POLISHED NICKEL

SLTS145 _____

JOB NAME _____

NOTES _____




PONTE SMALL TASK SCONCE

VISUAL COMFORT & Co.

SPECIFICATIONS

PRIMARY MATERIAL	Steel Or Brass
SHADE MATERIAL	Steel Or Brass
NET WEIGHT	2 lbs
HEIGHT	5in
WIDTH	12.6in
LENGTH	3in
MIN. EXTENSION FROM WALL	12.6in
UP LIGHT / DOWN LIGHT / BOTH?	
WET LISTED	
DAMP LISTED	
DRY LISTED	
UP / DOWN	
HORIZONTAL / VERTICAL	
WALL / CEILING MOUNT	
GENERAL LISTING	ETL Listed
ADA COMPLIANT	
INCLUDES	

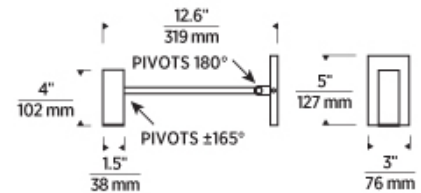

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS		389		
WATTS		7.9		
MAX WATTAGE PER BULB		7.9W		
		Universal 120V-277V Integrated 4 Way Dimming		
CCT		3000K		
CRI		90 CRI		
LED LIFETIME		>50000		
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE		Integrated LED		
LAMP SHAPE		Integrated LED		
LAMP INCLUDED?		True		
WARRANTY**		5 Years		

* Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 / JA8 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6 / JA8.	Yes		
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.			

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

