


Instruction Manual | HPW-TS01M


WIRELESS KEYBOARD HYPERWORK SILENTKEY MINI

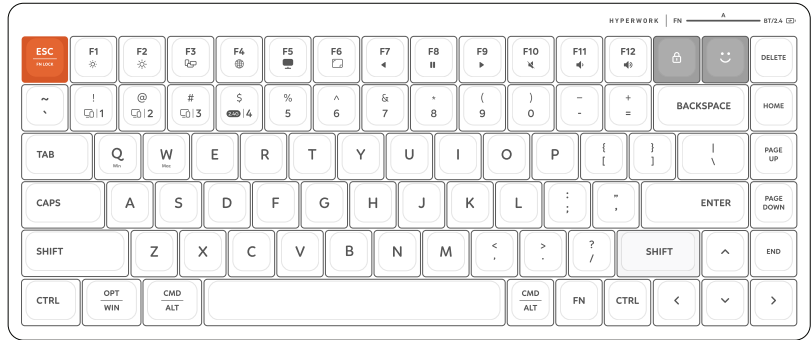

KEYBOARD CONNECTION GUIDE


2.4G Wireless Connection

- Using the USB provided at the back of the keyboard, connect it to the USB port of your computer.
- Turn on the keyboard by sliding the switch to "On".
- Continue using the switch on the top edge of the keyboard, slide it to the side with the symbol (BT/2.4G).
- The light on the keyboard will illuminate for 1 second and then turn off; at this point, the keyboard has successfully connected to the computer.
- Re-pairing the 2.4G receiver: Hold Fn + 2.4G for 5 seconds until the 2.4G light flashes continuously. At this point, connect the receiver to the computer, and the receiver will pair with the keyboard



Bluetooth Connection Guide


- Only applicable for devices with Bluetooth connectivity.
- Ensure the keyboard is turned on by sliding the switch on the upper right side to "On".
- Continue by sliding it to the connection mode "BT/2.4G".

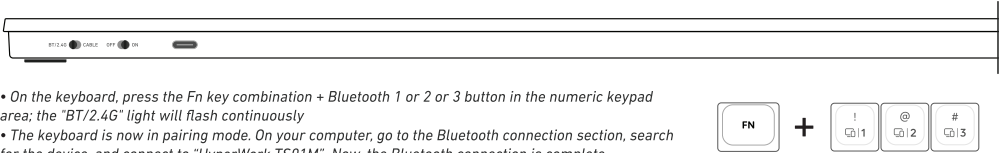

- On the keyboard, press the Fn key combination + Bluetooth 1 or 2 or 3 button in the numeric keypad area: the "BT/2.4G" light will flash continuously
- The keyboard is now in pairing mode. On your computer, go to the Bluetooth connection section, search for the device, and connect to "HyperWork TS01M". Now, the Bluetooth connection is complete.

Wired Connection

- Use the provided USB Type C cable or Type C-compatible cables to connect the keyboard to the computer.
- Slide to the "Cable" mode, and the keyboard will switch to using the wired connection.



Wireless Connection and Quick Switching Between 4 Devices

- The HyperWork SilentKey keyboard can connect to a maximum of 4 devices via USB 2.4G Wireless, Bluetooth 1, Bluetooth 2, Bluetooth 3.
- To quickly switch between the devices you have separately connected to the 4 connections above, press the Fn key combination + Bluetooth 1/2/3 or Fn + 2.4G once.

Use only one USB 2.4G to connect both the SilentKey Mini keyboard and the Silentium Mini mouse simultaneously.

- Slide to 2.4G on both the keyboard and mouse.
- On the keyboard, press and hold the Fn + 2.4G key combination for about 3 seconds until the "BT/2.4G" light flashes.
- Connect the USB 2.4G of the Silentium Mini mouse to the computer; now, both the keyboard and mouse can share this USB for signal transmission/reception.
- When not using the same receiver, you need to re-pair the 2.4G receiver with the keyboard

FN+ Multimedia combination key and other function keys

There are different shortcut keys and operating mode between Windows system and MacOS system



- F1 = System brightness -
- F2 = System brightness +
- F3 = Mission Control
- F4 = Language switch key (If your operating system supports it...)
- F5 = Minimize the current window
- F6 = Screen shot
- Emoji key = Display quick emoji menu
- FN + ESC = Lock or unlock FN

- F7 = Prev Song
- F8 = Play | Pause
- F9 = Next Song
- F10 = Volume Mute
- F11 = Volume -
- F12 = Volume +
- Lock Key = Lock your device screen
- Press and hold FN + ESC = Reset Bluetooth connection



- Fn + F1 = System brightness -
- Fn + F2 = System brightness +
- Fn + F3 = Task View
- Fn + F4 = Language switch key (If your operating system supports it...)
- Fn + F5 = Show Desktop
- Fn + F6 = Screen shot
- Emoji key = Display quick emoji menu
- FN + ESC = Lock or unlock FN


- Fn + F7 = Prev Song
- Fn + F8 = Play | Pause
- Fn + F9 = Next Song
- Fn + F10 = Volume Mute
- Fn + F11 = Volume -
- Fn + F12 = Volume +
- Lock Key = Lock your device screen
- Press and hold FN + ESC = Reset Bluetooth connection

Warranty Check
Scan the QR code and
enter Product Serial



Hướng dẫn sử dụng | HPW-TS01M


BÀN PHÍM KHÔNG DÂY HYPERWORK SILENTKEY MINI

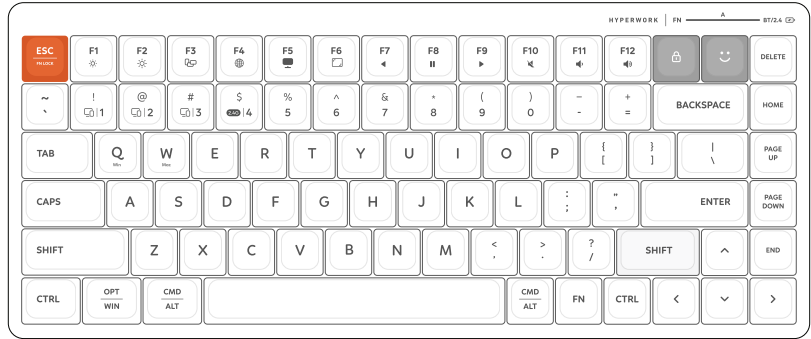

HƯỚNG DẪN KẾT NỐI BÀN PHÍM


Kết nối Wireless 2.4G

- Sử dụng USB đi kèm ở mặt sau của bàn phím, kết nối với cổng USB của máy tính
- Bật bàn phím lên bằng cách gạt sang "On"
- Tiếp tục sử dụng nút gạt ở cạnh trên phím, gạt sang bên có kí hiệu (BT/2.4G)
- Phấn đèn trên bàn phím sẽ sáng lên trong 1 giây và sau đó tắt, lúc này bàn phím đã được kết nối thành công với máy tính
- Ghép nối lại receiver 2.4G: Giữ Fn + 2.4G trong 5s cho đến khi đèn 2.4G nhấp liên tục. Lúc này hãy kết nối receiver với máy tính, receiver sẽ được ghép đôi với bàn phím.



Kết nối Bluetooth


- Chỉ áp dụng cho các thiết bị có sẵn kết nối Bluetooth
- Đảm bảo bạn đã bật bàn phím bằng cách đưa nút gạt ở cạnh trên bên phải sang kí hiệu "On"
- Tiếp tục gạt sang chế độ kết nối "BT/2.4G"

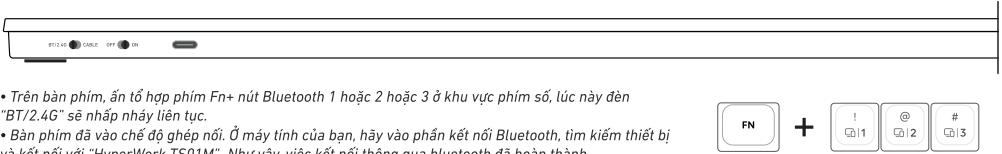

- Trên bàn phím, ấn tổ hợp phím Fn+ nút Bluetooth 1 hoặc 2 hoặc 3 ở khu vực phím số, lúc này đèn "BT/2.4G" sẽ nhấp nháy liên tục.
- Bàn phím đã vào chế độ ghép nối. Ở máy tính của bạn, hãy vào phần kết nối Bluetooth, tìm kiếm thiết bị và kết nối với "HyperWork TS01M". Như vậy, việc kết nối thông qua bluetooth đã hoàn thành.

Kết nối có dây

- Sử dụng dây USB Type C đi kèm hoặc các dây có kết nối Type C, kết nối bàn phím với máy tính.
- Gạt sang chế độ "Cable", bàn phím sẽ chuyển qua sử dụng kết nối có dây.



Kết nối không dây và chuyển đổi nhanh giữa 4 thiết bị

- Bàn phím HyperWork SilentKey có thể kết nối tới tối đa 4 thiết bị bằng USB 2.4G Wireless, Bluetooth 1, Bluetooth 2, Bluetooth 3.
- Để chuyển đổi nhanh giữa các thiết bị mà bạn đã kết nối riêng biệt với 4 kết nối ở trên, ấn 1 lần tổ hợp phím Fn + Bluetooth 1/2/3 hoặc Fn + 2.4G

Sử dụng 1 USB 2.4G duy nhất để kết nối cùng lúc Bàn phím Silentkey Mini và chuột Silentium Mini

- Gạt sang 2.4G ở cả bàn phím và chuột
- Ở trên bàn phím, hãy ấn và giữ tổ hợp phím Fn+2.4G trong khoảng 3 giây cho đến khi đèn "BT/2.4G" nhấp nháy
- Kết nối USB 2.4G của chuột Silentium Mini vào máy tính, lúc này cả bàn phím & chuột có thể sử dụng chung 1 USB này để thu/ nhận tín hiệu
- Khi không sử dụng chung 1 receiver, bạn phải tiến hành pair lại receiver 2.4G cho bàn phím

FN + Phím kết hợp đa phương tiện và các phím chức năng khác

Có các phím tắt và chế độ hoạt động khác nhau giữa hệ thống MacOS và Windows



- F1 = Giảm độ sáng màn hình
- F2 = Tăng độ sáng màn hình
- F3 = Các cửa sổ đang mở - Mission Control
- F4 = Chuyển đổi ngôn ngữ (Nếu hệ điều hành của bạn hỗ trợ...)
- F5 = Thu nhỏ cửa sổ đang mở
- F6 = Chụp ảnh màn hình
- Emoji key = Hiện thị nhanh bảng biểu tượng cảm xúc
- FN + ESC = Khóa hoặc mở khóa FN

- F7 = Bài hát trước
- F8 = Chơi | Tạm dừng
- F9 = Bài hát tiếp theo
- F10 = Im lặng
- F11 = Giảm âm lượng
- F12 = Tăng âm lượng
- Lock Key = Khóa màn hình
- Nhấn & giữ FN + ESC = Đặt lại kết nối bluetooth



- Fn + F1 = Giảm độ sáng màn hình
- Fn + F2 = Tăng độ sáng màn hình
- Fn + F3 = Các cửa sổ đang mở - Task View
- Fn + F4 = Chuyển đổi ngôn ngữ (Nếu hệ điều hành của bạn hỗ trợ...)
- Fn + F5 = Xem Desktop
- Fn + F6 = Chụp ảnh màn hình
- Emoji key = Hiện thị nhanh bảng biểu tượng cảm xúc
- FN + ESC = Khóa hoặc mở khóa FN

- F7 = Bài hát trước
- F8 = Chơi | Tạm dừng
- F9 = Bài hát tiếp theo
- F10 = Im lặng
- F11 = Giảm âm lượng
- F12 = Tăng âm lượng
- Lock Key = Khóa màn hình
- Nhấn & giữ FN + ESC = Đặt lại kết nối bluetooth

Warranty Check
Scan the QR code and
enter Product Serial

