GUARDIAN
SUPPORT SERVICES

Smart IP Camera with Battery

Quick User Guide

100% Wire-Free IP Camera with rechargeable battery

Place it Anywhere

1. Packing list

1 x camera

1 x magnetic mount

1 x screw mount

1 x USB cable

1 x Quick User Guide

2. Install APP

2.1 Download IDFI Smart APP from google play or apple store.

2.2 Register account and login

2.2.1 Select Country

2.2.2 Input mobile phone number or Email

2.2.3 Set password

2.2.4 Login with new account and password

3. Add Device

3.1 Insert micro SD card – If required

Please insert a micro SD card to record videos when motion detected and playback. (card not included, supports 128GB Max.)

1. NOTE: Please insert the SD card before power is turned on, otherwise, the SD Card cannot be read.

3.2 Power on the camera

Press and hold on the top Power Button for 5 seconds to Turn on Camera (if it does not power up, plug in DC5V 1A/2A phone adapter to charge 15min first).

Power adapter is not included in packing list.

Indicator Slowly blinking in red

NOTE: Ensure the indicator light slowly blinking in RED before setup WiFi

3.3 Setup Wi-Fi

3.3.1 Bring the camera and phone to the router within 1 to 3 feet (30 to 100 cm) and connect WiFi.

Camera   Router   30cm~100cm   Smartphone

NOTE: Please note camera only works under 2.4G WiFi.

3.3.2 Run the IDFI Smart App, select "Security & Sensor" "Smart Camera"

3.3.3 Add Device

3.3.4 Enter Wi-Fi Password

3.3.5 Scan with the Camera

< **Add Manually** Search

Electrical

Smart
Lighting

Home
Appliances I

Home
Appliance...

Kitchen

Security
& Sensor

Sport
& Health

Others

Smart
Camera

Alarm
(bluetooth)

Alarm
system（...

Emergency
Button
(ZigBee)

Emergency
Button

Lock（Wi-
Fi）

Lock
(ZigBee)

Door and
Window S...
(ZigBee)

Door And
Window S...
(bluetooth)

Door
Sensor

sensor（Wi
-Fi）

Gas Alarm
(ZigBee)

Flooding
detector
(ZigBee)

CO Alarm
(ZigBee)

HEAT
ALARM
(ZigBee)

Enter Wi-Fi Password

Only support 2.4GHz Wi-Fi network
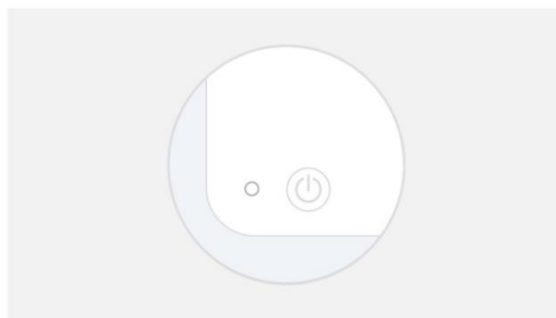
��   anyuanweishi   Change Network

🔒   ••••••••••••••••••   👁

OK

Add Device

Power the device on and make sure the indicator is flashing quickly or a prompt tone is heard
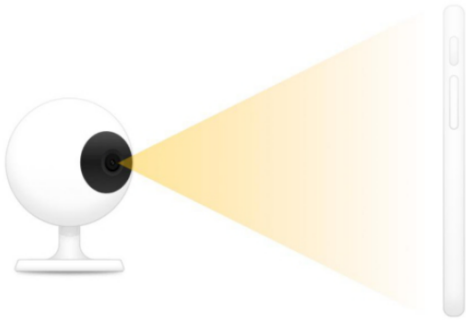
Help

next step

Add Device

Add Device

Scan with the camera

When you tap CONTINUE, the mobile phone displays a QR code. Hold the camera 15 to 20 cm in front of the mobile phone for the camera to scan the QR code.

15~20cm

Continue

Heard nothing at all

Heard the beep

Connecting

Make sure your router, mobile, and device
are as close as possible

40%

Device found
Register device to the smart cloud
Initializing device

Davis ∨

Welcome home

Set your home location, get more information >

All devices   Living Room   Bedroom   Secor •••
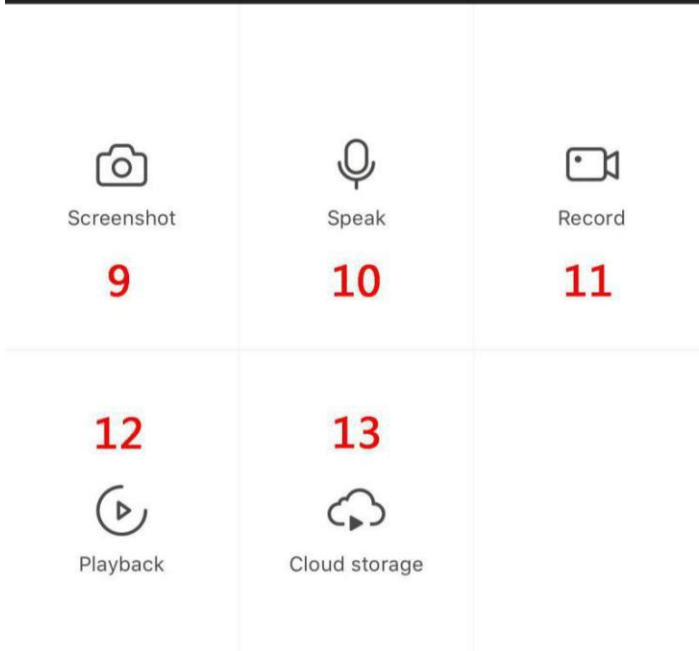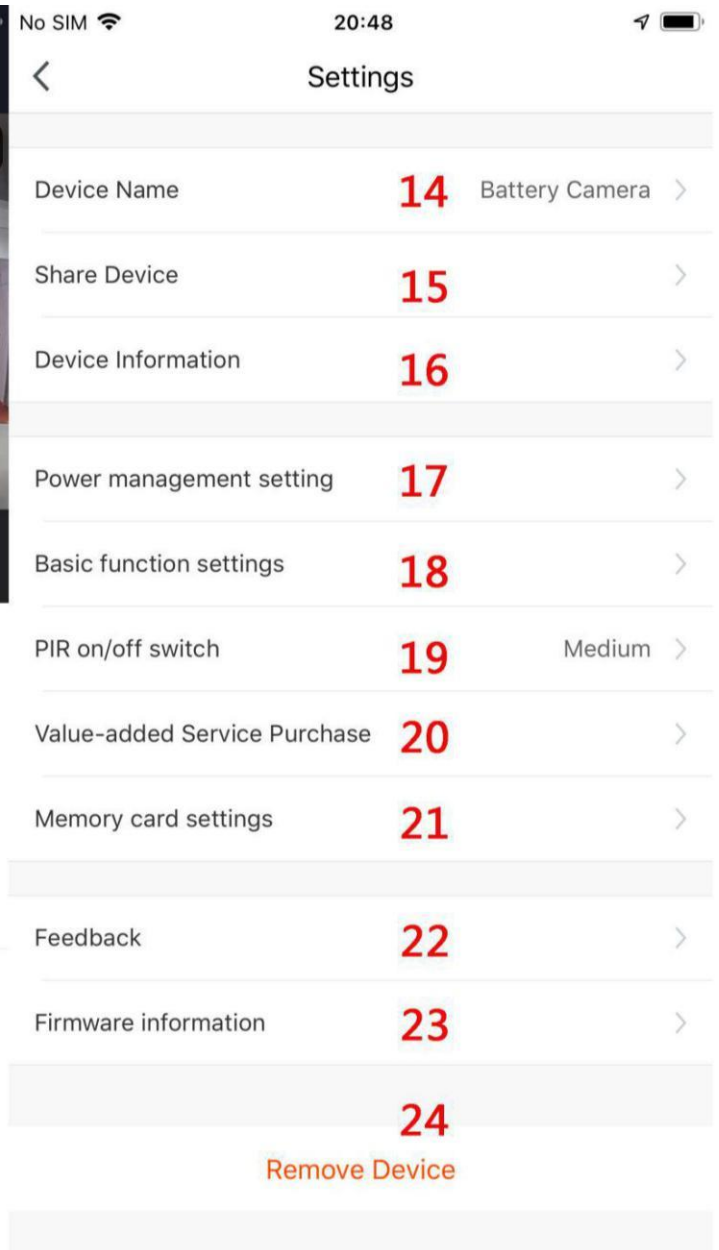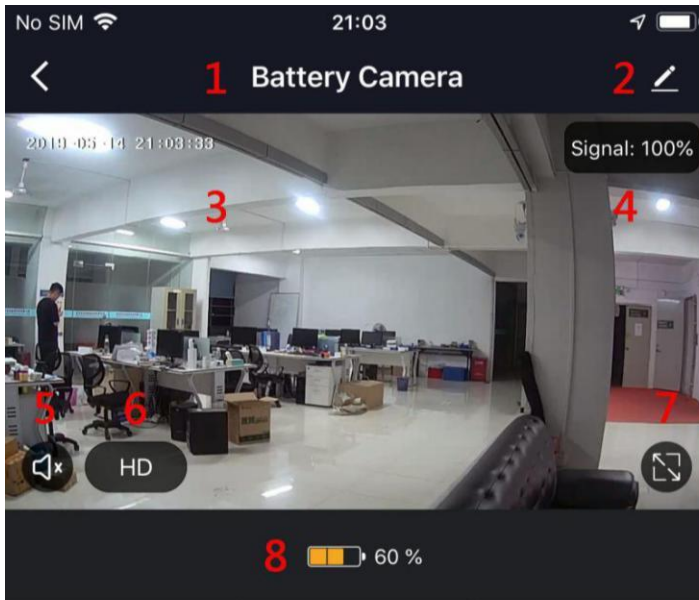
Battery Camera
Online

Home   Smart   Me

Camera Menu

No SIM 📶 21:03	**No SIM** 📶 20:48
‹ **1** Battery Camera **2** ✎	‹ Settings
2018-05-14 21:03:33 Signal: 100%	
3 **4**	Device Name **14** Battery Camera ›
	Share Device **15** ›
5 **6** **7**	Device Information **16** ›
🔇 HD ⛶	
8 🔋 60 %	Power management setting **17** ›
	Basic function settings **18** ›
📷 🎤 📹	PIR on/off switch **19** Medium ›
Screenshot Speak Record	Value-added Service Purchase **20** ›
9 **10** **11**	Memory card settings **21** ›
12 **13**	Feedback **22** ›
▶ ☁▶	Firmware information **23** ›
Playback Cloud storage	
	24
	Remove Device

APP Menu	Camera Settings & Options
1. Camera Name	14. Device Name
2. Camera Settings	15. Share Device
3. Camera Time	16. Device Information
4. Network Signal strength	17. Power Management Setting
5. Audio	18. Basic Function Settings
6. HD/SD	19. PIR on/off switch
7. Full Screen	20. Value Added Service Purchase
8. Battery Charge	22. Feedback
9. Screen Shot	23. Firmware Information
10 Speak	24. Remove Device
11 Record	
12 Playback	
13 Cloud Storage	

6. Share Video

6.1. Add your Friend's account in app

NOTE: Firstly ensure your Friend's account is already registered in the IDFI Smart app

6.2 Share video to your Friend's account
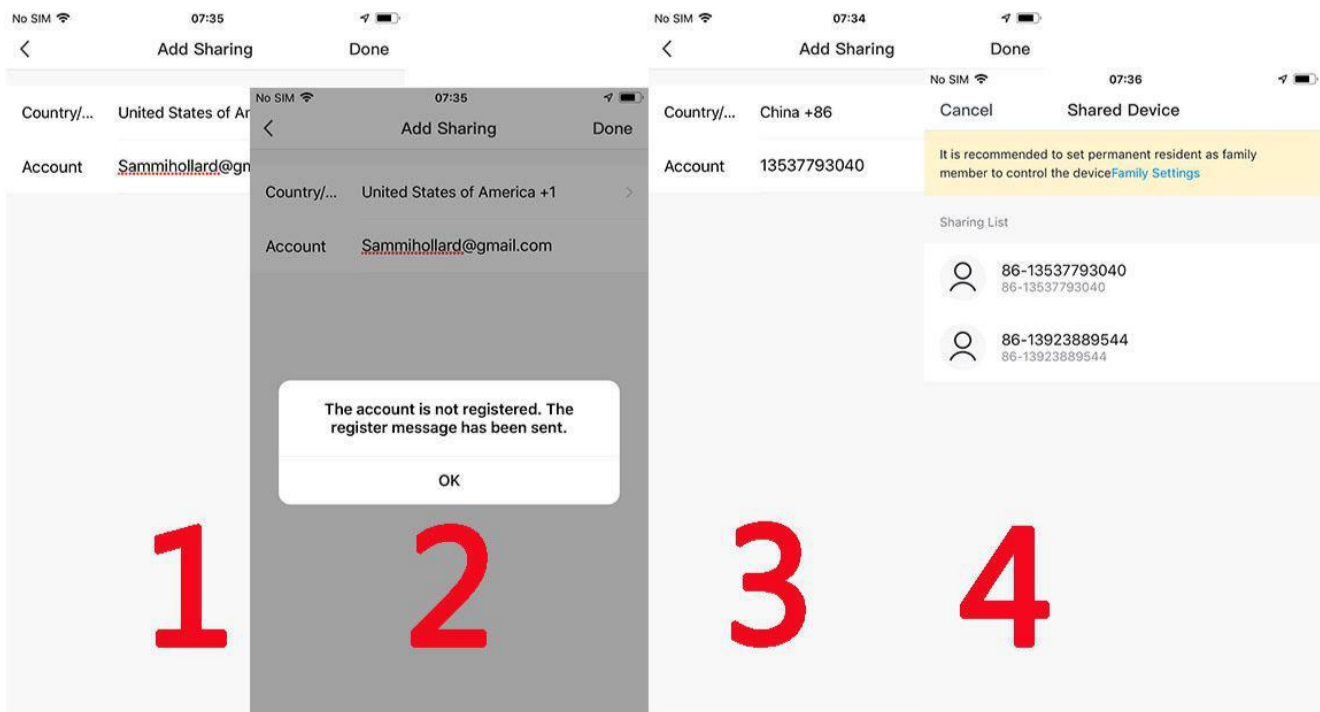
7. Alarm Push Notification and playback

Battery camera with PIR sensor is not designed for 7X24 all day recording, but just push alarm message notification to phone app and record video to SD card when PIR sensor detected human body motion events, then you can playback the motion videos wherever you are via IDFI Smart App.

Enable IDFI Smart app notification in mobile setting and also mobile volume is on

8. When the PIR is triggered, camera and system activates:

1. Alarm Sound in app
2. Alarm Message a (please enable IDFI Smart app a in mobile   settings)
3. Alarm snapshot and video record on SD card (please insert SD Card)
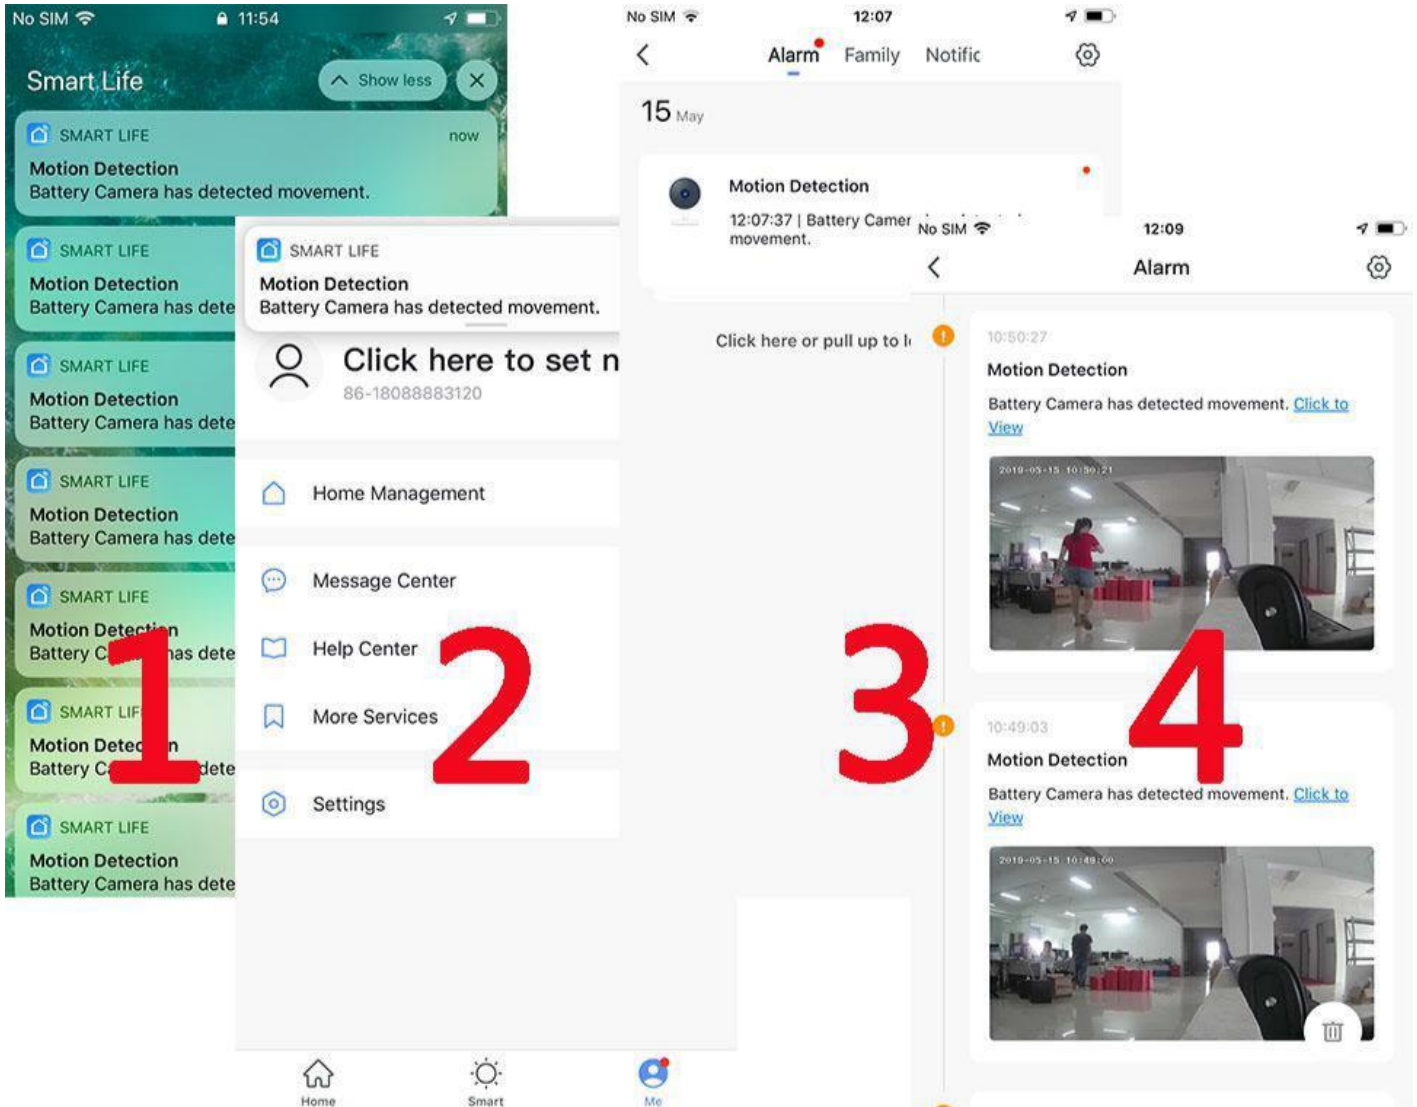
9. To reduce false alarms, please note that:

- Do not install the camera facing any objects with bright lights, including sunshine, bright lamp lights, etc.
- Do not place the camera too close to a place where there frequently moving vehicles. Based on numerous tests, the recommended distance between the camera and vehicle is 15 meters
- Stay away from the outlets, including air conditioner vents, humidifier outlets, the heat transfer vents of the projectors, etc.
- Do not install the camera facing the mirror.
- Keep the camera at least 1 meter away from any wireless devices, including Wi-Fi routers and phones, in order to avoid wireless interference.

Appendix:

LED Status Description

No.	LED Status	Camera Status
1	Slow blinking Red	Awaitng WiFi Connection
2	Fast blinking Red	WiFi Connecting
3	Solid on Red	Network is abnormal
4	Solid on Blue	WiFi Connected

Trouble Shooting		
No.	Description	Solution and operations
1	Unable to connect	Check your WiFi name and password Ensure your WiFi is 2.4Ghz Ensure your camera and phone are close to the router
2	Reset	Press and hold the rest button for 5 seconds Hear one "bing" sound Red light turns to slow blinking
3	Change to a new network	Press reset key to factory default settings Re-connect
4	Failed to add device	Enable IDFI Smart App cellular data on in mobile settings
5	No Alarm Notification	Enable IDFI App notification in mobile settings
6	No Alarm Video Recording	Please insert SD Card

GUARDIAN
SUPPORT SERVICES

www.guardiansupportservices.co.nz

support: 0277181061
email: support@guardiansupportservices.co.nz