


Mister-T2 & Mister-T2 Pro

Barcode Scanning Worksheet

ECOFREEN®

You will now be able to program the Mister T2 Pro for your next jobs at a scan of a barcode. Simply scan the barcode and press the step pedal (if using the manual method). The barcode consists of 12 numbers, which can be broken up into 8 portions.

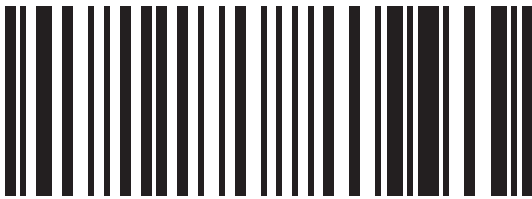

110110110350



X	XX	X	XX	X	XX	X	XX
1	2	3	4	5	6	7	8

1. Pretreat Round Trip

- Description: If you want to spray pretreat one way or both ways.
- 0 - Unidirectional Spray
- 1 - Bidirectional Spray

2. Spray Density/ Volume (2 Digits*)

- Description: The density/ volume of pretreat you want.
- 0 - Unidirectional Spray
- 1 - Bidirectional Spray

3. Left Column Spray On/Off

- Description: Turn on/off to pretreat for the left column.
- 0 - Left spray off (no spray)
- 1 - Left spray on (spray)

4. Left Spray Location (2 Digits*)

- Description: If you want to spray pretreat one way or both ways.
- First digit - 1 ~ 0
- Second digit - 1 ~ 0
- Example: 36 means pretreat from 3rd cell to 6th cell

5. Right Column On/Off

- Description: Turn on/off to pretreat for the right column.
- 0 - Right spray off (no spray)
- 1 - Right spray on (spray)

6. Right Spray Location (2 Digits*)

- Description: If you want to spray pretreat one way or both ways.
- First digit - 1 ~ 0
- Second digit - 1 ~ 0
- Example: 10 means pretreat from 1st cell to 10th cell

7. Auto Start

- Description: Auto Start on/off and time to start pretreating (if on). Digit means how long (in seconds) it will start automatically.
- 0 - Auto start off. Will need to step on the pedal (foot switch) or manually press the start button.
- 1 - 9 - Auto start on
- 1 - Auto start after 1 second
- 2 - Auto start after 2 seconds
- ~
- 9 - Auto start after 9 seconds

8. Continuous Spraying (2 Digits*)

- Description: Determines how many shirts to continuously pretreat before the next pass.
- First digit - 0 ~ 9
- Second digit - 0 ~ 9
- Example: 10 means it will continuously spray 10 shirts

*2 Digits: If you want to have a number 10 or more, use the first digit to indicate. If you want 9 or less, use "0" for the first digit (if applicable). Some portions do not allow for less than 10.