



Model: **SPJ-FL600-15V**

SPECIFICATION FEATURES

The Flex-Link™ landscape lighting transformer series. Featuring multiple voltage outputs from 12-15 volts.

Stainless steel enclosure is rain-tight with hinged lockable cover and multiple knockouts throughout bottom and sides. Features include removable timer and field installed photocell. All units “plug and go” ready for field install accessories.


FEATURES & OPTIONS:

- STAINLESS STEEL NEMA STYLE RAIN-TIGHT KEYHOLE MOUNT ENCLOSURE
- LARGE WIRING VOLTAGE TAP LUGS
- COMPLETE WIRING INSTRUCTIONS
- TIMER, 24 HOUR REMOVABLE
- PHOTOCELL, FIELD INSTALL
- 6' OUTDOOR LINE CORD
- LOW VOLTAGE CIRCUIT BREAKER. ONE BREAKER PROTECTING EACH OUTPUT CIRCUIT
- ETL 1838
- LIFETIME WARRANTY

Flex-Link™ Transformers

DESCRIPTION

Model#: SPJ-FL600-15V
Shown: Stainless Steel
Electrical Input: 120V
Electrical Output: 12-15V
Max. Watts: 600 Watts
Circuit: 3 Circuits
Dimmable: Yes

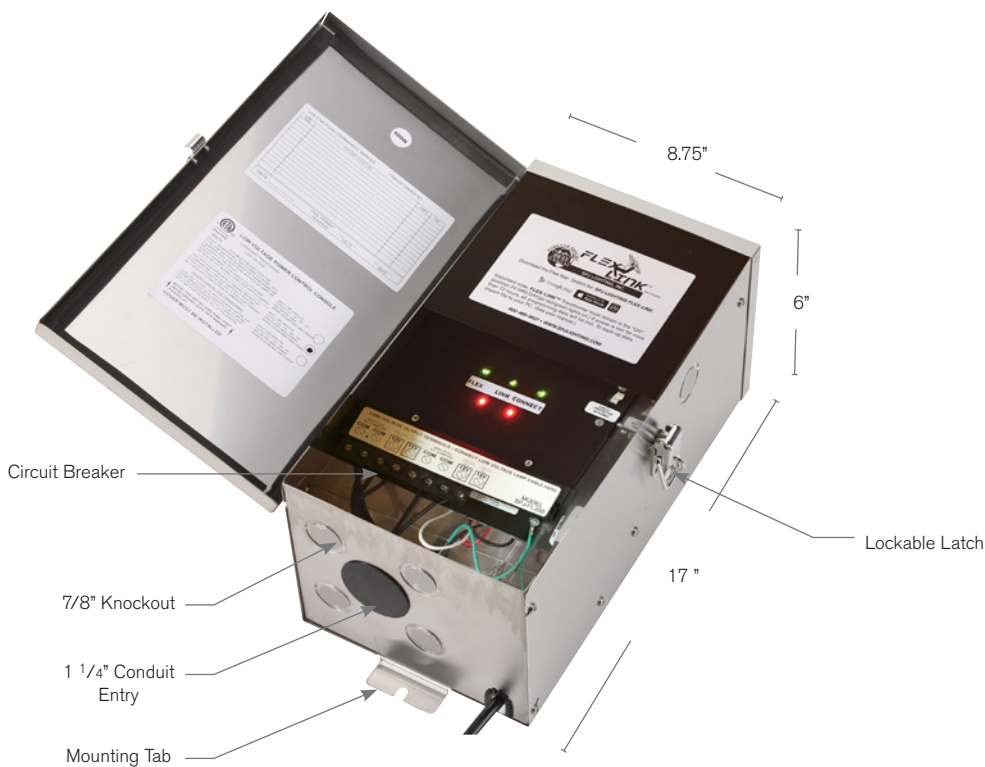

Wet Listed

ORDERING INFORMATION

Model#	Electrical Input	Electrical Output	Wattage	Circuit
SPJ-FL600-15V	120V	12-15V	600W	3
	120V	12-15V	600W	3