

# M800BT USER GUIDE



## Wireless Communication Headset USER GUIDE V2.0



### Specifications


Pairing Name: M800BT  
 Bluetooth Specification: V5.1 ,dual mode, downward compatible.  
 Frequency Range: 2.4GHz-2.480GHz  
 Modulation: GFSK,π/4 DQPSK, 8DPSK  
 Two Bluetooth devices can be connected at the same time.  
 Transmission Distance: up to 30 meters (Transmission distance varies depending on the environment and Bluetooth device)  
 Maximum Talk Time: 12 hours  
 Standby Time: 250 hours  
 Working Temperature: 0°C to 45°C

**Speaker:**  
 Resistance: 32 ohms  
 Frequency: 20Hz-20KHz, Hi-fi  
 Sensitivity: 115dB±3dB  
 Distortion: ≤ 1%

**Microphone:**  
 Microphone: Noise Canceling  
 Sensitivity: -38dB±3dB  
 Crystal clear sound and voice (DSP)

**Headset Battery:**  
 Type: Lithium-ion polymer  
 Capacity:150mA per hour stand  
 Battery Capacity: 150mAh  
 Charging Voltage: 5V DC  
 Life Time: Minimum recharging 1000 times  
 Operating Temperature: -10°C to +60°C  
 Charging Time: 2 hours  
 Charging Interface: Micro USB

**Charging Base**  
 Size:74.7\*74.7\*52mm Net Weight:105g

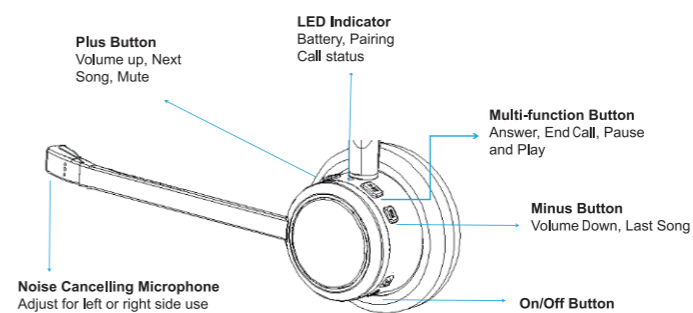

### Button Function:

Button	Function	Action
On/Off Button	Headset on	Slide switch to icon "On"
	Headset off	Slide switch to icon "Off"
Plus Button	Volume up	Press the button to increase the speaker volume
	Next song	Press the button for 2 seconds to switch to the next song when playing music
	Mic mute	Press the button for 2 seconds to activate "mute" during a call. Press the Plus button for 2 seconds to cancel "mute".
Minus Button	Volume down	Press the Minus button to decrease the speaker volume.
	Last song	Press the Minus button for 2 seconds to switch to last song when playing music
Multi-function Button	Pause	Press the MFB button when playing music
	Answer /end call	Press the MFB to answer/end mobile calls
	Reject call	Press the MFB for 2 seconds to reject mobile calls. To reject the second incoming call when on the first call, press the MFB and hold for 2 seconds.
	Call Switch	When the headset is busy on the first call, quick press twice the MFB to switch to the second call, the first call will hold and stay online. Quick press twice again to switch to the first call, the second call will hold and stay online.
	Answer the second call	Press twice the MFB to answer the second incoming call and put the first call on hold.
	End the second call	Quick press once the MFB to end current call and meanwhile switch to another call. Press once again to end the second call.
	Activate voice assistant	In the state of no calling, press the MFB for 2 seconds to activate voice assistant on mobile phone.

### Headset LED Indicators

Headset Status	LED Status
Pairing Mode	Light flashes blue and red alternately
Pairing Successfully	Light flashes blue repeatedly every 5 seconds
Battery Low	Light flashes red continuously
Charging Mode	Red light continuously on
Fully Charged	Blue light continuously on

### Prompt Tone Introduction

Headset Status	Tone
Power on	Power on
Power off	Power off
Pairing Successfully	Connected
Battery Low	"toot" every 5 minutes
Mic Mute	"toot" every 10 seconds

### Pairing with Bluetooth Device

- Be sure that your smart phone, laptop or desk phone has Bluetooth function.
- Activate the Bluetooth function on your smart phone, laptop or desk phone.
- Turn on your headset (slide switch to "ON"), you will hear prompt tone "power on". The Led indicator will flash red and blue alternately, which indicates the headset is in pairing mode.
- (If pairing fails, the headset will power off automatically after indicator flashes 5mins, with prompt tone "power off" heard.)
- Pair headset to your smart phone, laptop or desk phone.
  - Search Bluetooth device on your smart phone, laptop or desk phone.
  - Open "Bluetooth" menu and press "discover" or "add" to search M800BT on your smart phone, laptop or desk phone.
  - When M800BT shows on your Bluetooth devices list, please click it to start pairing. Prompt tone "connected" will be heard when pairing is successful, and the LED indicator will repeatedly flash blue every 5 seconds.
  - This headset can store devices ever paired in memory. When powered on, the headset will automatically connect to the first two devices in memory.

### Function Introduction

- Pair with 2 devices simultaneously  
 M800BT can pair with 2 devices simultaneously.
  - Connect the first device with M800BT
  - Turn off the Bluetooth function of the first device
  - Connect the second device with M800BT
  - Turn on the first device's Bluetooth function, then M800BT is paired with both devices.
- Redial function  
 Quick press the multi-function button twice to redial the last call.
- One-touch play function  
 Press the multi-function button once, the default music player of the mobile phone will play automatically (some mobile phones cannot implement this function).
- Automatic re-connection function  
 Bluetooth connection can be automatically re-connected if disconnected within 5 minutes in the effective distance. If reconnect fails, please turn off the headset and turn it on again to reconnect.
- Mic mute function  
 Press the plus button for 2 seconds to activate mute during a call, repress the plus button for 2 seconds to cancel mic mute. The tone "toot" will be heard every 10seconds during mic mute status.
- Call Switch
  - Press the MFB once to answer the first incoming call. Press twice to answer the second incoming call and put the first call on hold.
  - Quick press twice the MFB to switch to the first call, the second call will stay online.
  - Quick press once the MFB to end the current call and meanwhile switch to another call, press once again to end the second call.
  - Press and hold the MFB for two seconds to reject the second incoming call when the headset is busy for the first call.
- Activate voice assistant  
 In the state of no calling, press the MFB for 2 seconds to activate voice assistant on mobile phone.
- Reset Function  
 Press and hold the plus and minus buttons simultaneously for 5 seconds, there will be prompt tone "toot, toot". Pairing history record will be deleted when prompt tone "disconnected" heard.

### ⚠ Cautions:

- Most mobile phones have headset power level on screen. When headset battery is low, the headset will beep once in 5 mins and the indicator will turn red. Please charge it in time.
- Do not connect the full-charged headset to the charging cable for a long time. Overcharging will shorten battery life.
- Please keep the headset battery safe. Do not put the battery or the headset into fire or water to avoid explosion.
- Do not use headset with high volume for extra long time, which may cause hearing loss. Always listen at a moderate level.
- Do not charge with high voltage device, which may cause damage to the headset.
- Make sure that the headset is fully charged before using it if unused for a long time.
- Lifetime of the battery will be significantly reduced if your device is left uncharged for a long time. We therefore recommend that you recharge your device at least once a year.

### Product Warranty Card

Customer Name		Product Model No.	
Date of Purchase		Tel No./E-mail:	
Problem Description:			
Microphone	Speaker	Battery	Buttons
Warranty: Failure of headset buttons, speaker or microphone; charge unavailable.			
Out of Warranty:			
1.Ear cushions broken.			
2.Fail to follow the user manual or disassemble the headset.			
3.Incorrect connect with high voltage device for charging which causes earphone damage.			
4.Artificial damage caused by impact, falling, water, pulling.			
OQC CHECKING			