



M890BT USER GUIDE

MAIRDI Wireless Communication Headset USER GUIDE V2.0

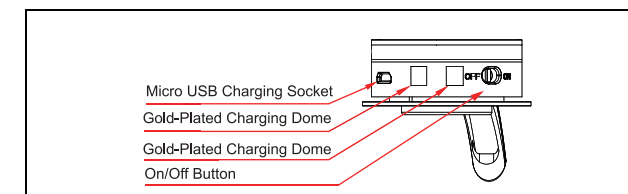

Pairing Name: M890BT
 Bluetooth Specification: V5.1, dual mode, downward compatible
 Frequency Range: 2.4GHz-2.480GHz
 Support Protocols: A2DP, AVRCP, HFP, AAC, etc
 Two Bluetooth devices can be connected at the same time
 Transmission Distance: up to 30 meters (Transmission distance depends on the environment and Bluetooth device)
 Maximum Talk Time: 20 hours
 Standby Time: 200 hours
 Working Temperature: 0°C to 45°C
Speaker:
 Frequency: 20Hz-20KHz, Hi-fi
 Distortion: ≤1%
Sound Channel:
 Binaural: Stereo
 Monaural: Mono
Microphone:
 Microphone: Directional noise reduction microphone
 Acoustic Noise Canceling Structure
 Crystal clear sound and voice (DSP)
Headset Battery:
 Type: Lithium-ion polymer
 Battery Capacity: 320mAh
 Charging Voltage: 5V DC
 Life Time: Minimum recharging 1000 times
 Operating Temperature: -10°C to +60°C
 Charging Time: 2 hours
 Charging Interface: Micro USB
Charging Base:
 Net Weight: 115g
Headset Net Weight:
 M890BT Mono 70g
 M890BT Duo 95g

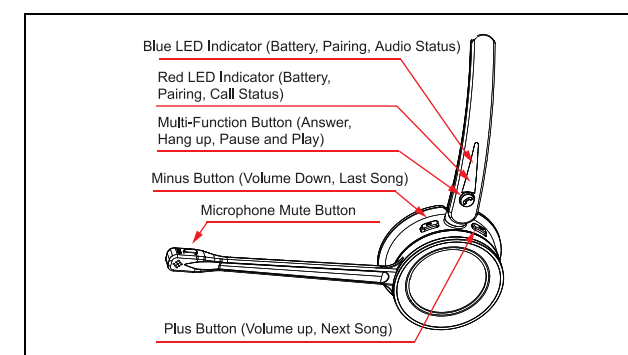

Button Function

Button	Function	Action
On/Off Button	Headset on	Slide switch to icon "ON"
	Headset off	Slide switch to icon "OFF"
Plus Button	Volume up	Press the Plus button to increase the speaker volume
	Next song	Long press the Plus button to switch to next song when playing music
Mic Mute	Mic mute	Press the mute button to activate mic mute during a call, there will be "toot" every 10 seconds while mute, repress the mute button to cancel mic mute
	Volume down	Press the Minus button to decrease the speaker volume
Minus Button	Last song	Long press the Minus button to switch to last song when playing music
	Pause	Press the MFB button when playing music
Multi-function Button	Answer/end call	Press the MFB to answer/end mobile calls
	Reject call	Press the MFB for 2 seconds to reject mobile calls. To reject the second incoming call when on the first call, press the MFB and hold for 2 seconds.

Multi-function Button	Call Switch	When the headset is busy on the first call, quick press twice the MFB to switch to the second call, the first call will hold and stay online. Quick press twice again to switch to the first call, the second call will hold and stay online.
Multi-function Button	Answer the second call	Press twice the MFB to answer the second incoming call and put the first call on hold.
	End the second call	Quick press once the MFB to end current call and meanwhile switch to another call. Press once again to end the second call.
	Activate voice assistant	In the state of no calling, press the MFB for 2 seconds to activate voice assistant on mobile phone.

Prompt Tone Introduction

Headset Status	Tone
Power on	Power on
Power off	Power off
Pairing Successfully	Connected
Battery Low	"toot" every 5 minutes
Mic Mute	"toot" every 10 seconds

Headset LED Indicators

Headset Status	LED Status
Pairing Mode	Light flashes blue and red alternately
Pairing Successfully	Light flashes blue repeatedly every 5 seconds
Battery Low	Light flashes red rapidly
Charging Mode	Red light continuously on
Fully Charged	Blue light continuously on
Audio Status	Blue light in the state of breathing, and the red light off
Call(Busy) Satus	Red light in the state of breathing, and the blue light off

Pairing with Bluetooth Device:

- Be sure that your smart phone, laptop or desk phone has Bluetooth function.
- Activate the Bluetooth function on your smart phone, laptop or desk phone.
- Turn on your headset (slide switch to "ON"), you can hear prompt tone "power on". The Led indicator will flash red and blue alternately, which indicates the headset is in pairing mode.
- (If pairing fails, the headset will power off automatically after indicator flashes 10 mins, with prompt tone "power off" heard.)
- Pair headset to your smart phone, laptop or desk phone.
 - Search Bluetooth device on your smart phone, laptop or desk phone.
 - Open "Bluetooth" menu and press "discover" or "add" to search M890BT on your smart phone, laptop or desk phone.
 - When M890BT shows on your Bluetooth devices list, please click it to start pairing. Prompt tone "connected" will be heard when pairing is successful, and the LED indicator will repeatedly flash blue every 5 seconds.
 - This headset can store devices ever paired in memory. When powered on, the headset will automatically connect to the first two devices in memory.

Function Introduction

- Pair with 2 devices simultaneously
 M890BT can pair with 2 devices simultaneously.
 - Connect the first device with M890BT
 - Turn off the Bluetooth function of the first device
 - Connect the second device with M890BT
 - Turn on the first device's Bluetooth function, then M890BT is paired with both devices.
- Redial function
 Quick press the multi-function button twice to redial the last call.
- One-touch play function
 Quick press the multi-function button once, the default music player of the mobile phone will play automatically (some mobile phones cannot implement this function).
- Automatic re-connection function
 Bluetooth connection can be automatically re-connected if disconnected within 10 minutes in the effective distance. If reconnect fails, please turn off the headset and turn it on again to reconnect.
- Mic mute function
 Long press the mute button to activate mic mute during a mobile call, repress the mute button to cancel mic mute. The tone "toot" will be heard every 10 seconds during mic mute status. The mic mute function may not be available on softphones in computers because the softphone systems limited.
- Call switch
 - Press the MFB once to answer the first incoming call. Press twice to answer the second incoming call and put the first call on hold.
 - Quick press twice the MFB to switch to the first call, the second call will stay online
 - Quick press once the MFB to end the current call and meanwhile switch to another call, press once again to end the second call.
 - Press and hold the MFB for two seconds to reject the second incoming call when the headset is busy for the first call.

- Activate voice assistant
 In the state of no calling, press the MFB for 2 seconds to activate voice assistant on mobile phone.
- Reset Function
 Press and hold the plus and minus buttons simultaneously for 5 seconds, there will be prompt tone "toot, toot". Pairing history record will be deleted when prompt tone "disconnected" heard.

⚠ Cautions

- Most mobile phones will display headset power level on the screen. When headset battery is low, the headset will beep once in 5 minutes and the indicator will turn red. Please charge it in time.
- Do not connect the full-charged headset to the charging circuit for a long time. Overcharging will shorten battery life.
- Please keep the headset battery safe. Do not put the battery or the headset into fire or water to avoid explosion.
- Do not use headset with high volume for extra long time, which may cause hearing loss. Always listen at a moderate level.
- Don't charge with high voltage device, which may cause damage to the headset.
- Make sure that the headset is fully charged before using it if unused for a long time.
- Lifetime of the battery will be significantly reduced if your device is left uncharged for a long time. We therefore recommend that you recharge your device at least once a year.
- Please reset the headset if it cannot work well.

Product Warranty Card

Customer Name		Product Model No.	
Date of Purchase		Tel No./E-mail:	
Problem Description:			
Microphone	Speaker	Battery	Buttons

Warranty:

Failure of headset buttons, speaker or microphone; charge unavailable.

Out of Warranty:

- Ear cushions broken.
- Fail to follow the user manual or disassemble the headset.
- Incorrect connection with high voltage device for charging which causes earphone damage.
- Artificial damage caused by impact, falling, water, pulling.

OQC CHECKING

