

PTC FAN HEATER

PE-HE001 User Manual

IMPORTANT SAFETY INSTRUCTIONS

BEFORE USING THIS APPLIANCE READ ALL INSTRUCTIONS AND CAUTIONARY MARKINGS IN YOUR USER MANUAL AND ON THE APPLIANCE

INTENDED USE

- This heater is not intended for use in bathroom, laundry areas and similar moist indoor locations. Never locate heater where it may fall into a bathtub or other water container.
- Use this heater only as described in this manual. Any other use not recommended by the manufacturer may cause fire, electric shock, or injury to persons.
- The output of this heater may vary and its temperature may become intense enough to burn exposed skin. Use of this heater is not recommended for persons with reduced sensitivity to heat or an inability to react to avoid burns.

ELECTRICAL SAFETY

- Do not run cord under carpeting. Do not cover cord with throw rugs, runners, or similar coverings. Do not route cord under furniture or appliances. Arrange cord away from traffic area and where it will not be tripped over.
- It is normal for the plug to feel warm to the touch; however, a loose fit between the AC outlet (receptacle) and plug may cause overheating and distortion of the plug. Contact a qualified electrician to replace loose or worn outlet.
- To disconnect the heater, first turn it off, then remove plug from outlet. Never pull by the cord.
- Always plug heaters directly into a wall outlet/receptacle. Never use with an extension cord or reloadable power tap (outlet/power strip).

RELATED TO USE


- This heater is hot when in use. To avoid burns, do not let bare skin touch hot surface. Keep combustible materials such as furniture, pillows, bedding, papers, clothes and curtains at least 3 feet (0.9m) from the front of the heater.
- Extreme caution is necessary when this heater is used by or near children or invalids and whenever the heater is left operating and unattended.
- Do not operate any heater with a damaged cord or plug or after the heater malfunctions, has been dropped or damaged in any manner. Discard heater or return heater to authorized service facility for examination, electrical or mechanical adjustment, or repair.
- Do not use the heater outdoors.
- To prevent a possible fire, do not block air intakes or exhausts in any manner.
- Do not use on soft surface, like a bed, where openings may become blocked.
- A heater has hot and arcing or sparking parts inside. Do not use it in the areas where gasoline, paint, or flammable liquids are used or stored.
- Do not insert or allow foreign objects to enter any ventilation or exhaust opening as this may cause an electric shock or fire, or damage the heater.
- Always unplug the heater when not in use.
- Never tamper with the heater or attempt to fix it. Any tampering with, or modification of this product can result in serious injury, death, or fire, risk of electric shock. Do Not open. No user serviceable parts inside.
- DO NOT remove product labels that contain warnings or safety instruction.
- Before cleaning, or storage, or when not in use, turn the heater off and unplug it.


READ ALL INSTRUCTIONS BEFORE USING THIS HEATER. SAVE THESE INSTRUCTIONS

Specifications

Input	120V~ 60Hz
Rated Power	1500W (High) 900W (Low)
Remote Control Battery	AAA 1.5V (not included)

Knowing Your Heater

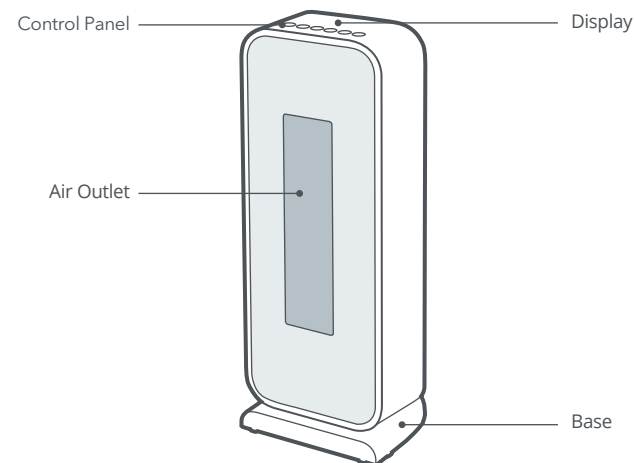

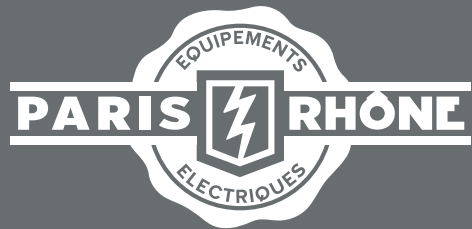

Using Your Humidifier



On/Off

Turn on/Standby mode. (Default: 95°F, HI Level)
After power off, the fan inside continues working for 15s to cool down the unit.



Mode

Cycle through High (HI), Low (LO), ECO modes.



Menu (on remote control)

Turn on/off ECO mode.



+/-

Adjust temperature (41-95°F).
Hold both buttons to switch temp format.
When it reaches the preset temperature, the heater will stop working. When it falls below the preset temperature, the heater will resume.



Oscillation

Start/stop oscillation.
Hold to cancel the auto display off function.



Timer

Set the timer for auto-off (0-12 h).
Hold to turn off the timer.

When ECO mode is turned on, the heater will adjust the working mode (High or Low) automatically based on the ambient temperature.

Place the heater on a firm, level surface free from obstructions, and at least 3 ft (90 cm) away from any wall or combustible material. Plug into an appropriate socket and it is ready for use.

Other Features

Memory Function

The heater always remembers your last settings once you turn it on again.

12-hour Auto Off

The heater shuts off automatically after continuous working for 12 hours.

Tip-over Protection

The heater shuts off automatically if it is tipped over.

Overheat Protection

The heater shuts off automatically if the ambient temperature is above 122°F.

Questions or Concerns?
support@parishhone.co



support@parishhone.co



www.parishhone.co



Manufacturer: Shenzhen NearbyExpress Technology Development Co.,Ltd.
Address: Floor 7, Building E, Galaxy World Phase II, Shenzhen, China

Rev_1.0-EN



Intertek
3066787
Made in China

尺寸:120*160mm

材质:128克铜版纸

折页