

Sevier Downlight Outdoor Wall

8438701, 8438751 | 1.1

GENERATION LIGHTING

WALL

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for wet locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.


SAVE THESE INSTRUCTIONS!

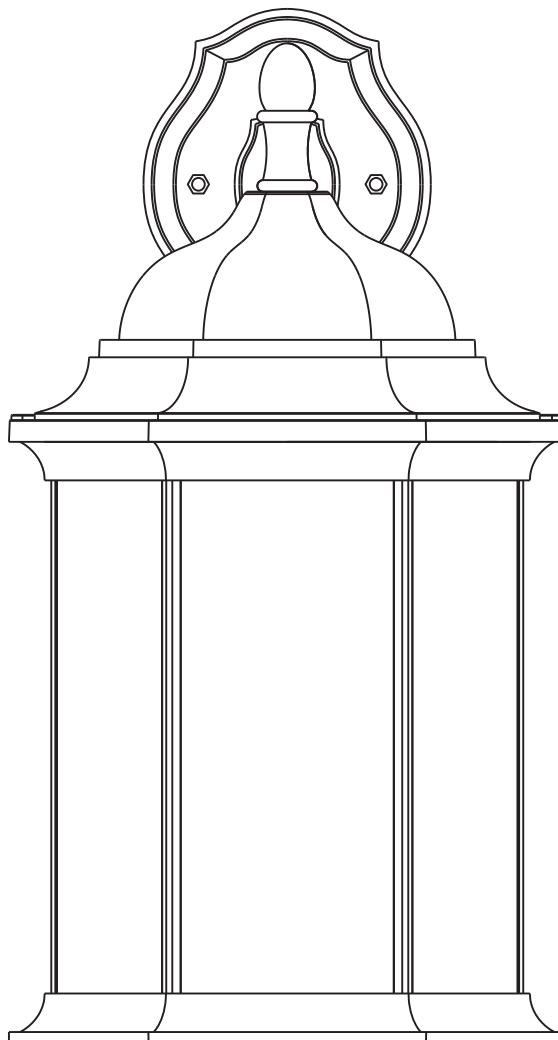

GENERATION LIGHTING
7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.generationlighting.com

Install the Fixture

1A

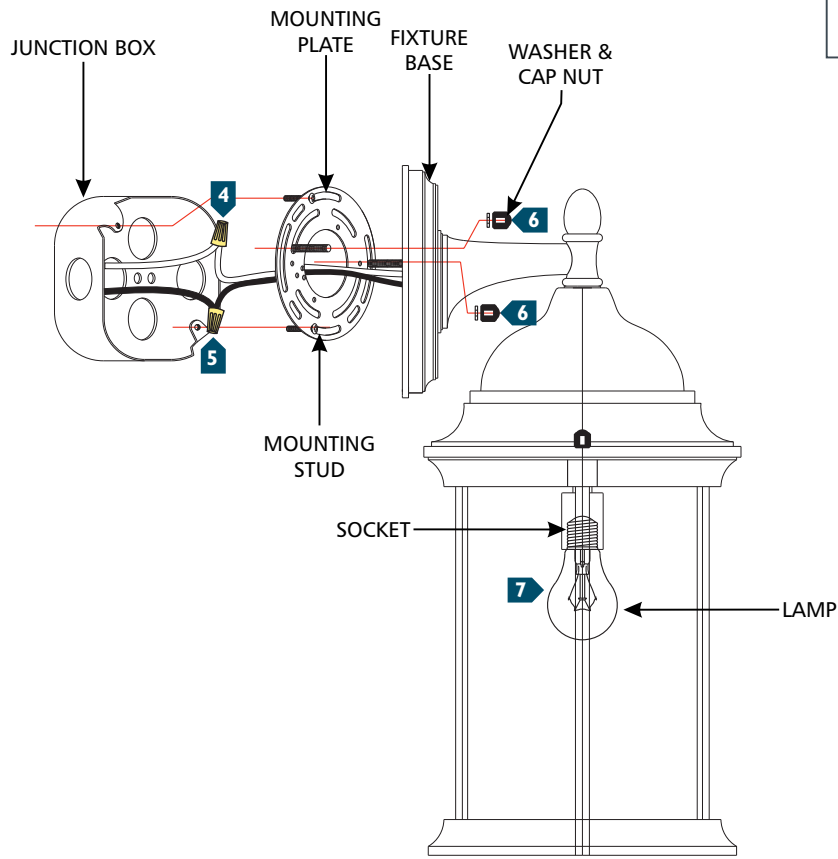

- 1 Secure the mounting plate to the junction box.
- 2 Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- 3 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 4 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 5 Connect the black fixture wire to the hot power line wire with a wire nut.
- 6 Align and place the fixture base onto the mounting studs, then secure it with the washers and cap nuts.
- 7 Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- 8 For wet locations, caulk around the base of the fixture with waterproof construction sealant.