

# INSTRUCTION MANUAL

使用說明 / 使用说明

---


**momax** *smart*

## Robust

IoT UV-C Air Purifier

IoT 智能紫外光負離子空氣淨化機

IoT 智能紫外光负离子空气净化机

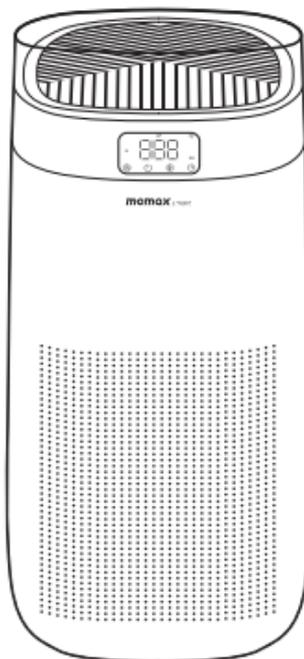

**AP8S**

**Introduction** p.2 - 23

**產品資料** p.24 - 44

**产品资料** p.45 - 65



## Introduction

### Before Using

1. Please make sure the electric power supply of your region meets the product's requirement.
2. Make sure there is no broken of the power cord and the product.
3. This product cannot replace daily air ventilation, dust collection, or use as a fume cupboard.
4. Do not use this appliance when you have used indoor smoke-type insect repellents or in places with oily residues, burning incense, or chemical fumes.
5. Leave at least 30cm of space around the product when using.
6. Do not place any items above the product.
7. Be sure to place and use the product on a firm, flat and horizontal surface.
8. Do not insert your fingers or objects into the air outlet or the air inlet to prevent physical injury or malfunctioning of the appliance.
9. Unplug the power connection before moving the machine.
10. This product is not waterproof.


## Quick Start Guide

**Before using, please remove the package of the filter.**

**Ensure the machine is unplugged before removing or installing the filter.**


**!** Power off before opening the cover

1. Remove filter cover on the back of the unit by pressing the switch in the filter cover.
2. Remove filter from its packing and replace it.
3. Close the filter cover.
4. Tap & hold the filter button for 7 secs to reset the filter timer after installing the new filter.

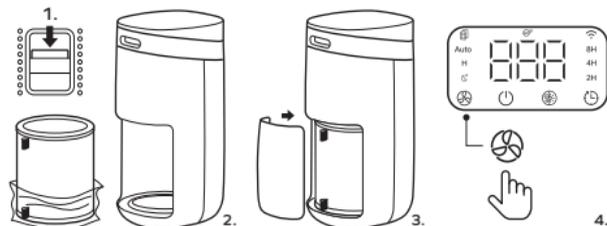

## 1. Download 'MOMAX Smart' APP

Search 'MOMAX Smart' app on iOS or Android or any platform.

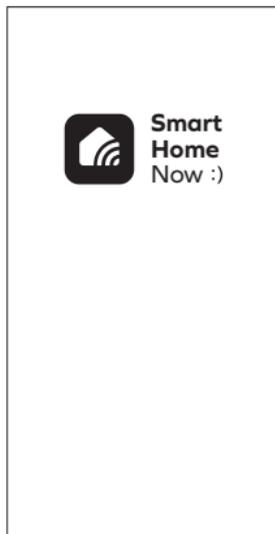

## 2. Register

Register an account and log in using your mobile number or email address.



The Home page of all connected devices.



To set scenarios or conditions and respective actions of the new smart device.



Profile management, FAQ, setting, etc.




### 3. Turn ON Wi-Fi & Bluetooth

Once Robust is power on, it is ready to pair your device through Bluetooth connection. Tap “+” in the app, you will see a pop up message “MOMAX Smart UVC ANION Air Purifier”. Tap “Go to add” and select the air purifier.

Tips:

- This product cannot be paired directly through the Bluetooth list of the mobile phone.
- The pairing process may take 2 minutes, please do not perform other operation.


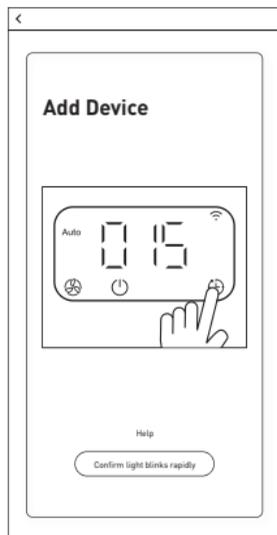


### 4. Connect to the Internet Wi-Fi

Tap ‘+’ at the upper right corner and enter Wi-Fi name and password to connect your home Wi-Fi.

Tips:

- 2.4GHz Wi-Fi network is required.
- Link to the Wi-Fi network again when the device is disconnected.

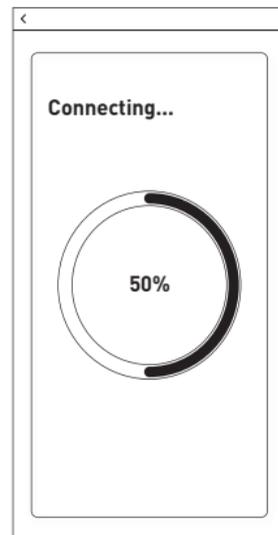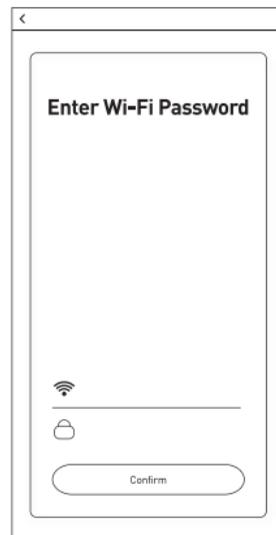

## 5. Successfully connected


Once the connection is completed. You will see "Wi-Fi" symbol appear on the LED screen.

You can edit the name of the device.

Tips: \*The device name should be identifiable and easy to pronounce (voice control).

## 6. Connect to a new Wi-Fi network


If you want to connect Robust to a new Wi-Fi network, tap & hold the  Wifi / Timer Button for 5 secs and follow steps 1-5.

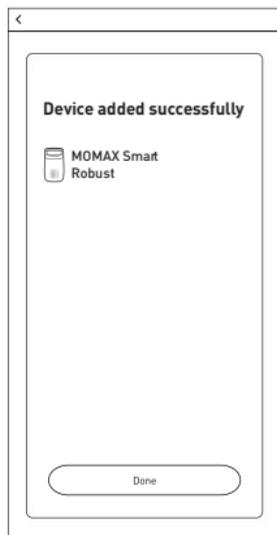


## Remote Control Page

You can control the ON/OFF, speed, UV-C, auto-off timer function etc. Moreover, this device can execute automatically according to conditions such as specific time, weather, etc. (allow access of your location is required).

Device App Control panel.

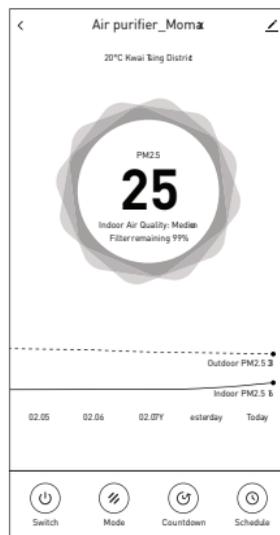


Auto Location Weather, Humidity.

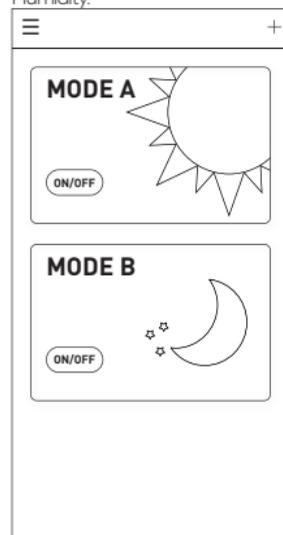

## Smart Home Ecology System

Adding Multiple Devices in interactive smart mode.

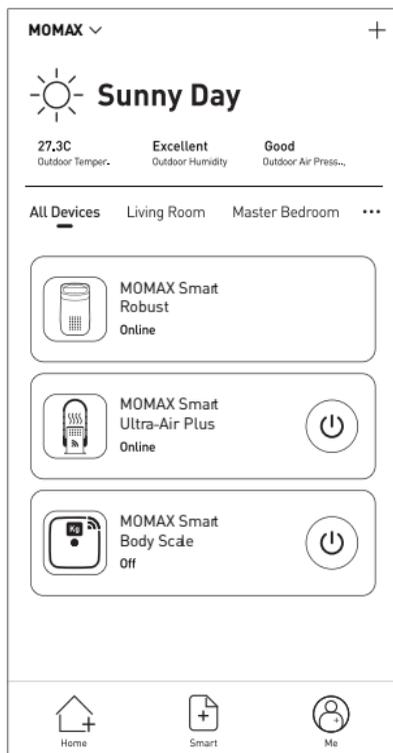

## Voice Control

This smart device supports voice control with Amazon Alexa, Google Assistant and other China platform, etc.) To connect with these platforms, please refer to the App>More Services>Voice Service. Voice commands of each platform may vary, please refer to the relevant user manual.

Turn on/off "Air purifier".



Turn on/off anion for the "Air purifier".

Set "Air purifier" to Auto.

Turn on/off UV for "Air purifier".



## Product Overview

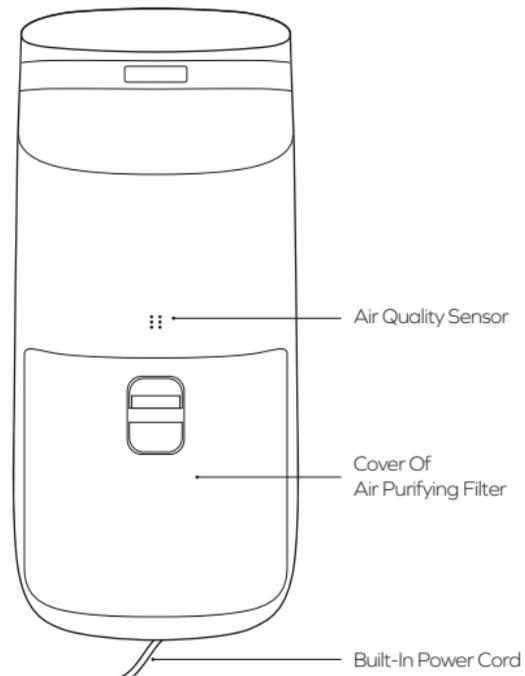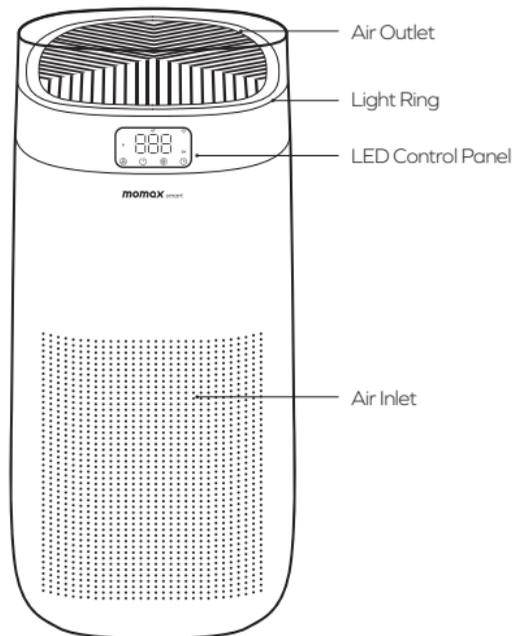

## LED Display



### BUTTON

	Wind Speed / Filter Button		Wifi / Timer Button
	Power Button		UV-C / Anion / Light Button

### FUNCTION

	Filter Replacement Reminder		Wifi Pairing Mode
Auto	Auto Mode	8H	8 Hour Auto-Off Timer
H	High Speed Mode	4H	4 Hour Auto-Off Timer
	Silent Night Mode	2H	2 Hour Auto-Off Timer
	UV / Anion Mode		

### PM 2.5 Concentration

Air Quality Index	Light Ring Color	Status
0-75	Blue	Good
75-150	Yellow	Moderate
>150	Red	Bad

## Maintenance

Ensure the machine is unplugged before maintenance.


### Surface

Use a lightly moistened soft cloth with neutral cleanser to clean the remote control and the surface of the unit.

### Filter

1. Use a vacuum cleaner or soft brush to clean the dust or debris of the air inlet / outlet.
2. Use a vacuum cleaner or soft brush to remove the dust on the H13 HEPA every 3 months. This will help extend the life of the filter and maintain its performance.


Note: Do not wash the filter directly.

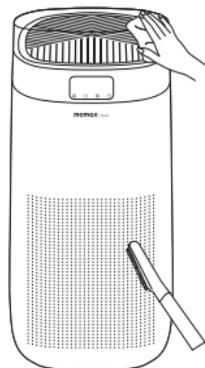

## Filter Replacement

This device has a memory function. After a total of 2200 hours of operation, you will see the filter icon flickers in red on the LED display. After filter maintenance, press & hold the Wind Speed / Filter Button “” for 7 secs to restart a new memory.

1. Remove filter cover on the back of the unit by pressing the switch in the filter cover.
2. Remove filter from its packing and replace it.
3. Close the filter cover.
4. Tap and hold the wind speed / filter button for 7 seconds to reset the unit after installing the new filter.

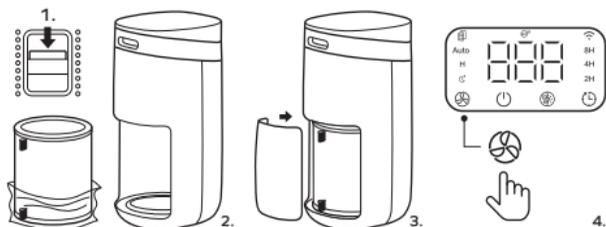

## About Filters and UV-C

	Structures	Active carbon filter
<b>H13 HEPA Filter</b>	Green mesh filter with very fine glass threads with a diameter of less than 1 micron (0.001mm)	<ul style="list-style-type: none"> <li>• Airborne particles of 0.3 micron</li> <li>• PM2.5 (fine particulate matter with size less than 2.5 microns)</li> <li>• Aerosols of 0,3 - 10 micron</li> <li>• Allergens (e.g. Dust mites, pollen, mold spore, etc.)</li> </ul>
<b>Active Carbon Filter</b>	Black hexagonal honeycomb filter with a bed of active carbon with antibacterial coating	<ul style="list-style-type: none"> <li>• VOCs</li> <li>• Unwanted air odors (smoke, pet, common household chemicals etc.)</li> </ul>
<b>UV-C</b>	LED UV-C Light	Kills or inactivates the airborne infectious particles (e.g. germs, mold spore, etc.) that circulate throughout the space.

## Trouble Shooting

Problem	Possible cause and solution
The air purifier does not work	<ul style="list-style-type: none"> <li>• Make sure both ends of the power adapter and the power socket are in good contact.</li> <li>• Please check if the “ <p>Note: Contact our customer service to arrange maintenance. Do not disassemble the product.</p> </li></ul>

## Specification

Model No.	: AP8S
Operating Voltage / Frequency	: 100-240V 50/60Hz
Rated Voltage / Frequency	: 220V±10% ~50Hz
Power	: 50W
Effective Area	: up to 40m <sup>3</sup>
CADR	: 298m <sup>3</sup> /Hr
Filter Type	: H13 HEPA & Active Carbon (with antibacterial coating)
Filter Life Cycle	: 2200 Hrs
UV-C Lifecycle	: 10000 Hrs
Modes	: Auto / High Speed / Silent Night Mode
Auto-off Timer	: 2Hrs / 4Hrs / 8Hrs
Size	: 270 x 303 x 562mm
Cable Length	: 1.8-2m
Weight	: 4.25kg
Wireless WiFi Frequency	: 2.402GHz - 2.480GHz
Wireless WiFi Distance	: 10m
Bluetooth	: Yes

### Contains

1. Robust IoT UV-C Air Purifier
2. H13 HEPA & Active Carbon Filter
3. Instruction Manual And Warranty Card

## Warnings

### Points for attention

Before using, please read this user manual carefully and keep it for future reference.

1. To avoid electric shock and fire, do not allow water, liquid or any flammable detergent to get into or to clean the product.
2. Do not spray insecticide, perfume or other flammable sprays around the product.
3. Before connecting the power supply, please check whether the voltage of the product is consistent with the local power supply voltage.
4. This product cannot replace daily air ventilation, dust collection, or use as a fume cupboard.
5. Ensure the product is used and kept in a well-ventilated area.
6. Leave at least 30cm of space on the back and sides of the product, and at least 50cm of space above the product when using.
7. Ensure both the filter and its cover are properly installed before using.
8. Do not insert a finger or other things into the air outlet / inlet to prevent physical damage or trouble.
9. Do not place the machine near a heating device such as a stove or heater.
10. Do not attempt to repair, disassemble or modify this machine.
11. Please only use the correct local AC power outlet of the power supply. Before connecting the product to the power supply, first, verify that the voltage marked on the back or bottom of the product matches the local voltage.
12. Remove the dust from the power plug and insert it all the way. If the power cord or plug is damaged or found defective, to avoid danger, it must be replaced by a professional from the manufacturer or maintenance department.
13. When an abnormality occurs (such as a burning smell, overheat, etc.), turn off the machine and unplug the power cord.
14. Do not cover the air inlet with clothing, cloth strips, curtains, etc. Do not block the inlet and air outlet, for example, do not place objects on or in front of the air outlet.
15. Do not use the machine in the bathroom or other places where it may come into contact with water, or wash the machine with water.
16. Do not use this unit in a location where it may be exposed to direct sunlight or wind and rain.
17. Do not place in places where chemicals are used or where oil or flammable gas may leak such as hospitals, factories, or laboratories.
18. When using for a long time without supervision, please check it every 2 weeks.
19. Do not allow the machine to tip over, and do not drop the machine horizontally to carry it.
20. Make sure to leave a certain amount of space around the machine. 30cm less space and at least 50cm above. Insufficient ventilation may cause overheating or fire hazards.
21. Hold the plug when pulling out the power plug.
22. This product is only for domestic use.

## Service Agreement of Smart Mobile Application Platform

Please reference Mobile Apps content: Before accepting the Agreement, you are supposed to thoroughly read all the contents of the Agreement, and fully understand its terms, especially restrictive clauses or exceptions and Privacy Notice. Restrictive clauses or exceptions are bold or highlighted in other forms to catch your attention. In case of any doubt about the terms of the Agreement, please contact the relevant business department of Tuya. You are not allowed to use the service before you have read and accepted all the terms of the Agreement, relevant agreements, and rules, etc. Once you select "agree and submit the Agreement" (see registration page for detailed wordings) and complete the registration procedure, or you use the service in any form, it will be deemed that you have read and agreed with the restriction of the Agreement and rules above. In case of any breach of the Agreement, Tuya has the right to unilaterally restrict, suspend or terminate the service for you, and has the right to investigate your relevant responsibilities.

## Disposal of Electronic Products

1. Do not place the product as household waste;
2. Please dispose of discarded electronic products properly according to local regulations;
3. MOMAX encourages you to participate in the electronic recycling program.

## Warranty Conditions

1. For any defect, in the judgment of our technician, caused under normal use, we are responsible for repairing free of charge 12 months commencing from the date of purchase at the discretion of our company;
2. A valid warranty card and original purchase invoice must be presented upon request of warranty service;
3. This warranty card shall not apply to the product if:
  - (a) It is consumable part(s), such as Filter, or;
  - (b) it has explicitly modified or repaired in any way by persons other than technicians of this company, or;
  - (c) it has been damaged through misuse, malicious acts, negligence, the inflow of any liquid, or;
  - (d) losses or damages are caused by force majeure or natural disasters.
4. No alteration to this warranty card will be allowed;
5. The warranty terms and conditions are subject to change without prior notice;
6. Please retain your proof of purchase for warranty service;
7. Please consult the dealer about the product compatibility with your cell phone/ PDA before purchase. Product specifications are subject to change without prior notice;
8. Please visit [www.momax.net](http://www.momax.net) for the latest product information.

## 使用之前


1. 請確保您所在地區的電源符合產品要求。
2. 確保電源線和產品沒有破損。
3. 本產品不能代替日常通風，除塵或用作抽風機。
4. 當您使用室內煙霧驅蟲劑或在有油性殘留物，燃燒的香火或化學煙霧的地方時，請勿使用本產品。
5. 使用時，在產品周圍至少留出30cm的空間。
6. 請勿在產品上方放置任何物品。
7. 確保將產品放在堅固，平坦和水平的表面上使用。
8. 請勿將手指或其他物體插入出風口或入氣口，以免造成人身傷害或設備故障。
9. 移動機器之前，請拔下電源插頭。
10. 本產品不防水。

## 快速入門指南

在使用前，請先移除濾網的包裝。在卸下或安裝過濾網之前，請確保拔下電源插頭。


❗ 打開蓋前，請先關掉電源。

1. 按下按鍵打開過濾網蓋，拿出過濾網。
2. 從袋子取出過濾網，安裝到主體內。
3. 蓋上過濾網蓋。
4. 安裝新濾網後，長按濾網/風速按鈕7秒，以重新設定濾網計時器。

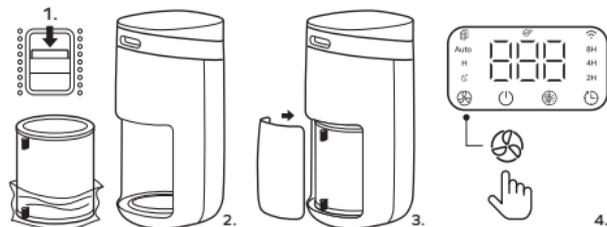

## 1. 下載“MOMAX Smart”應用程式

在iOS或Android或任何平台上搜索“MOMAX Smart”應用程式。

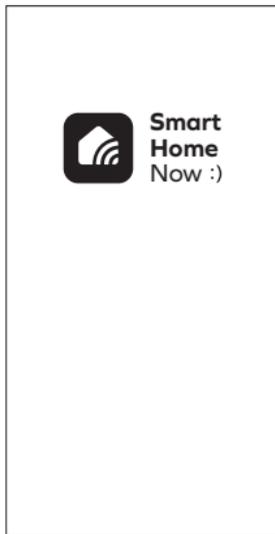

## 2. 註冊

註冊一個帳戶，然後使用您的手機號碼或電子郵件地址登錄。





主頁將會連接所有設備。



可設定智能設備特定條件下、執行指定操作。



個人資料管理，常見問題解答，設置等。

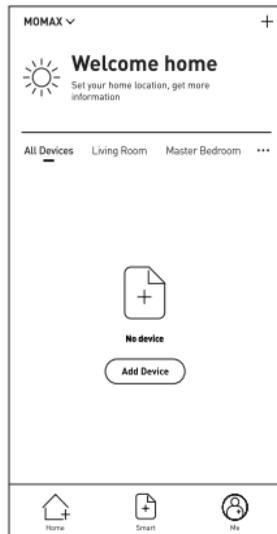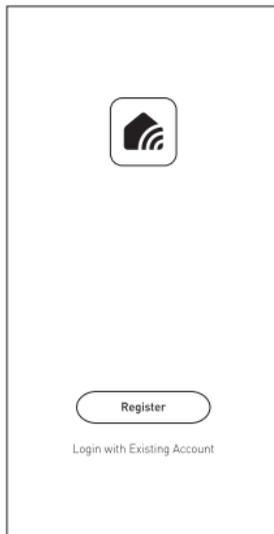


### 3. 開啟 Wi-Fi 和 藍牙

當Robust 啟動後，即可進入藍牙配對模式。

在應用程式按“+” (添加設備)，你會看到“發現待添加設備 MOMAX智能UVC負離子空氣淨化器”的彈出訊息。按“去添加”並選擇空氣淨化器。

提示：

- 不能透過手機的藍牙清單直接配對本產品。
- 搜索過程可能需要兩分鐘。請在此期間不要執行任何操作。


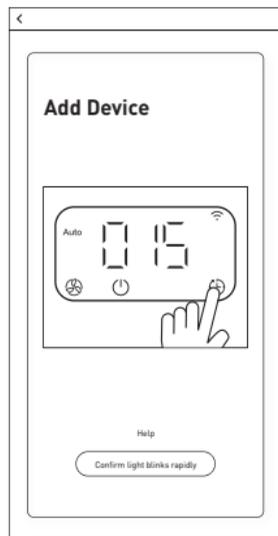


### 4. 連接到互聯網Wi-Fi

按右上角的“+”，輸入Wi-Fi名稱和密碼以進行Wi-Fi 連接。智能設備將開始通過Wi-Fi網絡連接到您的設備。

提示：

- 需要穩定的2.4GHz Wi-Fi 網絡。
- 如Wi-Fi 斷開連接，請重覆以上步驟回連。

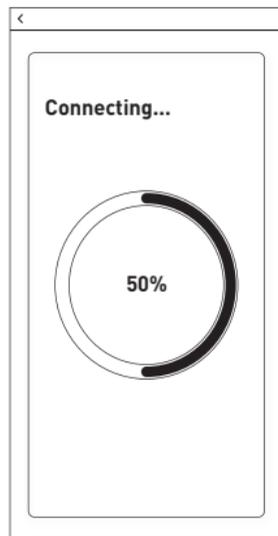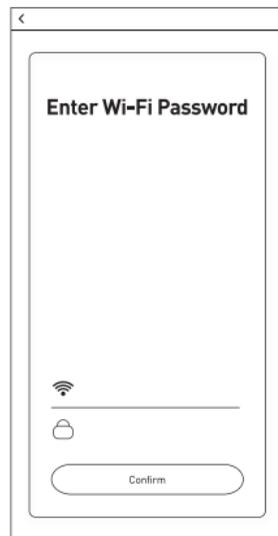

## 5. 成功連接


連接完成後。您可以在LED顯示屏上看到“Wi-Fi”符號。

您可以編輯設備的名稱。

提示：\*設備名稱應易於識別且易於發音（語音控制）。

## 6. 連接新的Wi-Fi網絡


如果你想連接新的 Wi-Fi 網絡，按住 “🕒” WiFi/定時按鈕5 秒鐘，再進行步驟1-5。

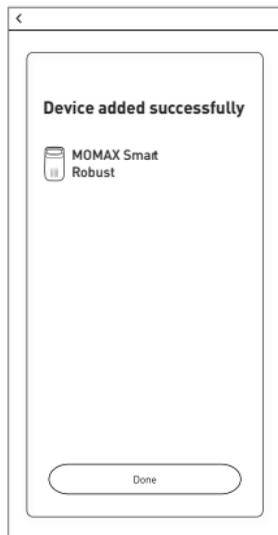


## 控制設備版面

您可以使用應用程式控制開/關、風速、紫外光、自動定時關機功能等。此外，亦可以根據特定時間，天氣等條件自動執行你的預設模式（須允許所在地區存取權，以獲取地區天氣數據）。

控制面板

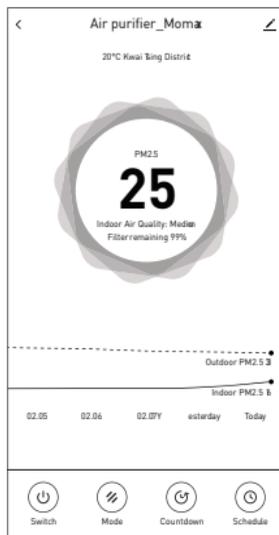


自動定位天氣、濕度

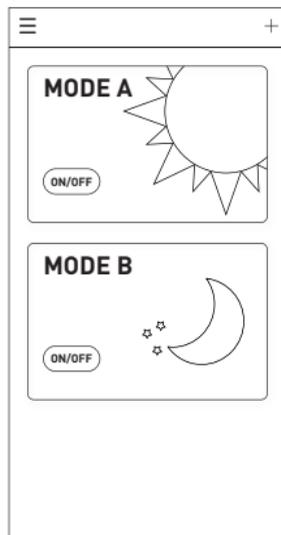

## 智能家居生態系統

添加多個設備的互動智能模式

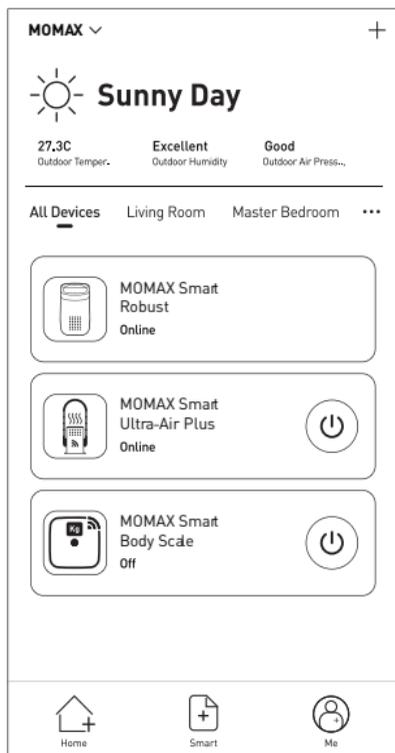

## 語音控制

此智能設備支持使用Amazon Alexa、Google Assistant及中國內地等平台進行語音控制。要連接這些平台，請參閱App>更多服務>語音服務。

每個平台的語音指令可能略有所差異，請參閱相關的用戶手冊。

打開/關閉淨化機



打開/關閉淨化機的負離子

將暖風溫度設置為自動

打開/關閉淨化機的UV



## 產品總覽

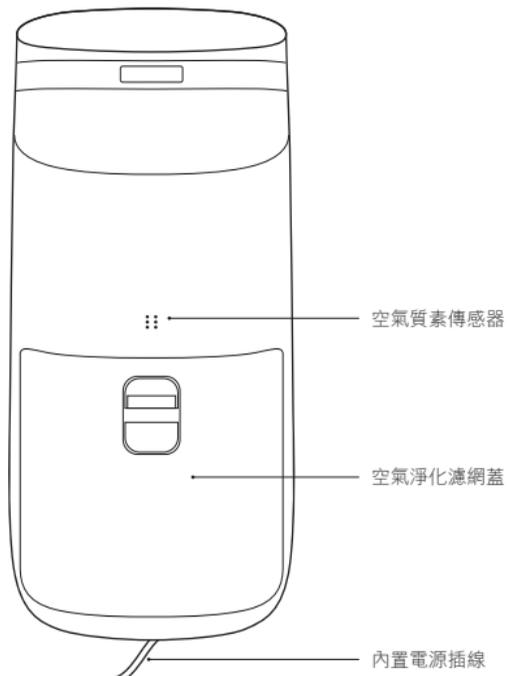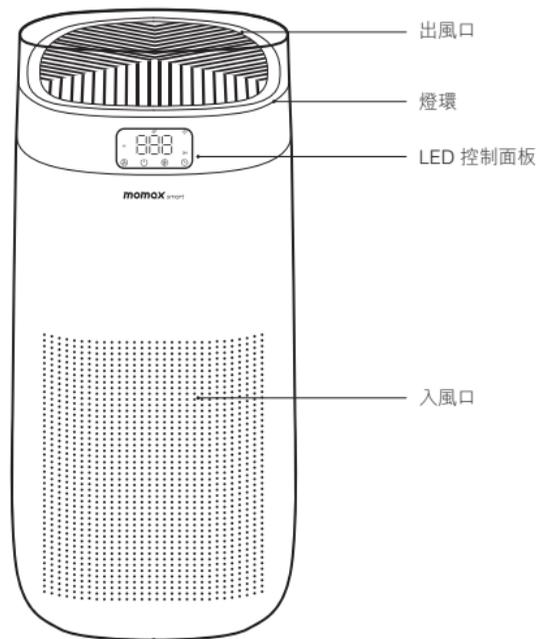

## LED 顯示屏



### 按鈕

	風速/濾網按鈕		WiFi/定時按鈕
	電源按鈕		紫外光/負離子/燈環按鈕

### 功能

	濾網更換提示		WiFi 配對模式
Auto	自動模式	8H	8 小時定期關機功能
H	強力模式	4H	4 小時定期關機功能
	晚間靜音模式	2H	2 小時定期關機功能
	紫外光/負離子模式		

### PM2.5 濃度

空氣質素指數	燈環顏色	狀態
0-75	藍	良好
75-150	黃色	中度
>150	紅色	差

## 保養

保養前，請確保拔除電源插頭。


### 表面

使用蘸有中性清潔劑的微濕布輕擦遙控器和產品表面。

### 濾網

1. 使用吸塵機或軟毛刷清潔入氣口及出風口的灰塵或碎屑。
2. 每3個月，建議使用吸塵器或軟刷清除H13 HEPA濾網上的灰塵和放在陽光下。這將有助延長過濾網的使用壽命及性能。


注意: 請勿使用水直接清洗濾網。

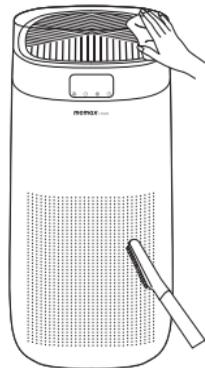

## 濾網更換

本產品具有記憶功能。當運行2200小時之後，您將在LED顯示屏上看到濾器網圖示閃爍紅色。保養/更換濾網後，按住風速/濾網按鈕“”7秒鐘以重設記憶。

1. 按下按鍵打開過濾網蓋，拿出過濾網。
2. 從袋子取出過濾網，安裝到主體內。
3. 蓋上過濾網蓋。
4. 更換新過濾網後，長按風速/濾網按鈕“”7秒，從新設定過濾網使用時間。

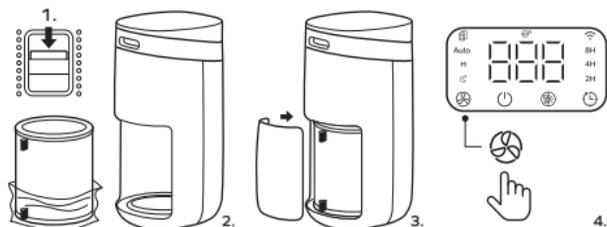

## 關於濾網及UV-C紫外光

	結構	常見用途
H13 HEPA 濾網	綠色網狀過濾網，具有非常細的玻璃纖維，直徑小於1微米（0.001毫米）	<ul style="list-style-type: none"><li>• 0.3微米的空氣傳播顆粒</li><li>• PM2.5（尺寸小於2.5微米的細顆粒物）</li><li>• 0.3 - 10微米的氣溶膠</li><li>• 致敏原（例如塵蟎、花粉、黴菌孢子等）</li></ul>
活性炭濾網	帶活性炭的黑色六角形蜂窩狀過濾網	<ul style="list-style-type: none"><li>• 揮發性有機化合物</li><li>• 有害的氣味（煙、動物、常見的家用化學品等）</li></ul>
UV-C 紫外光	紫外光燈	在限定範圍內，殺死或減弱經空氣傳播的傳染性顆粒（例如，細菌，黴菌孢子等）。

## 疑難排解

問題	可能原因及解決辦法
空氣淨化器不運作	<ul style="list-style-type: none"><li>• 確保電源适配器的兩端與電源插座接觸良好。</li><li>• 請檢查“<p>注意：請聯繫我們的客戶服務以安排維護。請勿自行拆卸本產品。</p></li></ul>

## 產品規格

型號	: AP8S
操作電壓/頻率	: 100-240V 50/60Hz
額定電壓/頻率	: 220V±10% ~50Hz
功率	: 50W
適用面積	: 可達 40m <sup>3</sup>
空氣潔淨量	: 298m <sup>3</sup> /小時
濾芯種類	: H13 HEPA及活性炭(帶抗菌塗層)
濾芯壽命	: 2200 小時
紫外光燈壽命	: 10000 小時
模式	: 自動 / 高風量 / 夜間靜音模式
自動關機定時器	: 2 / 4 / 8 小時
尺寸	: 270 x 303 x 562mm
線長	: 1.8-2m
重量	: 4.25kg
無線頻率	: 2.402GHz - 2.480GHz
無線距離	: 10m
藍牙	: 支援

## 包裝內容

1. Robust IoT 智能紫外光負離子空氣淨化機
2. H13 HEPA及活性炭濾網
3. 使用說明書及保用證

## 注意事項

使用前，請仔細閱讀本用戶手冊，並妥善保存以備將來參考。

1. 為避免觸電和火災，請勿讓水、液體或任何易燃清潔劑進入或清潔產品。
2. 請勿在產品周圍噴灑殺蟲劑、香水或其他易燃噴霧劑。
3. 連接電源之前，請檢查產品電壓是否與當地電源電壓一致。
4. 本產品不能替代日常通風，日常除塵或用作抽風櫥。
5. 確保使用本產品並將其放在通風良好的地方。
6. 使用時，請在產品的背面和側面至少留出30厘米的空間。
7. 使用前，請確保濾網及其蓋子均已正確安裝。
8. 請勿將手指或其他物品插入出風口/入氣口，以免造成人身傷害或其他損壞。
9. 請勿將機器放置在爐子或加熱器等加熱裝置附近。
10. 請勿嘗試修理、拆卸或改裝本機。
11. 請使用當地交流電源插座。將產品連接到電源之前，請確認產品機身註明標的電壓與本地電壓匹配。
12. 清除電源插頭上的灰塵，並確保完全插入電源插座。如果電源線或插頭損壞或不能正常使用，為避免危險，必須由製造商或保修部的專業人員進行更換。
13. 發生異常情況時（例如，有燒溶的氣味、過熱等），請關閉機器並移除電源。
14. 請勿用衣服、布條、窗簾等遮蓋入氣口。請勿阻塞入氣口和出風口，例如，請勿在出風口上或前面放置物品。
15. 請勿在浴室或其他可能與水接觸的地方使用機器，或用水沖洗機器。
16. 請勿在陽光直射，風吹雨淋的地方使用本機。
17. 請勿在醫院、工廠或實驗室等使用化學藥品或易漏油或易燃氣體的地方放置。

18. 如果長時間無人使用，請每2週檢查一次。
19. 請勿讓機器傾翻，也不要將機器水平放下以搬運機器。
20. 確保在機器周圍留出一定的空間。四周30厘米的空間。通風不足可能會導致過熱或火災風險。
21. 拔出電源插頭時，請握住插頭。
22. 此產品僅供一般家居使用。

## 智能移動應用平台服務協議

請參考移動應用程式內容：在接受本協議之前請您務必仔細閱讀本協議的移動應用程式全部內容，充分理解條款內容，特別是限制及免責條款。限製或免除責任條款，私隱聲明，將以加粗或其他醒目形式提示您注意。如果您對本協議的條款有疑問的，請聯繫相關業務部門進行詢問。除非您已閱讀並接受本協議及相關協議、規則等所有條款，否則，您無權使用本服務。一旦您選“同意協議並提交”（具體措辭詳見註冊頁面）並完成註冊流程，或您以任何方式使用本服務，即視為您已閱讀並同意上述協議、規則等的約束。如您有違反本協議的任何行為時，智能生活有權根據您違反的情況隨時單方採取限制、中止或終止向您提供服務等措施，並有權追究您相關責任。

## 如何處理廢棄電子產品

1. 請勿將電子產品當成家庭廢棄物丟棄；
2. 請依當地的法例規定處理廢棄的電子產品；
3. MOMAX鼓勵您積極參與電子產品回收計劃。

## 保養條款

1. 由購買日期起12個月內，如產品有損壞或故障，經本公司技術人員證實為在正常使用之情況下發生，本公司將提供免費維修服務；
2. 維修時必須出示本保用證及購買商號之發票正本，如果用戶不能提供，本公司有權不提供維修服務。用戶可能需要支付相關維修費用；
3. 保用期內，出現以下條款產品保用證自動失效：
  - (a) 是可消耗的部件，例如過濾網；
  - (b) 非本公司人員恣意拆解或維修產品之任何部分；
  - (c) 錯誤的操作如：非法接駁電源，以及水、污穢物滲入產品內導致產品損；
  - (d) 不可抗拒意外事件或天然災害導致產品損壞；
4. 此保用證如經塗改，保用證自動失效；
5. 本公司有權增刪任何維修及保用條款而不作通知；
6. 如因錯誤使用本公司產品而導致手提電話或其他電子產品有任何損壞，本公司不會承擔任何責任；
7. 有關 MOMAX 原裝產品和您的手機或電子產品的相容性，請在購買時向經銷商確認。此產品規格隨時可能變更，恕不另行通告；
8. 請瀏覽 [www.momax.net](http://www.momax.net) 瞭解最新產品資訊。

## 使用之前


1. 請確保您所在地區的電源符合產品要求。
2. 確保電源線和產品沒有破損。
3. 本產品不能代替日常通風，除塵或用作抽風機。
4. 當您使用室內煙霧驅蟲劑或在有油性殘留物，燃燒的香火或化學煙霧的地方時，請勿使用本產品。
5. 使用時，在產品周圍至少留出30cm的空間。
6. 請勿在產品上方放置任何物品。
7. 確保將產品放在堅固，平坦和水平的表面上使用。
8. 請勿將手指或其他物體插入出風口或入氣口，以免造成人身傷害或設備故障。
9. 移動機器之前，請拔下電源插頭。
10. 本產品不防水。

## 快速入门指南

在使用前，请先移除滤网的包装。在卸下或安装过滤器之前，请确保拔下电源插头。

❗ 打开盖前，请先关掉电源。

1. 按下按钮打开过滤网盖，拿出过滤网。
2. 从袋子取出过滤网，安装到主体内。
3. 盖上过滤网盖。
4. 安装新滤网后，长按滤网/风速按钮7秒，以重新设定滤网计时器。

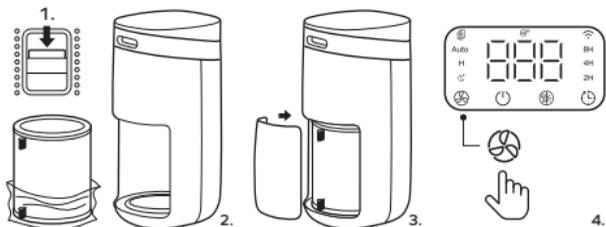

## 1. 下载“MOMAX Smart”应用程序

在iOS或Android或任何平台上搜索“MOMAX Smart”应用程序。



MOMAX Smart



Smart  
Home  
Now :)


## 2. 注册

注册一个帐户，然后使用您的手机号码或电子邮件地址登录。

 主页将会连接所有设备。

 可设定智能设备特定条件下、执行指定操作。

 个人资料管理，常见问题解答，设置等。

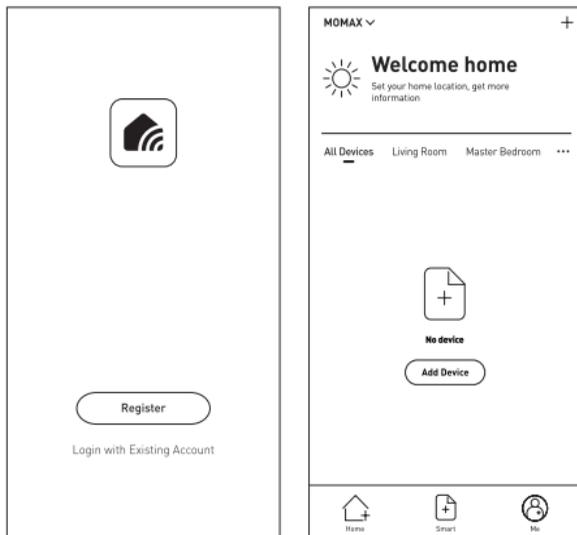


## 3. 开启 Wi-Fi 和蓝牙

当Robust 启动后，即可进入蓝牙配对模式。

在应用程式按“+” (添加设备)，你会看到“发现待添加设备 MOMAX智能UVC负离子空气净化器”的弹出讯息。按“去添加”并选择空气净化器。

提示：

- 不能透过手机的蓝牙清单直接配对本产品。
- 搜索过程可能需要两分钟。请在此期间不要执行任何操作。

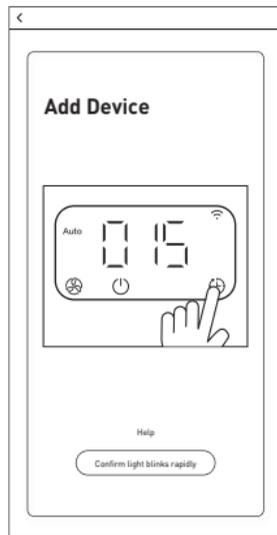


#### 4. 连接到互联网Wi-Fi

按右上角的“+”，输入Wi-Fi名称和密码以进行Wi-Fi连接。智能设备将开始通过Wi-Fi网络连接到您的设备。

提示：

- 需要稳定的2.4GHz Wi-Fi网络。
- 如Wi-Fi断开连接，请重复以上步骤回连。

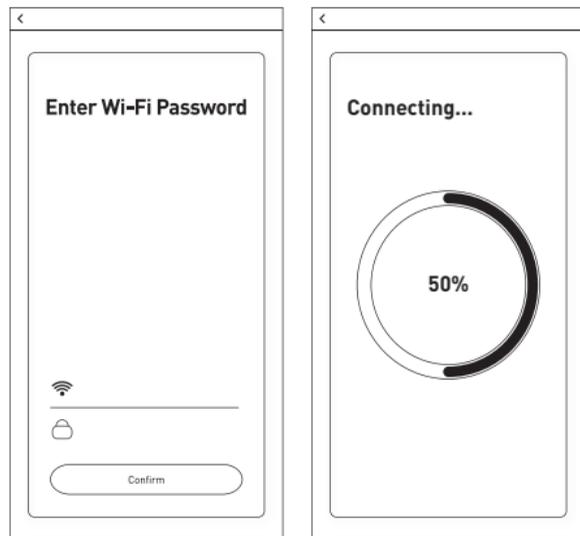

#### 5. 成功连接


连接完成后。您可以在LED显示屏上看到“Wi-Fi”符号。

您可以编辑设备的名称。

提示：\*设备名称应易于识别且易于发音（语音控制）。

#### 6. 连接新的Wi-Fi网络


如果你想连接新的Wi-Fi网络，按住“🕒”WiFi/定时按钮5秒钟，再进行步骤1-5。

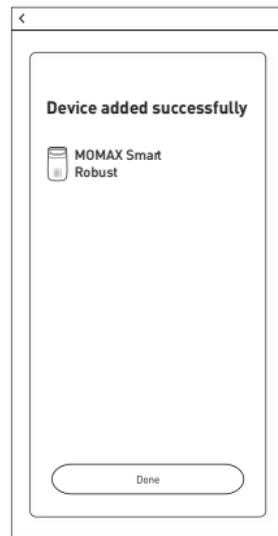


## 控制设备版面

您可以使用应用程序控制开/关、风速、紫外光、自动定时关机功能等。此外，亦可以根据特定时间、天气等条件自动执行你的预设模式（须允许所在地区存取权，以获取地区天气数据）。

控制面板

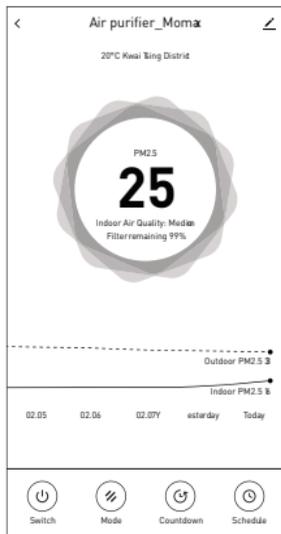


自动定位天气、湿度

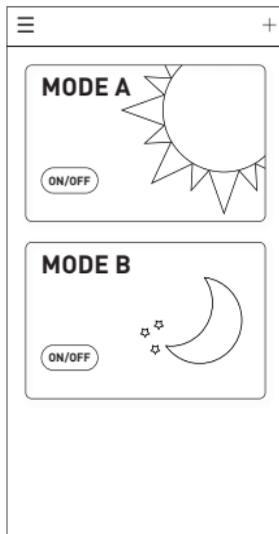

## 智能家居生态系统

添加多个设备的互动智能模式

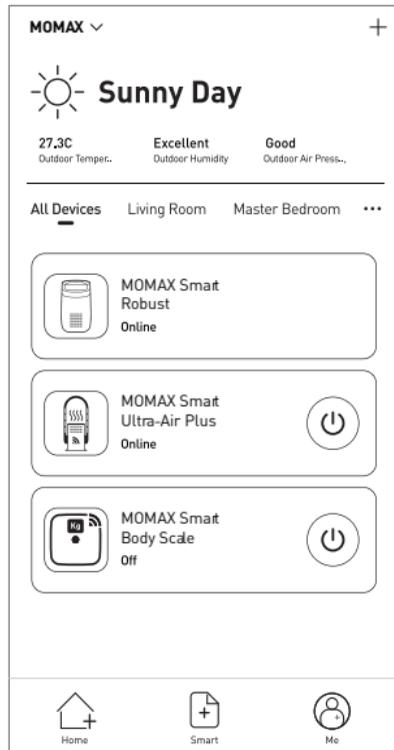

## 语音控制

此智能设备支持使用Amazon Alexa、Google Assistant及中国内地等平台进行语音控制。要连接这些平台，请参阅App>更多服务>语音服务。

每个平台的语音指令可能略有所差异，请参阅相关的用户手册。

打开/关闭净化机

打开/关闭净化机的负离子

将暖风温度设置为自动


打开/关闭净化机的UV




Rokid




## 产品总览

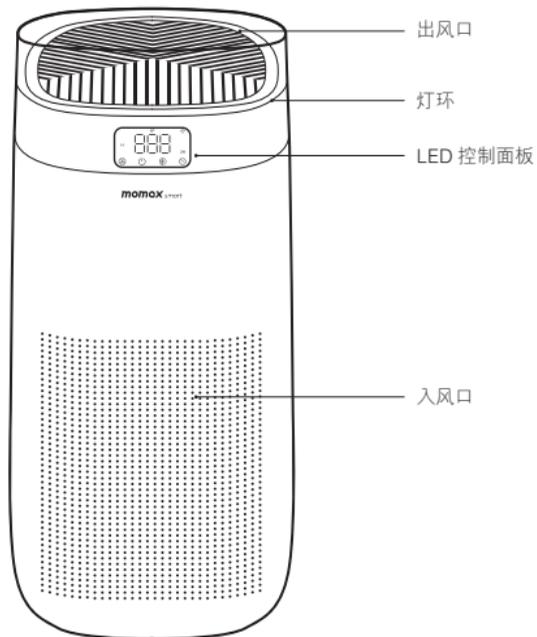

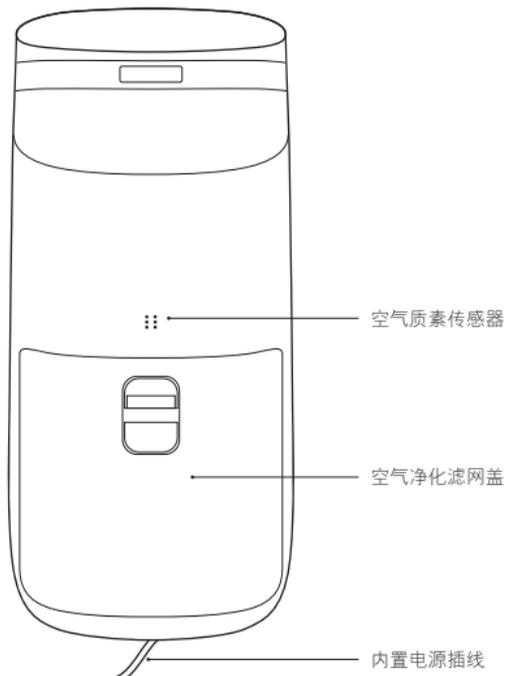

## LED 显示屏

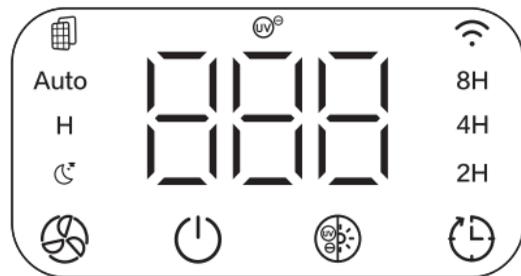

### 按钮

	风速/滤网按钮		WiFi/定时按钮
	电源按钮		紫外线/负离子/灯环按钮

### 功能

	滤网更换提示		WiFi 配对模式
Auto	自动模式	8H	8 小时定期关机功能
H	强力模式	4H	4 小时定期关机功能
☾	晚间静音模式	2H	2 小时定期关机功能
UV <sup>®</sup>	紫外线/负离子模式		

## PM2.5 浓度

空气质量指数	灯环颜色	状态
0-75	蓝	良好
75-150	黄色	中度
>150	红色	差

## 保养

保养前，请确保拔除电源插头。


### 表面

使用蘸有中性清洁剂的微湿布轻擦遥控器和产品表面。

### 滤网

1. 使用吸尘器或软毛刷清洁进气口及出风口的灰尘或碎屑。
2. 每3个月，建议使用吸尘器或软刷清除H13 HEPA滤网上的灰尘和放在阳光下。这将有助延长过滤网的使用寿命及性能。


注意: 请勿使用水直接清洗滤网。

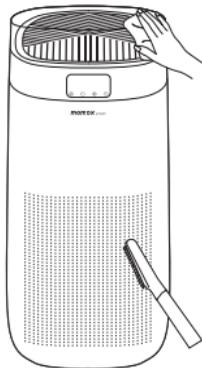

## 滤网更换

本产品具有记忆功能。当运行2200小时之后，您将在LED显示屏上看到滤器网图示闪烁红色。保养/更换滤网后，按住风速/滤网按钮“”7秒钟以重设记忆。

1. 按下按键打开过滤网盖，拿出过滤网。
2. 从袋子取出过滤网，安装到主体内。
3. 盖上过滤网盖。
4. 更换新过滤网后，长按风速/滤网按钮“”7秒，从新设定过滤网使用时间。

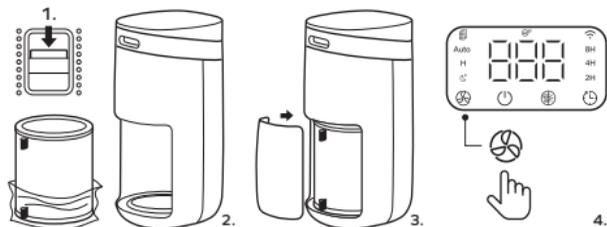

## 关于滤网及UV-C紫外光

	结构	常见用途
H13 HEPA 滤网	绿色网状过滤网，具有非常细的玻璃纤维，直径小于1微米（0.001毫米）	<ul style="list-style-type: none"> <li>• 0.3微米的空气传播颗粒</li> <li>• PM2.5（尺寸小于2.5微米 的细颗粒物）</li> <li>• 0.3 - 10微米的气溶胶</li> <li>• 致敏原（例如尘螨、花粉、霉菌孢子等）</li> </ul>
活性炭滤网	带活性炭的黑色六角形蜂窝状过滤网	<ul style="list-style-type: none"> <li>• 挥发性有机化合物</li> <li>• 有害的气味（烟、动物、常见的家用化学品等）</li> </ul>
UV-C 紫外光	紫外光灯	在限定范围内，杀死或减弱经空气传播的传染性颗粒（例如，细菌，霉菌孢子等）。

## 疑难排解

问题	可能原因及解决办法
空气净化器不运作	<ul style="list-style-type: none"> <li>• 确保电源适配器的两端与电源插座接触良好。</li> <li>• 请检查“”是否闪烁。如是，请清洁/更换过滤器并重置过滤器计时器。</li> </ul>
无法连接到Momax Smart应用程序	<ul style="list-style-type: none"> <li>• 确保选择2.4GHz Wi-Fi网络。</li> <li>• 检查Wi-Fi密码是否正确。</li> <li>• 确保设备上的蓝牙已打开。</li> </ul>
使用中出現异常噪音	<ul style="list-style-type: none"> <li>• 确保空气净化器放置在平坦而坚固的表面上。</li> <li>• 请检查出风口是否被任何异物堵塞。在这种情况下，请关闭空气净化器并取出物体。</li> </ul>
难闻的气味	<ul style="list-style-type: none"> <li>• 如果您的全新空气净化器在运行的最初几天内产生塑料气味，这是正常现象，塑料味最终会消散。（这是因为包装盒保留了塑料烟气的的气味。）</li> <li>• 闻到烧焦的气味，请从电源上拔下空气净化器。</li> <li>• 清洁空气净化器或更换新的过滤器。</li> </ul>
更换过滤器后，“  ”仍然闪烁	<ul style="list-style-type: none"> <li>• 确保按住风速（滤网重设按钮）“”按钮7秒钟，以重置滤网计时器。</li> </ul>

注意：请联系我们的客户服务以安排维护。请勿自行拆卸本产品。

## 产品规格

型号	: AP8S
操作电压/频率	: 100-240V 50/60Hz
额定电压/频率	: 220V $\pm$ 10% ~50Hz
功率	: 50W
适用面积	: 可达 40m <sup>3</sup>
空气洁净量	: 298m <sup>3</sup> /小时
滤芯种类	: H13 HEPA及活性炭(带抗菌涂层)
滤芯寿命	: 2200 小时
紫外光灯寿命	: 10000 小时
模式	: 自动 / 高风量 / 夜间静音模式
自动关机定时器	: 2 / 4 / 8 小时
尺寸	: 270 x 303 x 562mm
线长	: 1.8-2m
重量	: 4.25kg
无线频率	: 2.402GHz - 2.480GHz
无线距离	: 10m
蓝牙	: 支援

## 包装内容

1. Robust IoT 智能紫外光负离子空气净化器
2. H13 HEPA及活性炭滤网
3. 使用说明书及保用证

## 注意事项

使用前，请仔细阅读本用户手册，并妥善保存以备将来参考。

1. 为避免触电和火灾，请勿让水、液体或任何易燃清洁剂进入或清洁产品。
2. 请勿在产品周围喷洒杀虫剂、香水或其他易燃喷雾剂。
3. 连接电源之前，请检查产品电压是否与当地电源电压一致。
4. 本产品不能替代日常通风，日常除尘或用作抽风橱。
5. 确保使用本产品并将其放在通风良好的地方。
6. 使用时，请在产品的背面和侧面至少留出30厘米的空间。
7. 使用前，请确保滤网及其盖子均已正确安装。
8. 请勿将手指或其他物品插入出风口/入气口，以免造成人身伤害或其他损坏。
9. 请勿将机器放置在炉子或加热器等加热装置附近。
10. 请勿尝试修理、拆卸或改装本机。
11. 请使用当地交流电源插座。将产品连接到电源之前，请确认产品机身注明标的电压与本地电压匹配。
12. 清除电源插头上的灰尘，并确保完全插入电源插座。如果电源线或插头损坏或不能正常使用，为避免危险，必须由制造商或保修部的专业人员进行更换。
13. 发生异常情况时（例如，有烧溶的气味、过热等），请关闭机器并移除电源。
14. 请勿用衣服、布条、窗帘等遮盖入气口。请勿阻塞入气口和出风口，例如，请勿在出风口上或前面放置物品。
15. 请勿在浴室或其他可能与水接触的地方使用机器，或用水冲洗机器。
16. 请勿在阳光直射，风吹雨淋的地方使用本机。
17. 请勿在医院、工厂或实验室等使用化学药品或易漏油或易燃气体的地方放置。

18. 如果长时间无人使用，请每2周检查一次。
19. 请勿让机器倾翻，也不要将机器水平放下以搬运机器。
20. 确保在机器周围留出一定的空间。四周30厘米的空间。通风不足可能会导致过热或火灾风险。
21. 拔出电源插头时，请握住插头。
22. 此产品仅供一般家居使用。

## 智能移动应用平台服务协议

请参考移动应用程序内容：在接受本协议之前请您务必仔细阅读本协议的移动应用程序全部内容，充分理解条款内容，特别是限制及免责条款。限制或免除责任条款，私隐声明，将以加粗或其他醒目形式提示您注意。如果您对本协议的条款有疑问的，请联系相关业务部门进行询问。除非您已阅读并接受本协议及相关协议、规则等所有条款，否则，您无权使用本服务。一旦您选“同意协议并提交”（具体措施详见注册页面）并完成注册流程，或您以任何方式使用本服务，即视为您已阅读并同意上述协议、规则等的约束。如您有违反本协议的任何行为时，智能生活有权根据您的违反的情况随时单方采取限制、中止或终止向您提供服务等措施，并有权追究您相关责任。

## 如何处理废弃电子产品

1. 请勿将电子产品当成家庭废弃物丢弃；
2. 请依当地的法例规定处理废弃的电子产品；
3. MOMAX鼓励您积极参与电子产品回收计划。

## 保养条款

1. 由购买日期起12个月内，如产品有损坏或故障，经本公司技术人员证实为在正常使用之情况下发生，本公司将提供免费维修服务；
2. 维修时必须出示本保用证及购买商号之发票正本，如果用户不能提供，本公司有权不提供维修服务。用户可能需要支付相关维修费用；
3. 保用期内，出现以下条款产品保用证自动失效：
  - (a) 是可消耗的部件，例如过滤网；
  - (b) 非本公司人员恣意拆解或维修产品之任何部分；
  - (c) 错误的操作如：非法接驳电源，以及水、污秽物渗入产品内导致产品损；
  - (d) 不可抗拒意外事件或自然灾害导致产品损坏；
4. 此保用证如经涂改，保用证自动失效；
5. 本公司有权增删任何维修及保用条款而不作通知；
6. 如因错误使用本公司产品而导致手提电话或其他电子产品有任何损坏，本公司不会承担任何责任；
7. 有关 MOMAX 原装产品和您的手机或电子产品的相容性，请在购买时向经销商确认。此产品规格随时可能变更，恕不另行通告；
8. 请浏览 [www.momax.net](http://www.momax.net) 了解最新产品资讯。

# **momax**

## **Warranty / 保用證 / 保用证**

Model / 型號 / 型号: \_\_\_\_\_

Date of Purchase / 購買日期 / 购买日期: \_\_\_\_\_

Remarks / 備註 / 备注: \_\_\_\_\_

### **Customer Service / 客戶服務中心 / 客户服务中心**

Hong Kong and Macau:

Unit A, 4/F., Cheung Lung Industrial Building,

10 Cheung Yee Street, Lai Chi Kok, Kowloon, Hong Kong

Hotline: 852-2402 3186 E-Mail: info@momax.net

香港及澳門:

香港九龍荔枝角長義街10號昌隆大廈4樓A室

服務熱線: 852-2402 3186 電郵: info@momax.net

中国内地:

摩米士科技(深圳)有限公司

广东省深圳市深南大道7006号万科富春东方大厦7楼

邮编: 518000 全国服务热线: 86-400-886-0010

电邮: info@momax.net.cn

Copyright © 2021 MOMAX Technology Ltd. All rights reserved.

MOMAX is registered trademark of MOMAX Technology Ltd.

All other trademarks are the property of their respective owners.

版權所有 © 2021 MOMAX Technology Ltd。保留所有權利。

MOMAX是MOMAX Technology Ltd 的註冊商標。

所有其他商標均為其各自擁有者的財產。

版权所有 © 2021 MOMAX Technology Ltd。保留所有权利。

MOMAX是MOMAX Technology Ltd 的注册商标。

所有其他商标均为其各自拥有者的财产。





[www.momax.net](http://www.momax.net)