



Note: If there is any technical improvement in the product, we will make a new version of the manual without notice. The product appearance and color may vary according to different version, please refer to the actual product received.

www.ahopegarden.com

Tel: +1(855) 705-0808

E-mail: support@ahopegarden.com



Made in China

AHOPEGARDEN

10 PODS INTELLIGENT PLANTER

HSXA1



USER MANUAL

Please read, understand and follow this user manual before use, then keep it for future reference.





- It is recommended to grow seasonal plants. Seeds of non-seasonal plants may not sprout in the environment warmer than 25°C / 77°F.
- It is recommended to keep plants 10cm away from light panel, so that the plants won't be scorched and can grow better.

If you have any questions, please contact us: <https://ahopegarden.com>





 ahopegarden 



 852-53086213 



 ahopegarden 

CONTENTS

IMPORTANT SAFETY INSTRUCTIONS	01
WHAT'S INCLUDED	02
KNOW YOUR INTELLIGENT PLANTER	03
HOW TO INSTALL	04
HOW TO PLANT	05
1. Prepare the Seed Pods	05
2. Add Water	06
3. Add Grow Domes	07
4. Connect to Power	07
5. Add Nutrients After Seeds Germination	08
FUNCTION OVERVIEW	10
Key Function	10
Pump Function	10
Lighting Function	11
SPECIFICATION	11
PLANTING TIPS	12
Germination	12
Planting	12
Pruning	12
Harvesting	12
Plant Herbs	13
Plant Salads	13
Plant Tomatoes & Peppers	13
Plant Flowers	13
FAQs	14
PLANTING NOTES	16

IMPORTANT SAFETY INSTRUCTIONS

- This device is not intended for use by persons(including children) with reduced physical, sensory or mental capabilities, unless they have been given supervision or instructions concerning use of the device by a person responsible for their safety.
- Children should be supervised to ensure they do not play with the device.
- To reduce the risk of electric shock, only use the power adapter we provided.
- Never use the planter if any parts get damaged, especially the cord or plug.
- If the planter is broken, please do not touch any inner part to avoid electric shock.
- Keep the electrical cord away from any heated surfaces.
- Do not allow water to contact hot LED grow lights.
- Do not soak or submerge base, cord, plug, or light panel in water or other liquid.
- Do not pull the cord when unplugging the adapter. Do not plug or unplug carelessly.
- Do not attempt to repair the device yourself. If the device is malfunctioning, please contact us directly.
- Do not use the device outdoors.
- Do not touch moving parts or hot parts, such as pump, light, and the like.

NOTE:




We have no liability or responsibility for fires or electric shocks caused by improper operation or not adhering to above safety instructions.

WHAT'S INCLUDED




BOX 1




Power adapter x 1

BOX 2

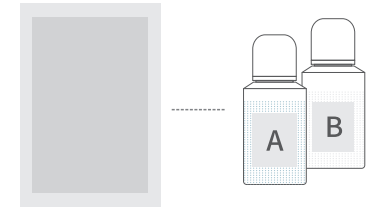


Fertilizer A&B x 1


KNOW YOUR INTELLIGENT PLANTER

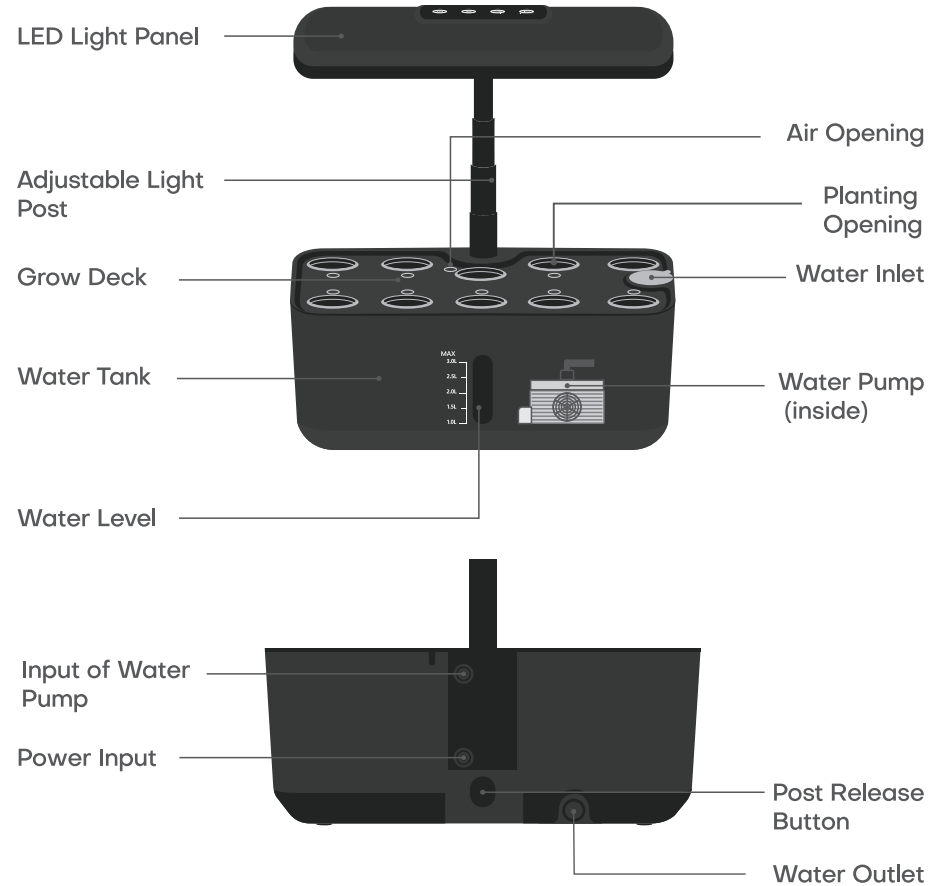


- ① Power
- ② Water Pump
- ③ Vegetables Mode
- ④ Flowers & Fruits Mode

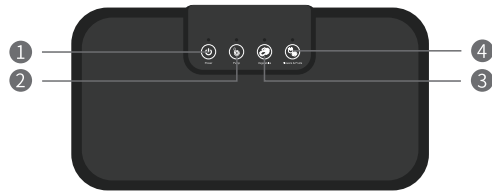

HOW TO INSTALL

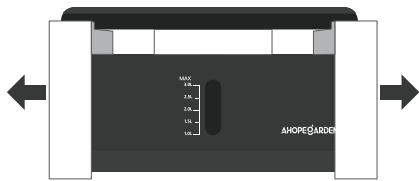


Step 1
Remove the package and protective foam.



Step 2
Press the bottom of light post and lengthen the light post to a certain height. Take out all accessories from water tank.



Step 3
Place the grow deck on water tank and make sure they are aligned properly.

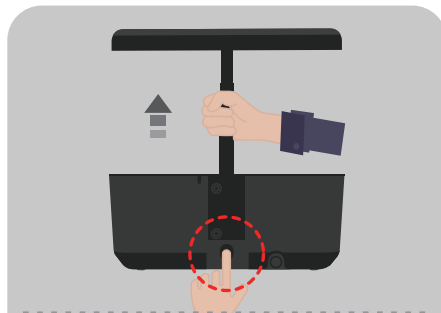

Note:
Press the button at the back of water tank to remove the light post.

HOW TO PLANT


1. Prepare the Seed Pods

IMPORTANT

The growth of plant is affected by temperature, please plant what is suitable for local season to get the best growing result.


Step 1

If you are going to grow large seeds, such as lettuce, basil, tomato, please soak seeds in water for 6-12 hours before planting.




Step 2

Soak the sponges in water till they absorb water thoroughly.



Step 3

Put soaked sponge into the basket.




Step 4

Gently place 2 or 3 seeds into the soaked sponge with tweezers. Place the pod label.


Note:

Pod label helps to prevent the sponge from developing mold/algae.

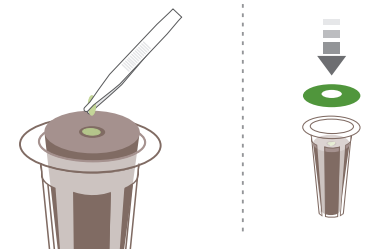


Step 5

Insert the seed pod into planting opening on the grow deck.

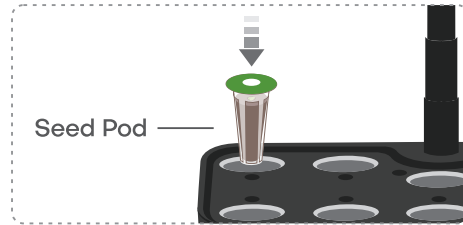


If you are going to grow small seeds, such as mint, petunia, dianthus, you can directly place seeds into soaked sponges with tweezers and drip a small quantity of water on seeds to keep them moist.

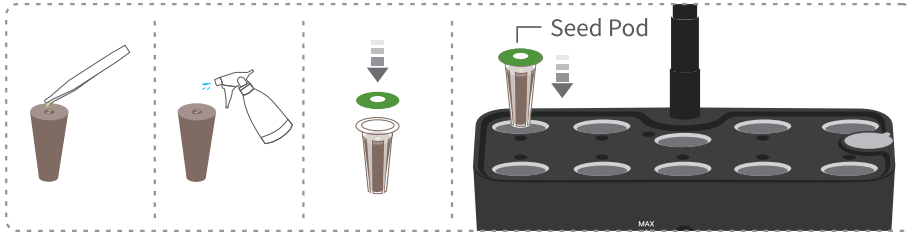


2. Add Water

Rotate the water inlet cover and add 3L water into the water tank through water inlet.

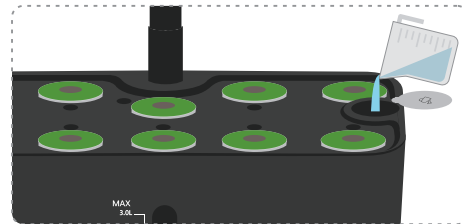


Note:

- * To prevent mosquito breeding or water evaporation, it is recommended to seal the water inlet and empty planting openings with covers.
- * You can observe the water level through transparent window, please add water in time when the water level is lower than 1L mark.



3. Add Grow Domes

Place one grow dome over each seed pod.




Note

- 1 The grow domes can create a warm and humid environment for seeds to root and help prevent pests invasion.
- 2 Please remove the grow domes in time after seeds germination

4. Connect to Power


Step 1

Connect the power adapter to power input and power supply.

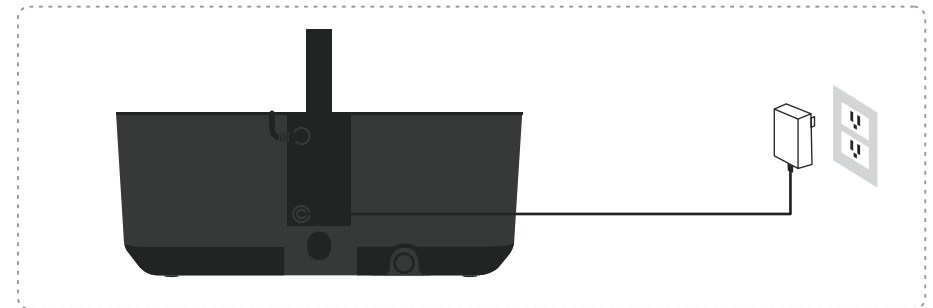

Step 2

Press power button to turn on the product, the planter will enter vegetables mode by default; meanwhile, the grow light will be on and water pump will start working.

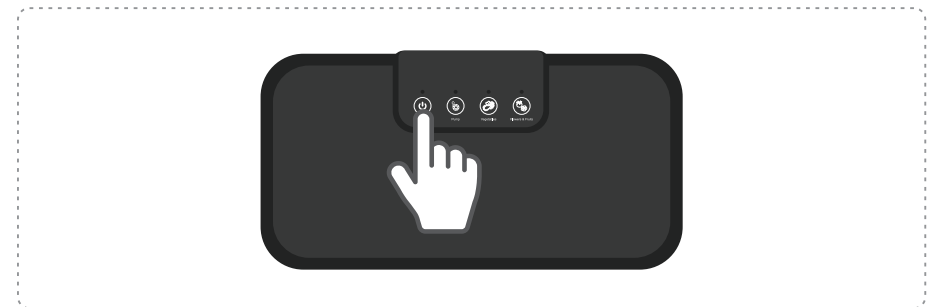

Notes:

* The LED indicator of power will turn green while the LED indicators of water pump and vegetables mode will turn blue.

5. Add Nutrients After Seeds Germination


Step 1

After seeds germination, remove the grow dome in time.




Step 2

Fill each bottle of fertilizer A and B with 100ml purified water, then shake the bottles until they are mixed well.

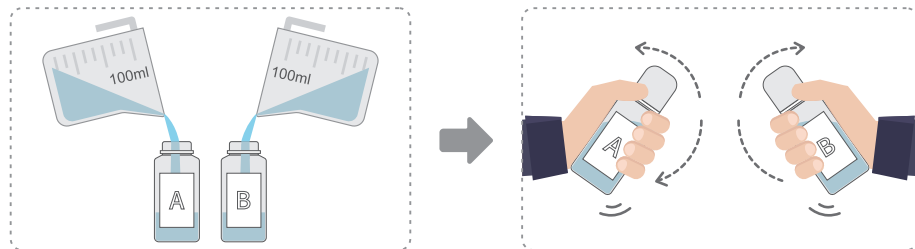

Step 3

Please refer to the scales on the bottles or caps to add 15ml nutrient A and 15ml nutrient B into water tank through the water inlet.

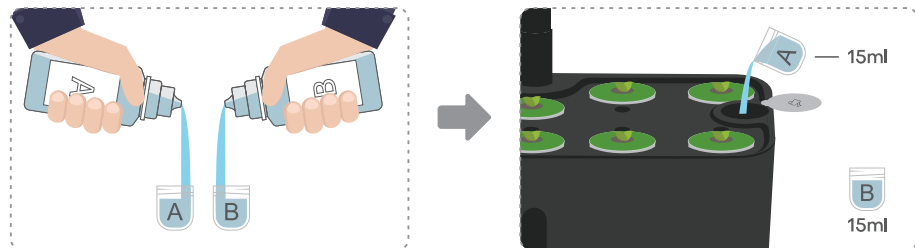

Notes:


- 1 It needs 5ml nutrient A and 5ml nutrient B for each 1L water.
- 2 The water tank can accommodate 3L water in total; therefore, we need 15ml nutrient A and 15ml nutrient B.
- 3 Please add water/nutrient according to the proportion sheet below.

Add Water	Nutrient
1L	5ml A+5ml B
2L	10ml A+10ml B
3L	15ml A+15ml B

Step 4:



Adjust the height of the light panel when the plants grow up.

Note: It is recommended to keep plants 10cm away from light panel, so that the plants won't be scorched and can grow better.

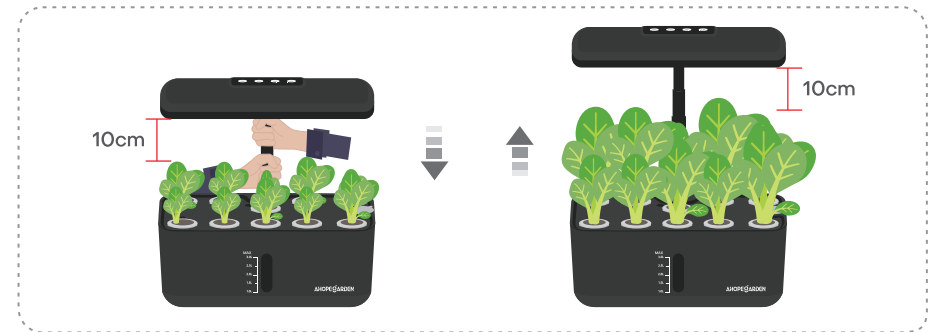

FUNCTION OVERVIEW

Key Function

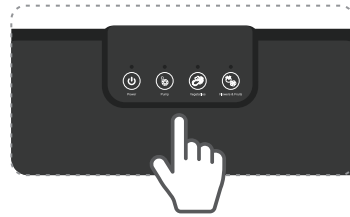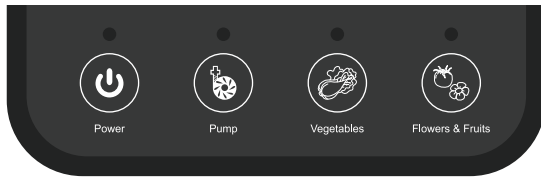

Power

Turn light and pump ON/OFF.




Pump

* Quiet pump. 30 minutes ON, 30 minutes OFF.

* The water pump will work by default after you power on the planter.

* It will automatically work for 30 minutes and stop for 30 minutes repeatedly to create a water circulation system so as to provide sufficient oxygen for the roots.

Pump Function

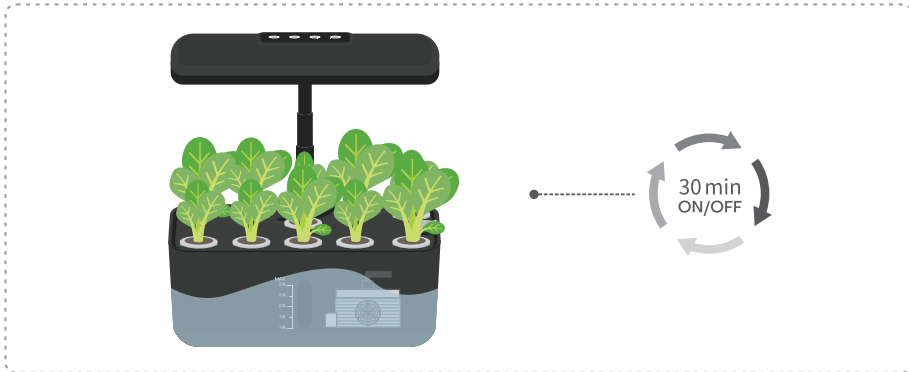


- 1 If you would like to turn off the water pump, please press the water pump button to manually turn it off.
- 2 To avoid entanglement with the water pump, please prune the root of your plants when it's necessary.
- 3 If the pump doesn't work, it may be under OFF state, you can press pump key to turn it on and open grow deck to confirm.

Lighting Function



Vegetables Mode

For the period of germinating and sprouting.

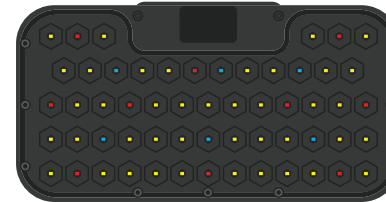


LED Lights



Flowers&Fruits Mode

For the period of blooming and fruiting.

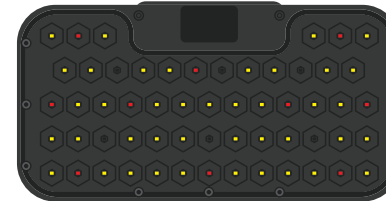

LED Lights



SPECIFICATION

Model No.	HSXA1
Input	12V \equiv 2000mA
Noise	< 40dB
Product Size	30.4(L) x 17.0(W) x 17.0(H) cm 12.0(L) x 6.7(W) x 6.7(H) inch
Product Weight	1.0kg /2.2 lb

PLANTING TIPS

Germination


- * Dark environment is more beneficial to seed germination, so you have no need to turn on the grow light during the period of seed germination. Meanwhile, cover the seed with pod label can partly prevent mold breeding.
- * The grow domes can create a warm and humid environment for seeds to root and help prevent pests invasion.
- * Plant growth is affected by temperature. Please ensure that the environment temperature is suitable for your seeds to sprout and grow.

Planting

- * If you plant different types of plants together, remember to prune faster-growing plants from the top.
- * If you find some little bugs, spray your plants with water to wash them off. Make sure you spray under the leaves as bugs usually reside there. For more persistent pests, an insecticidal soap may be used.
- * When plants are about 10cm tall, check each seed pod for multiple plants. Use shears gently snip the smallest plants at the stem, leaving just one healthy plant in each pod.

Pruning

- * Pruning promote health and harvest, and grow beautiful plants. Always try to prune/harvest just above new leaves as shown in the picture.
- * Do not raise the light panel but rather lower the plants. You may achieve more compact and bigger harvest if you prune the plants in time to keep a certain distance between light and all plants.

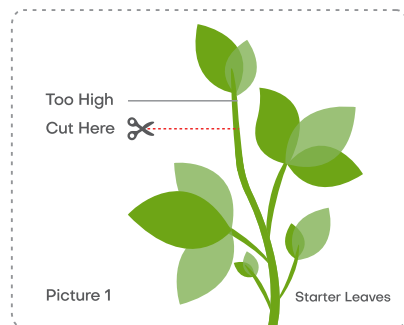

Harvesting

- * Smaller harvests for the first month or two until the plants get mature and larger harvests are available after that.
- * Harvest frequently to maintain a healthy garden, but take no more than 1/3 of any plant at a time.

Plant Herbs

- * Basil seeds sprout fast and grow rapidly. Harvest basil or any other fast-growing herbs to keep them 10cm below the light panel, and keep the height until all plants are well established.
- * Some herbs, such as chives, thyme, and oregano grow slowly and often get shaded by faster growing plants. Create space for slow-growing plants by pruning surrounding plants.

Plant Salads

- * Salads prefer cool temperatures below 72°F. When growing salads, take care to keep the planter away from sunny windows that might increase the temperature.
- * To harvest, remove whole leaves by cutting the base of leaves with scissors or shears, or by gently pinching off with fingers. Spread your harvest evenly across your planter.

Plant Tomatoes & Peppers

- * Tomatoes should not be mixed with other plants, as they spread out substantially as they grow. Other smaller plants will not get enough light and nutrient to grow well with tomatoes.
- * As your plants grow, it is perfectly normal to see some dead or brown leaves, especially at the lower part of the plant. Remove these leaves with scissors or pinch them off with fingers.
- * Start pollinating your plants regularly once they begin to flower. Gently shake plants from side to side. You may also pollinate by placing a fan in front of the plants.
- * Heavy fruits may cause plants to topple over, support them with wooden skewers or chopsticks.

Plant Flowers

- * When plants are about 2in tall, check each seed pod for multiple plants. Use shears gently snip the smallest plants at the stem, leaving just no more than 3 plants in each pod.
- * Wilted or dead flowers should be removed often for continued flower production.
- * Many flowers are slow to germinate, and some grow slowly once sprouted. Allow up to 3 weeks for seeds to sprout, and remember to keep the light panel 10cm away from the plants until all plants are well established.

FAQs

Q1. Why didn't I see the pump is working?

- * The pump will automatically turn ON/OFF every 30min, you may observe it during the period of OFF;
- * This appliance is equipped with quiet pump, won't make noise when working.
- * Please check if the root is entangled with the water pump; if yes, please remove the root in time; if not, please contact us directly.

Q2. Why do the seeds fail to germinate?

- * It is recommended to grow seasonal plants. Seeds of non-seasonal plants may not sprout in the environment warmer than 25°C / 77°F.
- * Please soak the seeds at least 6 hours to soften the peels. The soaking time may vary according to different seeds.
- * The grow domes can create a warm and humid environment for seeds germination.

Q3. Why do the seeds become moldy during the seeds germination?

- * If the seeds fail to germinate at the appropriate time due to unsuitable temperature, they will rot and become moldy. In this case, it is recommended to replace the seeds with the new ones in time.

Q4. What should I do if the sponge becomes moldy?

- * It is normal that the surface of sponge becomes moldy. You may leave it alone, then throw the sponge away after harvest.

* The sponge is for single use, you can buy replacement grow sponges in our store.

Q5. How often and how should I change water?

- * Normally, there is no need to change water during the growth of plants. Please add water and nutrients again when the water level is low. However, if the water turns green or gets stinky, you must change the water. The steps are as follows:
 - (1) Pull out the plug at the bottom of water tank and pour out water inside.
 - (2) Insert the plug again and place the grow deck on the water tank, then refill the water through the water inlet.

Q6. How often should I add nutrients?

- * There is no need to add nutrients before seeds germination. After seeds germination, please ensure that the water is at MAX(3L) mark and add 15ml nutrient A and 15ml nutrient B for the first time.
- * You may observe the water level every week, then add water and nutrients again if the water level drops quickly.
- * For each 1L water you add, please pour 5ml nutrient A and 5ml nutrient B into the water tank.

Q7. What should I do if the leaves turn yellow?

- * The leaves will turn yellow due to too little or too much nutrients. In this case, please pour out all water and refill the water tank to MAX(3L) mark, then add 15ml nutrients A and 15ml nutrients B again.

Q8. What should I do if the branches and leaves overgrow?

- * Please separate and keep the space between plants with flourished branches and leaves for better growth. Please prune the extra branches and leaves when necessary.

Q9. Why do some plants only produce flowers but fail to bear fruits?

- * Some plants need to be pollinated during flowering stage. You may use a cotton swab or a brush to gently rub the petals for pollination.

Q10. Should I cut all the plants after the harvest?

- * Harvest frequently to maintain a healthy garden, but take no more than 1/3 of any plant at a time.

PLANTING NOTES

Plant	Date of Sowing	Date of First Adding Water	Date of Adding Nutrients	Picking Records	Remarks	Recorder
						

Plant	Date of Sowing	Date of First Adding Water	Date of Adding Nutrients	Picking Records	Remarks	Recorder
