

PREPARING THE LUMINAIRE

SURFACE WALL MOUNT LUMINAIRE: FL300


SAVE THIS INSTRUCTIONS

READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE INSTALLATION. IF YOU ARE NOT FAMILIAR WITH THE NATIONAL ELECTRICAL CODE (NEC), CONTACT A QUALIFIED ELECTRICIAN TO INSTALL THIS LUMINAIRE.

WARNING.- Before installing this luminaire or doing any maintenance, turn off the power supply at the circuit breaker or fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.


NOTE:

To re-lamp, replacement parts or additional information, contact or visit manufacturer at www.lumux.net

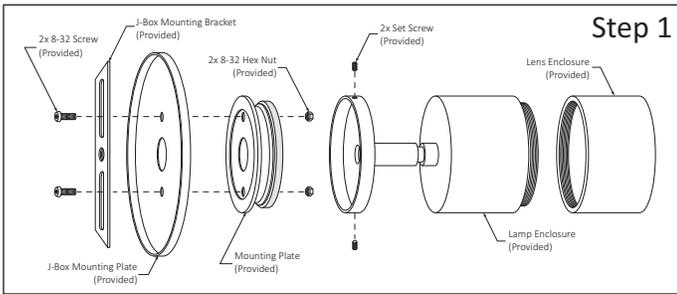

Step 1


Step 1 - Disassemble Luminaire Parts for easy Installation:
a.- Remove Mounting Plates and Lens Enclosure if need to install Lamp.

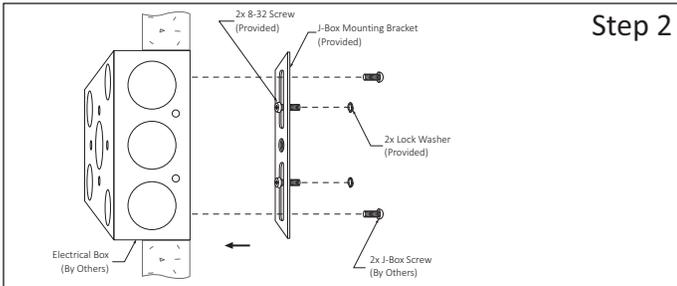

Step 2

Step 2 - Install Mounting Bracket:


- a.- Insert the two 8-32 Screws (provided) through the Slots, use the Lock Washer to secure tight.
- b.- Place the Bracket onto the Electrical Box and secure it using two J-Box Screws (By others).

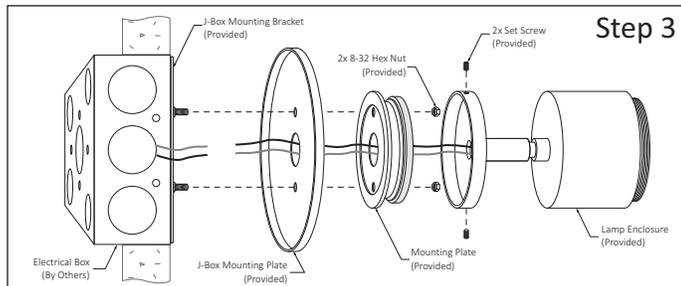

Step 3


Wire Diagram

Supply Wires



Step 3 - Make Wiring Connections:


- a.- Run the Electrical Wires through all the Parts and make hard-wire connections, see Wire Diagram.

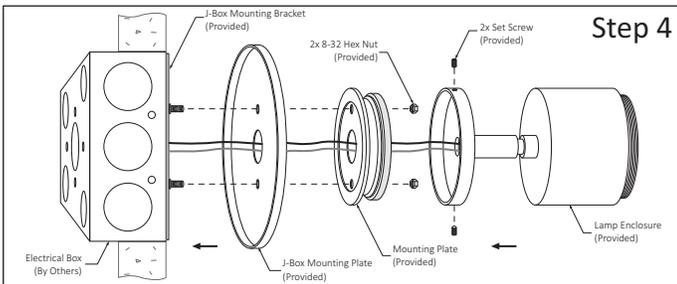

Step 4

Step 4 - Install Mounting Plates:


- a.- Place Mounting Plates allowing the Screws pass through the holes and fasten using the Hex Nuts (provided).

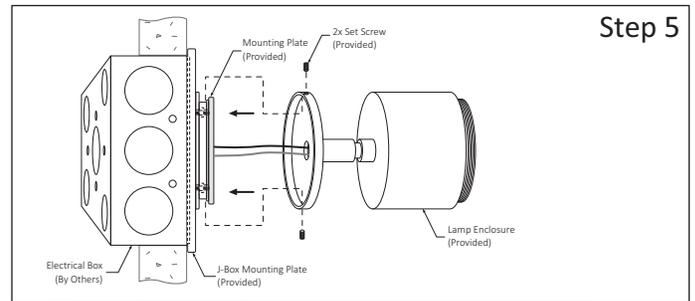

Step 5

Step 5 - Install Lamp Enclosure:


- a.- Place Lamp Enclosure onto the Mounting Plate secure using the two Set Screws (provided).

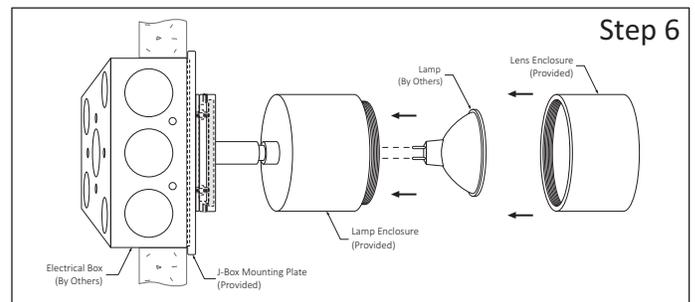

Step 6

Step 6 - Install Lamp (Optional):

- a.- Install Lamp when applicable and replace Lens Enclosure by screw it onto the Lamp Enclosure.

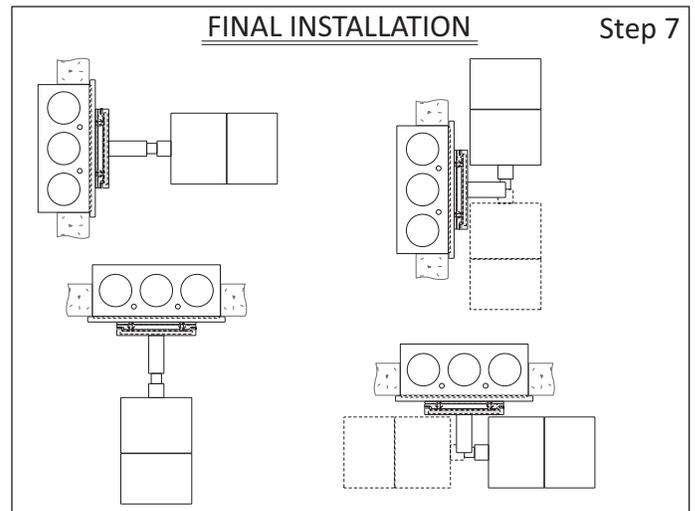

FINAL INSTALLATION

Step 7