

Points for Attention 01
Product Overview 03
Specifications05
Function Instruction
Maintenance 11
FAQ 12


## Danger Warning

- 1. To avoid electric shock and fire, do not allow water, liquid or any flammable detergent to get into or to clean the product.
- 2. Do not spray any flammable materials such as pesticides or perfumes around the product.

## Safety Warning

- 1. Before connecting the power supply, please check whether the voltage of the product is consistent with the local power supply voltage.
- 2. If power cord is damaged, in order to avoid danger, it must be replaced by professional staffs.
- 3. Please stop using if the plug, power cord or product is damaged.
- 4. Keep the air inlet/outlet free from being blocked.
- 5. Do not insert foreign things into the machine.
- 6. Person with physical or mental disability, or without relevant experiences and skills(including children)should use it under guiding and instructing.

03

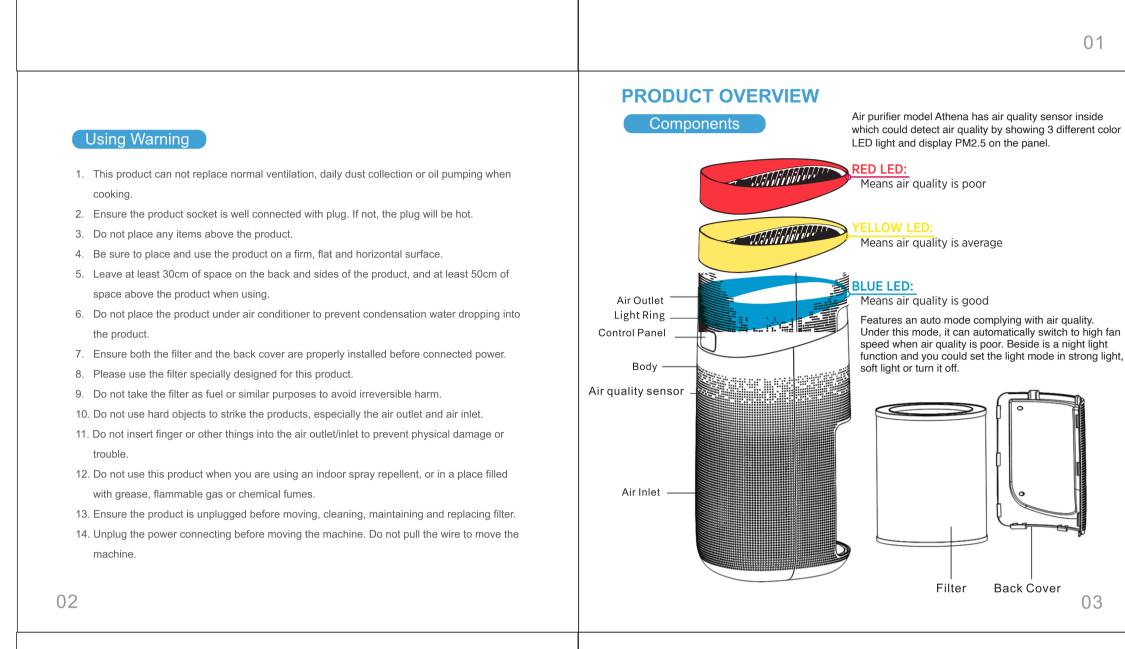


 $\widehat{\phantom{a}}$ 

## **SPECIFICATIONS**

Model No.	Athena
Power Supply	Input: AC 100-240V 50/60Hz
Power	50W
Noise	< 56dB
Coverage area	≤45-50m²
Size	L270* W303* H562 mm
Weight	4.8kg

## Control Panel

- 🛞 Wind Speed/Filter Button
- (<sup>1</sup>) Power Button
- 🕪 UV/Light Button
- (<sup>L</sup>) WIFI/Timer Button



6

▦

04






#### Before using, please remove the package of the filter. Ensure the machine is unplugged before removing or installing the filter.




(1) Press the red circle switch to (2) Remove the filter from the (3) Remove the packaging take out the back cover. machine of the new filter.

CLOSE

 $\sim$ 





(4) Put the filter into the machine. (5) Press the red circle switch button to close the back cover.

06

# UV/Light Button

- ① In the condition of working, long press the UV/Light Button for 3S to start the UV function. Long press it again, the UV function will be off. Every time you long press the UV/Light button, the buzzer rings for one time
- 2 In the condition of working, press the UV/Light Button, the light will be changed among the circulation of off-soft-standard.

# (L) Timer / WiFi Button

- (1) In the condition of working, press the Timer Button to set timer among the circulation of 2H, 4H and 8H. Every time you press the the button, the buzzer rings for one time, and the corresponding indicator will be on.
- (2) Long press the Timer/WiFi Button for 5 seconds to start WiFi function, and the indicator will be on. If you turn off the machine, the WiFi function need to be reset when you turn on the machine again

# 80

#### Add Devices in AP Mode

(1) If failed in Easy Mode, users could also add devices in AP Mode.

- 2 Press the WiFi button for more than 5 seconds until the WiFi indicator light begin to flash slowly, it means the device is already for configuration in the AP Mode.
- (3) Tap "+" on the top right of corner the APP. Select AP mode and tap it. Then tap "Ensure the indicator flash slowly". Then tap "Connect now" to go to the WLAN Settings interface in your mobile phone and select the WiFi network named "Smart Life\_XXXX" to connect it.

Connect the power, all indicators will be on for 1s and all lights will be off expect the power button. After that, the machine will be in standby mode.

## () Power Button

Press the power button, the machine turns on auto default mode, the corresponding indicator will be on, after 30S of pre-working, the light ring will display the relevant colors according the air quality.

## Wind Speed Button

- ①In the condition of working, press the Wind Speed Button to adjust the wind speed among the circulation of S-H-Auto grade, and the corresponding indicators will be on. Every time you press the button, the buzzer rings for one time.
- ② When the machine works in auto mode, the wind speed will be adjusted according to the air quality, and the light ring will display the relevant colors.
- ③ When the machine works in sleep mode, if no operation for 5 seconds, all lights will be off and the product will run in sleep mode, press any button can wake up the light.

#### **Reminder of Replacing Filter**

④In the condition of working, when the machine detects the filter is saturated after running for 2200 hours, the light ring will keep flashing in red. Long press the Wind Speed Button for 7s to stop flashing light and to reset after installing a new filter.



05

## WIFI Operation

#### **Download & Registration**

(1) Scan the QR code to download "Smart Life" APP. You can also search "Smart Life" in either APP store or Google Play to install the APP.



- (2) Open the "Smart Life" APP, tap "Register" to register a "Smart Life" account with your phone number or E-mail. Then sign in the APP.
- ③ Open the "Smart Life" APP, click "add device" or tap "+" on the top right corner of the APP homepage. There are two methods to enter the page of "add device" - Add WiFi manually or search for the devices automatically.

In the homepage of add device manually, choosing any one of product rang to enter a new homepage and ensure the indicator light flash quickly.

The devices provide two configuration methods. In the homepage of Easy mode, tap "Other methods" on the top right corner to enter Easy mode and AP mode, then could choose one of mode to connect with WiFi.

#### Add Devices in Easy Mode(Recommend)

- (1) Make sure your smart device is energized and your mobile phone is connected to your WiFi network. If the WiFi indicator of smart device do not flash, please press the WiFi button for more than 5 seconds until the indicator light keeps flashing quickly, it means the devices is ready for configuration.
- (2) Tap "+" on the top right corner of the APP, select type of service device and click it. When appearing "Add 1 device successfully", it means the connection is completed and your device will be listed in your APP list.

09

#### **Configure Google Home Device:**

Make sure your Google Home device is powered on and connected to a Wi-Fi network. Open the Google Home app on your phone. After successful login, tap on the menu in the upper left corner and select "SET UP" to set up Google Home.

It will notify you with a sound to ensure that you are connected to correct device. After you hear the sound, tap "YES" to proceed to the next step.

You can choose to differentiate the room where Google Home is located from other Google devices. Then, select the Wi-Fi network and language, wait for the system to complete the configuration, and tap "next.

According to the page prompts, choose whether to agree to the corresponding operation. When the page displays "Google Home is ready," select "continue" to continue to the next step.

(4) Return to the "Smart Life" APP, the connection will start automatically.

(5) When appears "Add 1 device successfully ", it means the connection is completed and your device will be listed in your APP list.

Now you can control your smart device via your mobile phone APP anytime and anywhere (Make sure your mobile phone and smart device are all connected to the network, and to change the router name into Smart Life XXX ).

#### Configure Amazon Echo

Open Alexa App, click Alexa Click on bottom right corner for Devices Click Add Device Click on type of device

Click on Discover Devices Wait to find device Verify correct device is selected

Control Smart Life devices with Alexa voice control phrase: Explanation:

Take light bulb as an example by the name of "light" {Device Name} 1) ON: "Alexa, turn on light {Device Name}" when you hear response "OK" means control successfully 2) OFF: "Alexa, turn off light {Device Name}"

# Click on "Tuya"

First, say "Alexa" to wake device, you will see the blue LED light lighten up around Alexa. You may use "turn on" to open some device. Use "turn off" to close some device. And lastly, you should say the name of the device you want to control. Try out these phrases ( {Device Name} should be the name of your device):

3) Dimming: "Alexa, set light {Device Name} to 80 percent" "Alexa, dim light {Device Name} to 50 percent"

"Alexa, dim light {Device Name} to 100 percent" 4) Color changing: "Alexa, set light {Device Name} to blue"

10

## MAINTENANCE

### Notice

- Ensure the machine is unplugged before maintenance.
- Do not immerse the air purifier into water or any liquid.
- Do not use abrasive, corrosive or flammable cleansers (such as bleach or alcohol) to clean any part of the unit.
- Clean the filter regularly. Do not wash or reuse the filter.
- Ensure the machine is unplugged before replacing the filter.
- Please sterilize the filter under sunlight regularly.
- Do not use a vacuum cleaner to clean the filter or wash it directly.

#### Cleaning & Storage

- (1) Ensure the machine is power-off and unplugged.
- 2 Take out the filter to clean any dust from the surface of it.
- ③ Use a soft cloth with neutral cleanser to clean away any dust or debris from thesurface of the machine.
- ④ After the filter is dried, install it into the air purifier to restart.
- (5) If you do not use the machine for a long time, ensure the machine is dry out, put on the dust cover bag and place it in a cool and well-ventilated place.
- (6) To ensure a good performance of the machine, please turn on the machine for a few minutes from time to time.
- Notice: Please don't drop any water into the machine when clean the air outlet.

Next is the voice control guide tutorial. Once you're done listening, tap "FINISH SET UP" At this

point, Google Home setup is complete.

Key step - link Action On the main page of the Google Home app, tap the sidebar menu in the top left corner and select "Home Control."

Then tap the plus sign in the lower right corner and search for "Smart Life"

Find Smart Life on the list and open it, select the country where your Smart Life app account is located, enter your Smart Life app account and password, and tap "Link Now Enter the Smart Life app account and password, then tap "Link Now" to link your Smart Life account. Choose the room where your device is located, and then the skill will appear on the home Control Devices list. Now you can begin your smart home journey.

## **Control Smart Life device with Google Home:**

Now you can control your smart device with Google Home. With the bedroom light as an example, the supported commands include (Google Home currently only supports English commands)

Ok Google, turn on/off bedroom light. (Turn on/off the light or other device) Ok Google, set bedroom light to 50 percent. (Set the light to any brightness) Ok Google, brighten bedroom ligh. (Brighten the light) Ok Google, set bedroom light to red. (Set the color of the light, only color changing lights support this function)

11

## FAQ

SITUATION	REASON
No working	<ul><li> Is it plugged into a power socket? Is there a power outage?</li><li> Is the home leakage switch or fuse cut off?</li><li> Is the filter replacing indicator keep flashing?</li></ul>
Poor performance	<ul><li>Is there any dust in the surface of primary filter?</li><li>Is there any obstacle blocking the air inlet/outlet.</li></ul>
Significant noise	<ul> <li>Is there anything stuck on the fan in the air outlet?</li> <li>Is the machine tilted?</li> <li>Please set a lower grade of wind speed if the noise is too loud , or set sleep mode of wind speed when using in bedroom at night.</li> </ul>
Coming out nasty smell	<ul> <li>It is the normal phenomenon that the machine emits the smell of plastic for the first time.</li> <li>The machine will emit nasty smell if the filter is dusty, so in this situation, please clean or replace the filter.</li> </ul>
	<ul> <li>If the burning smell emits from the machine, please unplug the power socket and contact with buyer or customer service.</li> </ul>
The reminder of replacing filter after user have replaced a new one.	<ul> <li>Please press the power button B for 7s to reset the machine and the life counter of the filter will start.     </li> </ul>

Notice: If the above FAQ can not solve your problems and need maintenance, please contact the supplier or after sales service center. Please do not disassemble the machine to maintain by yourself.

13