

CV Triac Dimmable LED Driver

Model No:	OTM-TDJ30
Input Voltage:	100-130V AC
Input Current:	0.26A
Frequency:	50-60 Hz
Output Voltage:	12V DC
Output Current:	2.5A
Max Power:	30W
Dimensions L x W x H:	180mm x 59.85mm x 34.5mm
Ambient Temperature (Ta):	50°C
Case Temperature (Tc):	90°C
IP Rating:	IP20
Dimmable:	Triac/Phase-Cut Dimming
Wiring/Housing:	Hardwire
Standards:	CE/ETL/RoHS


Job Name: _____

Distributor: _____

Type: _____




Installation Diagram

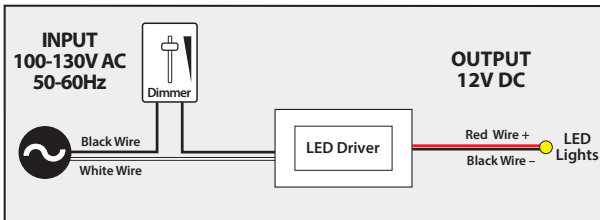

Triac Dimming

Veroboard Constant Voltage Triac Dimming LED Driver works with any standard Leading Edge MLV, TRIAC, or nearly many Lutron/ Leviton dimmers. The dimmer switch installed should be on the 120VAC side of the LED driver.

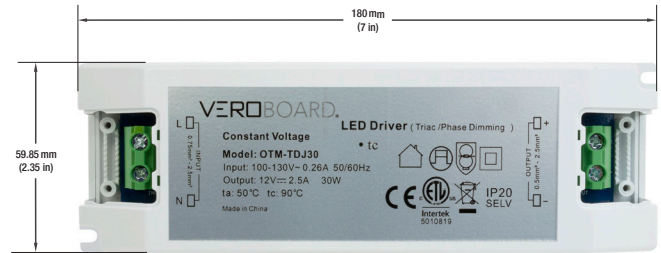

**12V DC
30W**

SKU: 666561425470