


## CV 0-10V Dimmable LED Driver

<b>Model No:</b>	OTM-TD20
<b>Input Voltage:</b>	100-130V AC
<b>Input Current:</b>	0.24A
<b>Frequency:</b>	50-60 Hz
<b>Output Voltage:</b>	12V DC
<b>Output Current:</b>	1500mA
<b>Max Power:</b>	18W
<b>Efficiency:</b>	$\eta > 80\%$
<b>Power Factor:</b>	PF > 0.95
<b>Dimensions:</b>	$\varnothing$ 66.16mm x 20.15mm Depth
<b>Class Certification:</b>	Class II
<b>Ambient Temperature (Ta):</b>	40°C
<b>Case Temperature (Tc):</b>	80°C
<b>IP Rating:</b>	IP20
<b>Dimmable:</b>	0-10V Dimming
<b>Wiring/Housing:</b>	Hardwire
<b>Standards:</b>	ETL/RoHS


Job Name: \_\_\_\_\_

Distributor: \_\_\_\_\_

Type: \_\_\_\_\_

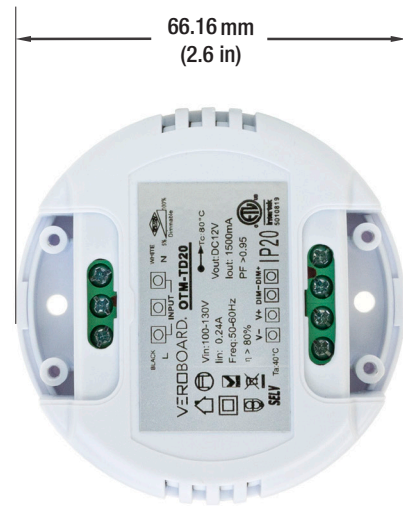

### Installation Diagram

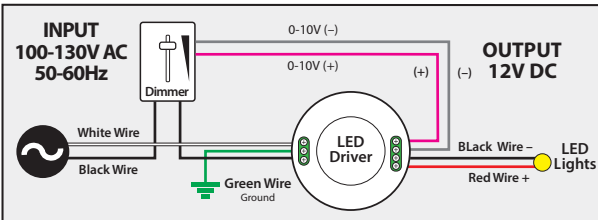

### 0-10V Dimming

Veroboard 0-10V Dimming Constant Voltage LED Driver works with 0/1-10V dimmers. The dimmers use a low voltage 0-10V DC signal connected to the LED power supply.



**12V DC**  
**18W**  
**CLASS II**

**SKU: 666561425517**