

# Universal

8

# Sleigh Bookcase Hutch



# IMPORTANT: PLEASE READ THE INSTRUCTIONS CAREFULLY AND KEEP FOR FUTURE REFERENCE



# IMPORTANT: THE ASSEMBLY OF THIS PRODUCT REQUIRES TWO PEOPLE READ ALL INSTRUCTIONS BEFORE ASSEMBLY AND USE OF THE PRODUCT.

Boori Australia Pty Ltd 18-20 Charles Street St. Marys Sydney NSW 2760 Australia Ph: 61 2 9833 3769 Fax: 61 2 9673 4240 www.boori.com.au Boori (Europe) Ltd Unit 1,Transigo Gables Way Thatcham,Berkshire, RG19 4JZ Ph: (44) 016 3529 5670

Fax: (44) 016 3529 5670 Fax: (44) 016 3587 7552

www.boori.co.uk

Halim & Boori Company 10F. Halim INT'L B/D, #1674-4, Seocho-Dong, Seocho-Gu,

Seoul, Korea Tel: +82-2-598-1470

Fax: +82-2-583-8885 E-mail: ted@boori.co.kr Postal code: 137-725. ブーリジャパン(株)

〒541-0057

大阪府大阪市中央区北久宝寺町

4-2-10


Ph: 06-4963-3939 Fax: 06-4963-3900 E-mail: info@boori.co.jp

#### Instructions for Universal Sleigh Bookcase Hutch (B-SLBH) Hardware and Parts List 5 X M5\*16mm Connecting 4 x M6\*60mm Connecting **4** x **14** x 14 x **2** x **4** x **1** x **2** x 1 x Connecting Excenter Self tapping Shelf Wood Allen keys Braces Wall strap supports fittings screws dowels bolts bolts В D Е Н G 1 x Fixed Shelf 1 x Top Panel 9 (Rlght) (Left) 1 x Headboard 1 x Adjustable Shelf 2 x Side Panels (Left & Right) 1 x Backboard Top End 1 x Backboard Bottom End 10 **(8**) 1 x Base 1 x H-section 2 x Back Panels B-SLBH 1/7


### **ASSEMBLY AS A BOOKCASE**

### **Step 1:** Preparation work:

Screw 14 x A connecting bolts firmly into the Top Panel (1) and the Side Panels (9).

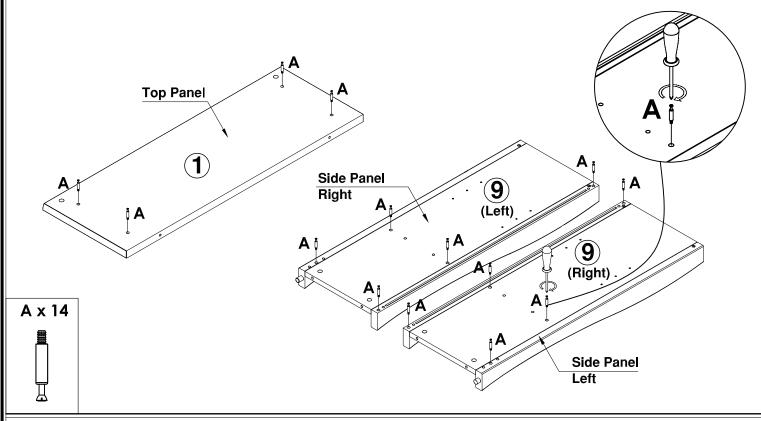


Step 2: Attach the Headboard 2, Backboard Top End 7, Backboard Bottom End 3 and Fixed Shelf 5 to the Side Panel 9 (Left) using 5 x B excenter fittings.

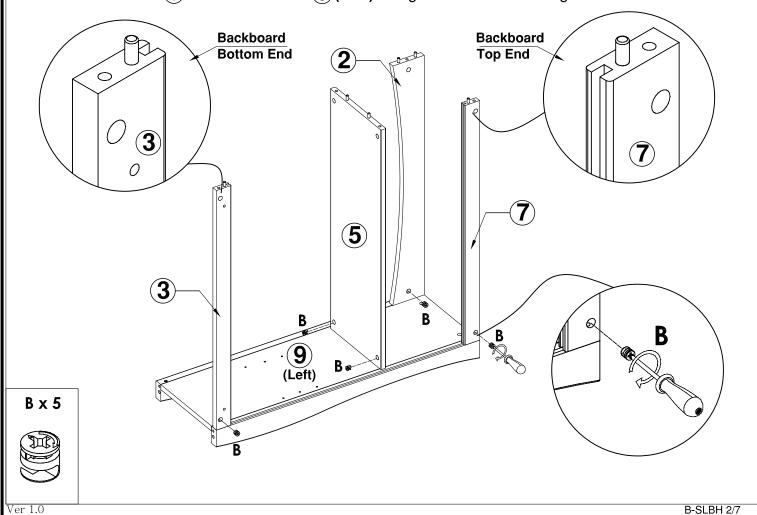


# **ASSEMBLY AS A BOOKCASE (CONTINUED)**

Step 3: Insert the Back Panels 8 into the Backboard Bottom End 3 and Backboard Top End 7 using the H-section 4.

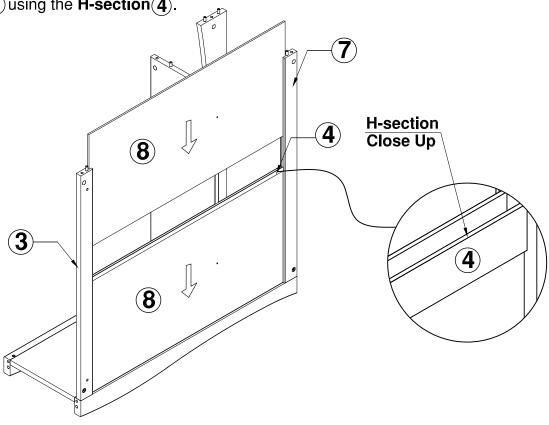


Step 4: Attach the Side Panel (9) (Right) using 5 x B excenter fittings as shown.

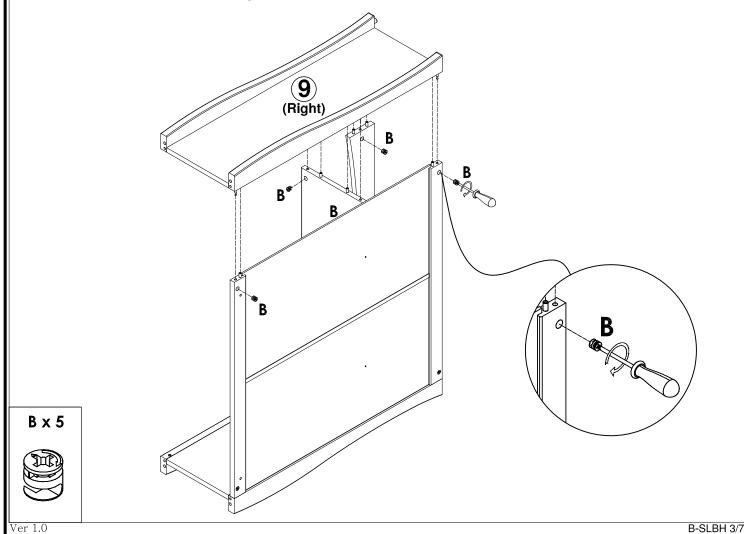


# ASSEMBLY AS A BOOKCASE (CONTINUED)


Step 5: Attach the Top Panel 1 using 4 x B excenter fittings.

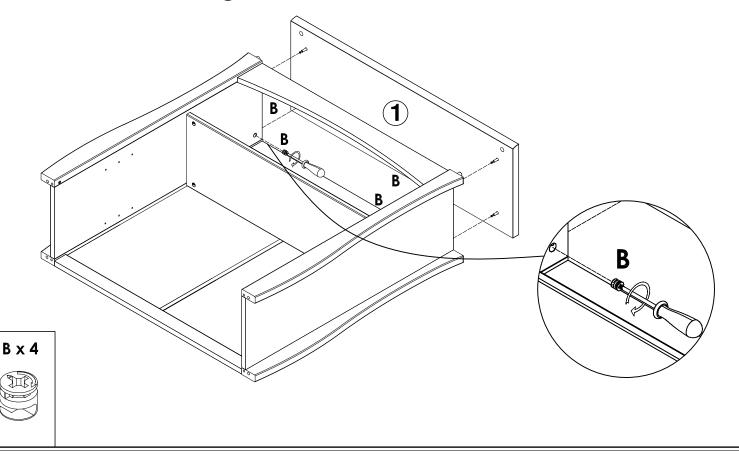

Step 6: Attach the Back Panels (8) using 2 x C self tapping screws as shown.

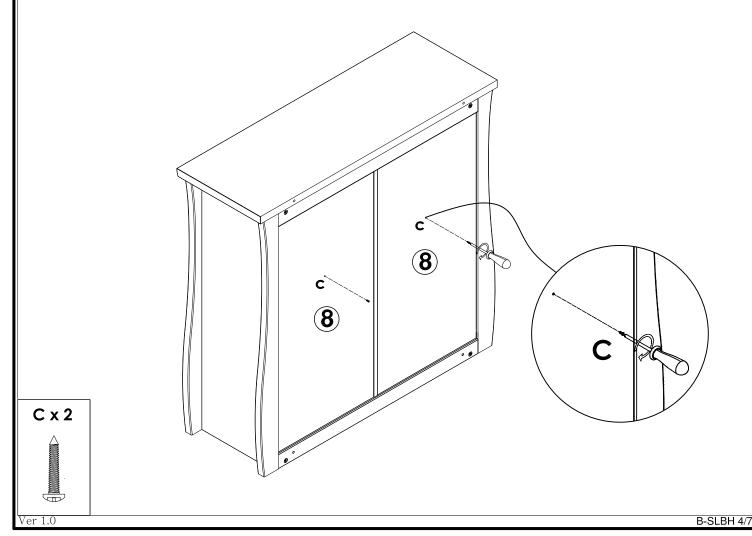

# ASSEMBLY AS A BOOKCASE (CONTINUED) Step 7: Attach the Base 10 using 4 x (F+G) wood dowels and connecting bolts. G 10 G x 4 F x 4 Step 8: Attach the Adjustable Shelf 6 using 4 x D shelf supports.

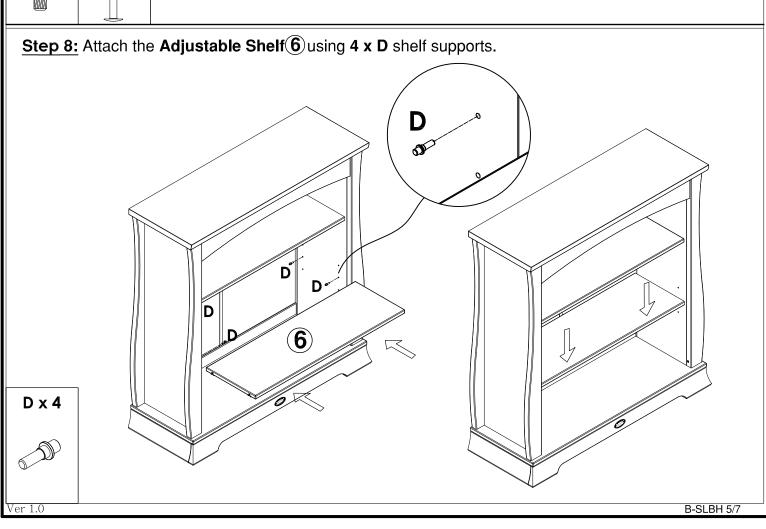


## ASSEMBLY AS A BOOKCASE (CONTINUED)

#### Step 9: Attach the Wall strap:


#### Note:

- Attach J to the rear edge of the **Top Panel** using **1** x **E** connecting bolt, either to the left or right side of the **Top Panel**.
- The Wall strap is only intended to be used with the Boori product that it is supplied with.
- Never attempt to modify or change the Wall strap in any way.
- Never use any other fittings for attaching the strap to your furiture other than those supplied.
- Never use the screw provided to attach the Wall strap to the wall, as no wall attachment fittings are supplied. This is because the type of fittings required to attach the wall strap to the chosen wall is determined by the walls composition.
- If you are in any doubt about the correct type of fittings to use when attaching your Wall strap, consult a professional before attempting to fix it to the wall for your safety.

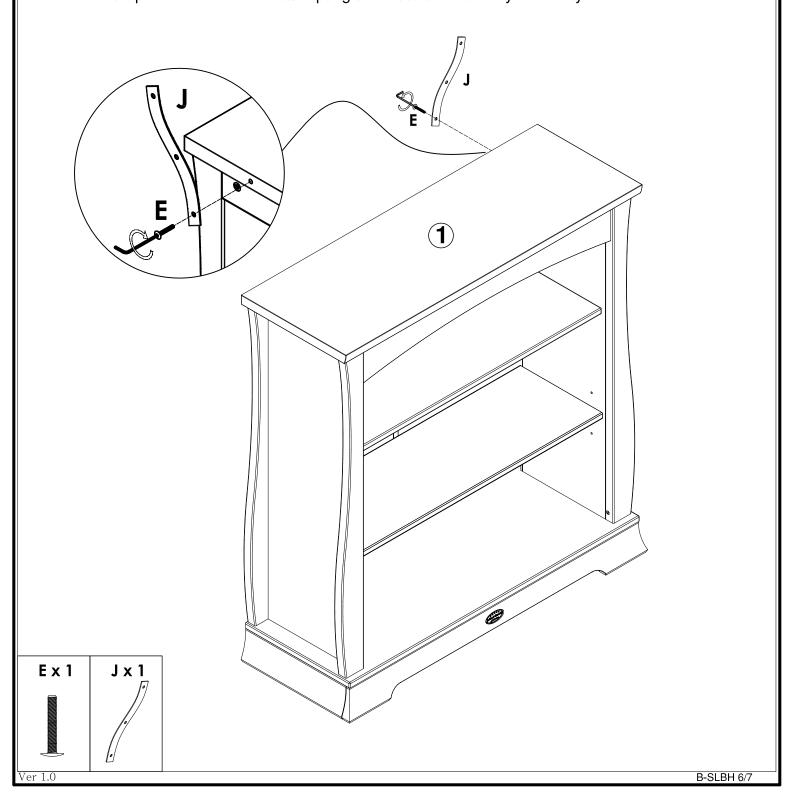


## **CONVERTING YOUR BOOKCASE TO HUTCH**

Step 1: Detach the Base10 by removing 4 x (F+G) wood dowels and connecting bolts.

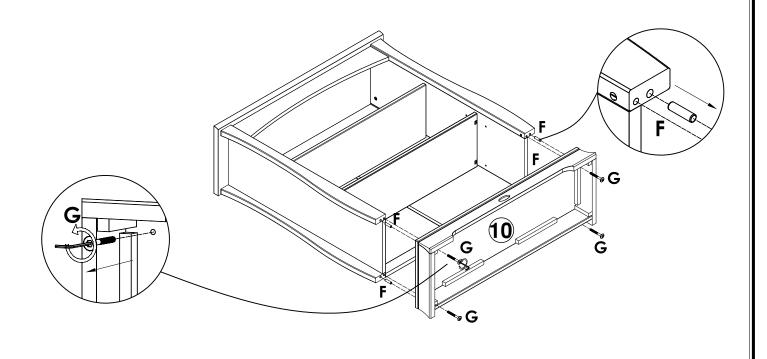

Step 2: Attach the Hutch to a Chest, using 2 x H braces and 4 x E connecting bolts as shown.

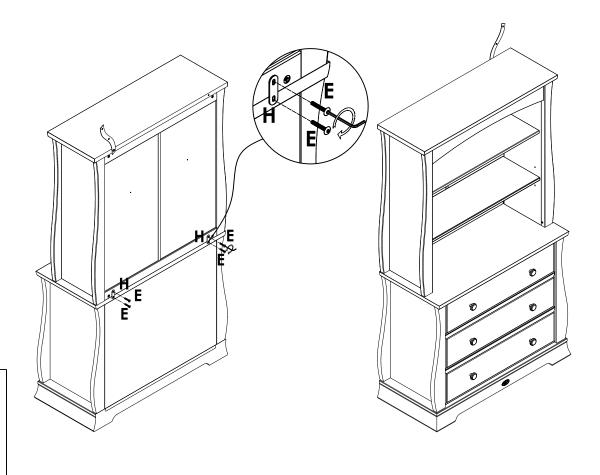

B-SLBH 7/7