


S14

INTEGRATED NETWORK STREAMER



2 x 150 Watts of robust power, 4 Ohms

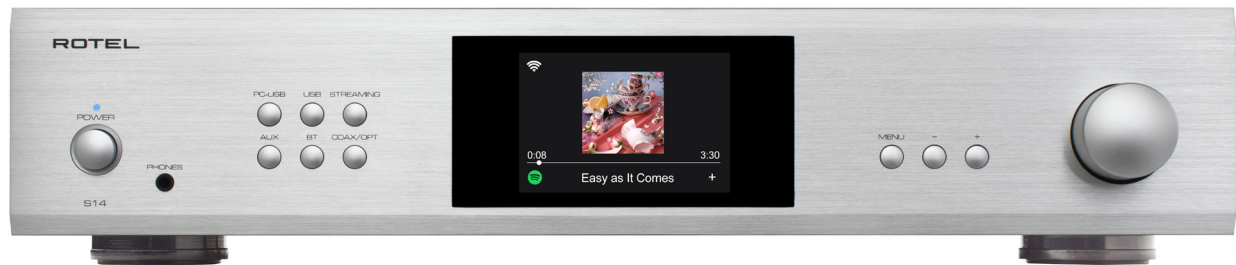

Class AB amplifier design



Wireless aptX™ HD and AAC Bluetooth



ESS premium 32-bit Digital to Analog Converter



Includes remote control

The Rotel S14 Integrated Network Streamer provides seamless access to the near limitless catalog of online music with ease and sophistication. This all-in-one product streams music directly from popular music sources rendering the audio with detailed precision and clarity delivering 150 Watts of Class AB power into 4 ohms to even the most demanding loudspeakers.

Leveraging over 60-years of audio design experience the S14 renders digital music files including MQA utilizing a 32-bit ESS Sabre Digital to Analog converter. The integrated amplifier circuits feed an array of high current output transistors powered by an oversized toroidal transformer delivering accuracy with exceptional bass control.

Convenient and intuitive the S14 supports both wired and dual-band Wi-Fi network connections for ultimate installation flexibility. Album artwork, track, title, and artist information is presented on the front panel color graphic display. Simple device setup and configuration is also available using the front panel and included remote control.

Stream using your favorite music App or use the S14 iOS and Android Apps to access thousands of Internet Radio stations, Podcasts, and high-resolution music from Tidal and Qobuz.

The S14 also includes Coaxial, Optical, Analog RCA, PC-USB and aptX™ HD Bluetooth providing connection to your favorite audio sources such as CD Players, Tuners and Turntables with line level outputs. A rear USB connection supports playback of MP3, WMA and AAC audio files from flash drives.

This just-add-speakers solution continues to deliver on the promise of quality, performance, and value synonymous with this Japanese family-owned audio brand.



S14

INTEGRATED NETWORK STREAMER



SPECIFICATIONS

| | | | |
|--|-----------------------------|---|---|
| Maximum Power Output | 150 watts/ch (4 ohms) | Digital Section | |
| Continuous Power Output | 80 watts/ch (8 ohms) | Frequency Response | 10 Hz - 90k Hz (0 ± 2 dB, Max) |
| Total Harmonic Distortion | < 0.04% | Signal to Noise Ratio (IHF A-weighted) | 98 dB |
| Intermodulation Distortion (60 Hz : 7kHz, 4:1) | < 0.03% | Input Sensitivity/Impedance | -20 dBfs / 75 ohms |
| Frequency Response Line Level Inputs | 10 Hz - 100k Hz, 0 ± 0.5 dB | Digital Inputs | SPDIF LPCM (up to 24-bit / 192k Hz) |
| Damping Factor (20 Hz - 20 kHz, 8 ohms) | 400 | PC-USB | USB Audio Class 2.0 (up to 24-bit / 384k Hz)* *Driver installation required |
| Input Sensitivity / Impedance Line Level Inputs | 200 mV / 47k ohms | Power Requirements | |
| Input Overload Line Level Inputs | 4.5 V | USA | 120 V, 60 Hz |
| Tone Controls - Bass / Treble | ± 10 dB at 100 Hz / 10k Hz | EC | 230 V, 50 Hz |
| Signal to Noise Ratio (IHF A-weighted) Line Level Inputs | 100 dB | Power Consumption | 280 watts |
| Digital to Analog Converters | ESS | Standby Power Consumption Normal | < 0.5 watts |
| | | BTU (4 ohms, 1/8th power) | 733 BTU/h |
| | | Dimensions (W x H x D) | 430 x 93 x 345 mm 17 x 3 5/8 x 13 1/2 ins |
| | | Front Panel Height | 80 mm / 3 1/8 ins |
| | | Weight (net) | 9.15 kg, 20.17 lbs. |
| | | Finish | Silver and Black |

All specifications are accurate at the time of printing.
Rotel reserves the right to make improvements without notice.

www.rotel.com

MQA and the Sound Wave Device are registered trade marks of MQA Limited. © 2016
Being Roon Ready means that Rotel uses Roon streaming technology, for an incredible
user interface, simple setup, rock-solid daily reliability, and the highest levels of audio
performance, without compromise.
The Spotify Software is subject to third party licenses found here:
www.spotify.com/connect/third-party-licenses
Chromecast built-in is a trademark of Google LLC