


Smart Wireless Floodlight Camera

the bright way to do home security.



Welcome

Thank you for choosing our Floodlight Camera. Getting started is easy.

1. What's Included.



2. Turn off power at fuse or circuit breaker.



WARNING:



Risk of electrical shock. Disconnect power at the fuse or circuit breaker before installing or servicing.

Service and maintenance of this fixture should be performed by a qualified and licensed electrician.

- Verify that the supply voltage is correct. Connect fixture to a AC100V-240V, 50/60 Hz power source.
- This fixture is intended to be connected to a properly installed and grounded UL listed junction box.
- Light fixture must be powered directly off a circuit box.
- Fixture can't be used with a dimmer switch, motion occupancy sensor and other electronic switching devices unless otherwise designated.
- All wiring connections should be capped with UL listed wire connectors.

CAUTION

Risk of Fire, do not mount the unit against flammable surfaces.

NOTICE

Motion Sensor will not work correctly if it is installed:


- Near the outlet of a central heating boiler Within sight of reflection of moving water

· Near an air conditioning unit

- · Where other lamps could shine on the detector
- · Pointing directly at moving vehicles

3. Install mounting bracket to junction box.

Fix the mounting bracket to the junction box using the bracket screws.

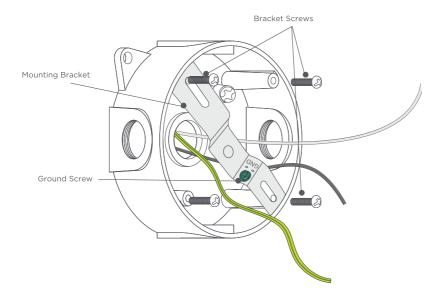


4. Install floodlight to mounting bracket.


Connect floodlight wires through the sponge cushion:

- a. Connect the white wires together with the wire nuts
- b. Connect the black wires together with the wire nuts
- c. Connect the green/yellow wires together using the ground screw onto the bracket

Fix the light on the junction using the center screw and insert silicon cap to cover screw head. Caulk around the light fixture using waterproof glue to seal the rear cover and the light to make sure lamp is waterproof.

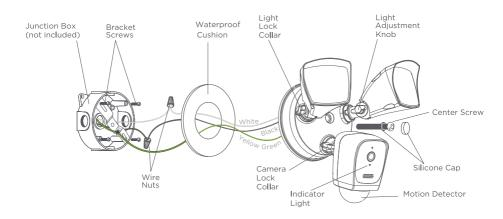

Europe/Australia gauge power cord color: Blue, Brown, Yellow green. Connect Floodlight Camera cables with same color junction box cables.

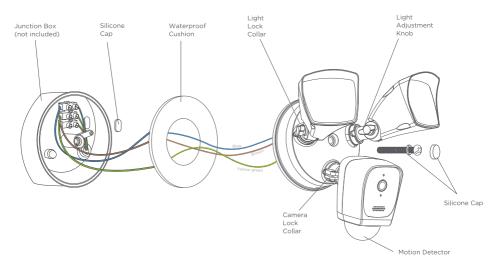

5. Turn on power at breaker.



After restoring power, the lights will turn on and your Floodlight Camera will make a prompt sound to let you know it's in setup mode.

If the light is connected to a light switch,

If the light is connected to a light switch turn on the light switch.

6. Connection Preparation.

Please install the Floodlight Camera within WiFi covered area to ensure best performance.



Note: Make sure smart phone is connected with your wireless router. Please note the camera only supports 2.4G Wi-Fi, not 5G Wi-Fi.

7. Get the APP and create an account.

Download the 'Home Zone' APP to your smartphone from App Store or Google Play.










Launch the app from your smart phone and **Create** an account. Follow the on-screen instructions.

8. Set up your floodlight camera.

- Make sure the indicator is blue and flashing quickly.
- If the indicator light is not blue and flashing, press the Reset button on the camera head for 5 seconds then release. The indicator light on the front of the camera will then blink blue.
- Open the App and click on the top right "+" icon to sync new products
- Follow App's instructions to complete network pairing process.
- If the indicator light is solid blue, the camera is connected and ready for viewing,










You're done!

Congratulations! Your camera is set up and ready to go.





Basic Device Controls



Save screenshots of live view to mobile device



View saved recordings on local storage (Requires Micro SD card)



Save recordings of live view to mobile device



Customize motion detection settings



Talk

Enable microphone for one-way or two-way talk



Control light and set lighting schedules



Dial 911 for emergencies Emergency



Subscribe to cloud storage package (Android only)



works with **Hey Google**



WORKS WITH alexa

Appendix: Camera LED Guide

NO.	LED Status	Camera Status
1	Red LED on	System starting up
2	Blue LED blinks	Standby for configuration
3	Red LED blinks	Network pairing
4	Blue LED on	Camera online



FCC INFORMATION: This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. Warning: Changes or modification to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. NOTE: This equipment has been tested and found to comply with the limited for Class B digital device, pursuant to Part 15 of the FCC Rules. Their limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If the equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -Reorient or relocate the receiving antenna.
- -Increase the separation between the equipment and the receiver.
- -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- -Consult the dealer or an experienced radio/TV technician for help.

Register & Subscribe today to protect your investment and join our email list!



Why Register?

- · Receive your extended warranty
- · Get professional warranty support
- Be the first to hear the latest product news.
- Get exclusive deals delivered to you email.

Scan below for link:



homezonesecurity.com support@homezone-usa.com US: +1 888-303-7647

Get exclusive offers and deals when you subscribe!

Thank you for choosing Home Zone Security! We are here to support you every step of the way. Please be sure to contact our customer support for troubleshooting and register your product for additional benefits. Products must be sold by an authorized reseller or distributor to be valid.