

Assembly, Operating, and Maintenance Instructions



Vastex International, Inc. 7 Emery Street Bethlehem, Pa. 18015 USA Phone# 610 625-2702 Fax# 610 625-2775 Web Site <u>www.vastex.com</u>

	Pg #	Certificatio
Safety	2	The Nether Tel : + 31 (
Assembly/Operation	3-7	Fax : + 31
Drive Chain	8	Vastex E
Troubleshooting	9	Purchasing sales@va
Warranty	10	Electrical S stech@va Tech Supp techsuppo

Date:___/__/__

Authorized Representative in Europe: Certification Experts BV Nieuwstad 100 1381 CE Weesp, The Netherlands Tel : + 31 (0) 294 – 48 33 55 Fax : + 31 (0) 294 – 41 46 87

Vastex E-mail assistance
Purchasing & Product Info: sales@vastex.com
Electrical Support: stech@vastex.com Tech Support, Mechanical Setup, and Operation:
techsupport@vastex.com
Screen Printing Issues & Support:
printech@vastex.com

(Please log your machine's serial number and date of purchase for future reference.)

Serial Number: VTX

Safety Instructions


- The operator should read and understand the instruction manual before operating this equipment. Store instruction manual and safety instructions near equipment for easy access to operators.
- VASTEX Screen Coater is intended for the coating of screen printing screens. Do not use for any other purpose unless authorized by Vastex International, Inc. Use of this equipment for any other purpose can be dangerous and may cause damage to this equipment voiding the warranty.
- It is recommended that the area around this equipment be designated as a work area and only authorized employees are allowed in this area.
- Children and pets must be kept clear from the work area.
- Operator must be familiar with operation of the screen coater.
- Operator must not wear loose or dangling clothing or jewellery.
- Only qualified technicians should be allowed to make repairs on the VASTEX C-1000.
- The C-1000 should not be loaded with a screen larger than 36" or with a weight exceeding 10 lb.

- Maintenance —

- 1) Every month, inspect the Screen Coater for loose bolts and tighten if necessary.
- 2) Every 2 months, a drop of machine oil should be applied to the wheels on the screen carriage, and the drive rack itself.
- 3) Every 3 months, electrical connections should be checked for tightness and any corrosion.

- Power Info -

• C-1000 requires a standard 5-15R receptacle and draws 1Amp.



Placing your equipment into service and use

To place your C-1000 into service, and operate:

- 1.) Review and comprehend the entire manual.
- 2.) Follow steps 1 through 5 on pages 3,4, and 5 (Assembly/Operation)

Stability information —

This equipment is designed and expected to be stable during all foreseeable conditions, provided that the cautions and instructions in this manual are followed. Do not place any objects on moving parts except where approved.

-Safe transport, handling, and storage —


This equipment is designed to be as safe as possible under all foreseeable conditions of transport, handling, and storage. Be certain to switch the equipment off, unplug it, and secure all moving parts if the machine is to be transported after installation. When handling your machinery, be aware of the following weights: **C-1000 55lb(25kg)**

Assembly/Operation -

Each installation may be unique. Vastex recommends securely attaching your C-1000 to a wall or sturdy structure. Vastex supplies each C-1000 with various hardware to attach the unit to a wall. The method shown here is our recommendation.

1) Your C-1000 comes fully assembled from the factory. 2) To put into use, mount the machine to a stable vertical surface. Most users will mount to a wall in their shop. 8.1" *Depending on distance between studs, an 18" long 2"x4" 20.5cm (or equivalent) should be added to bridge two wall studs. 2"x4"x18" **Upper Screen Holder** Screen Carriage 54.75" 3) Use standard wood screws to fasten the 2"x4" wood 139.1cm pieces to the wall. Use lagging screws to attach machine to the 2"x4" for a firm attachment. **Control Box** Lower Screen Holder Foot Pedals 6.875" 17.5cm

Assembly/Operation

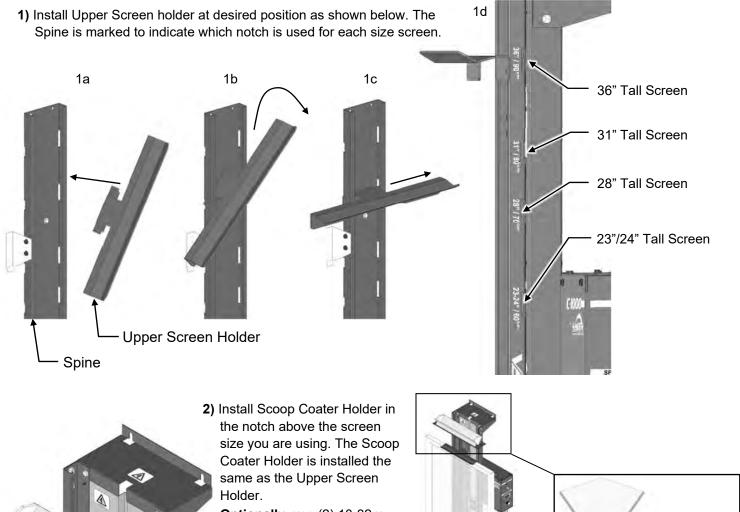


Sa Ha Or 1/2 ed the

Optionally, use (2) 10-32 x 1/2" Bolts and (2) 10-32 Serrated nuts to install at the top of the Spine.

Scoop Coater
Holder


(Above) Scoop Coater Holder installed.

3) To install a screen onto the C-1000, install the Upper Screen Holder at the appropriate position (See Step 1). Then push down on the Lower Screen holder with the bottom of the screen, pivot the screen in, and guide it into the Upper Screen Holder.






Assembly/Operation

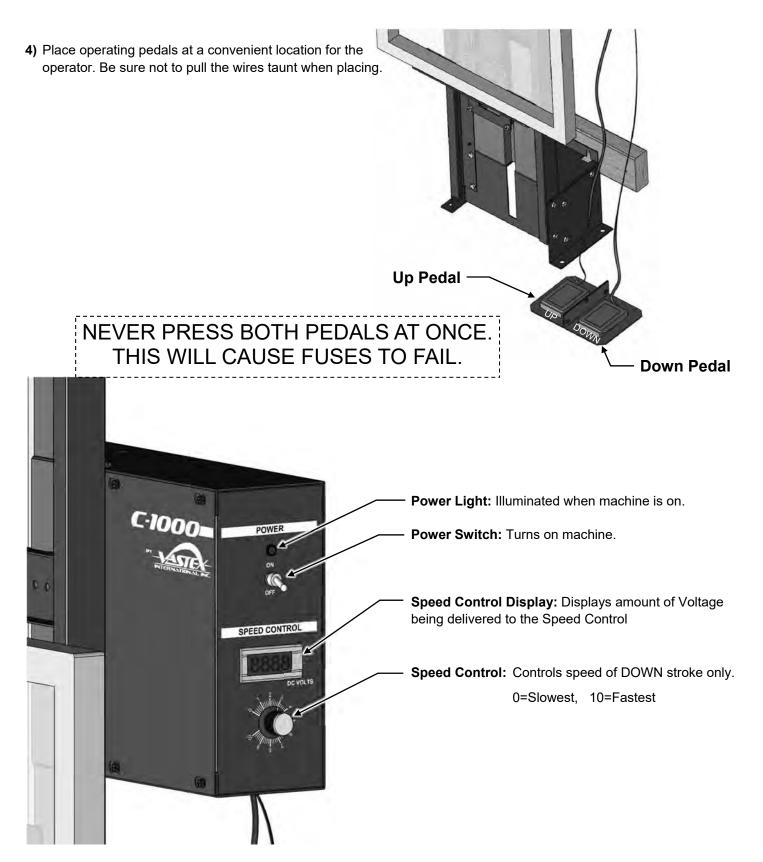

5) After reading and comprehending this manual in it's entirety, plug the machine in to begin operation. See **Page 2** for electrical requirements.


Assembly (Optional Stand) _____

Your C-1000 comes with the option of adding on a floor stand to turn the screen coating unit into a floor standing model.

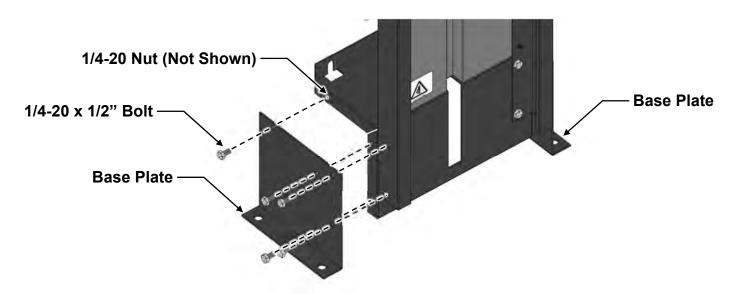

1) Remove the existing base plates by removing (10) 1/4-20 x 1/2" bolts and nuts from each side of the machine. Set hardware aside.

2) Install the new, larger base plates with the (10) 1/4-20 x 1/2" bolts and nuts from Step 1 on each side of the machine.

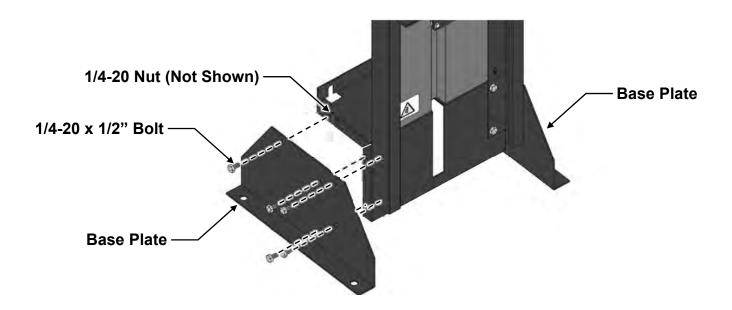


Assembly (Optional Stand) —

3) Flip the Floor Stand upside down and place the (4) strips of Grip Tape on the bottom as shown bellow.




4) Install the Floor Stand on to the bottom of the C-1000 using (6) 3/8-16 x 3/4" bolts, washers, and nuts.

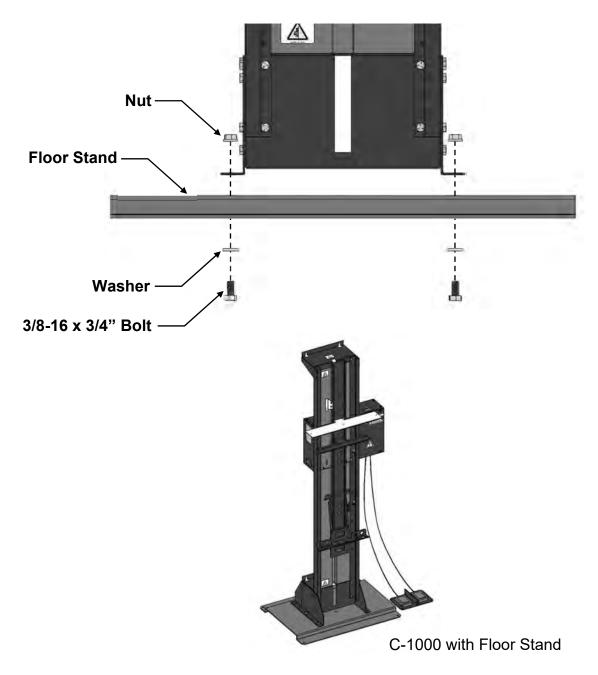

Drive Chain

Caution! The machine must be unplugged before adjusting or checking the drive chain, or entering the control box. The red Power Light labeled "Power" must be off!! A qualified electrician should perform any internal testing requiring power on!

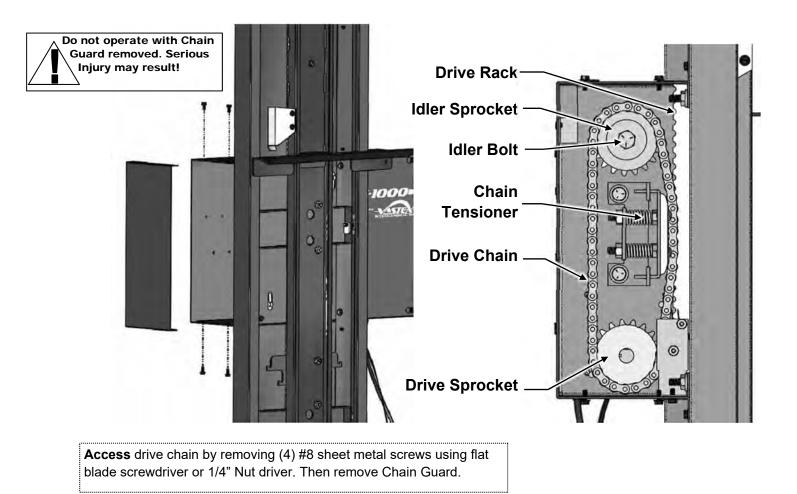


<u>Chain Tension</u>: The spring tensioner seen above will automatically set the appropriate amount of chain tension required for proper operation of the machine. It is important to regularly inspect the chain to determine the chain is properly tensioned, and not sagging. The C-1000 carriage is designed to slip if an obstruction is present during travel. If the carriage slips under normal operation, please contact Vastex technical support.

Drive Sprocket (checking): There are (2) Set Screws holding the drive sprocket onto the motor's shaft. These set screws should be checked periodically, depending on amount of use. Use a small 5/32" Allen wrench to tighten each set screw. The Screen Carriage will need to be manually moved up or down to check/ tighten the Set Screws.

- Troubleshooting

Screen Carriage does not move up or down: Check the fuses behind the right access panel on the control box. To access the fuses, loosen the (4)#8 Sheet Metal Screws, and slide the cover to the right, then off.

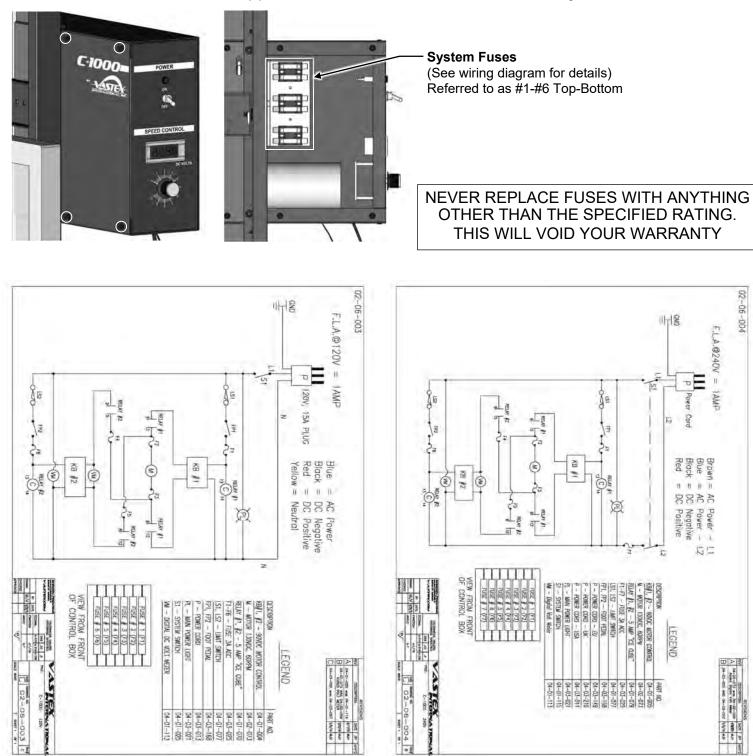

120v Wiring Diagram: 02-06-003

240v Wiring Diagram: 02-06-004

02-06-004

Vastex Warranty

Doc#01-00-005D Revised 2/20/2018

(1.) Vastex, hereinafter referred to as "seller" warrants only to its original "purchaser", who holds a copy of the original invoice and is the original end user of the equipment in question, its new equipment against manufacturer defects in materials or workmanship on a pro-rated basis. Warranty period begins from date of shipment to the buyer and will only apply to customers paid in full. Warranty periods are as follows: one (1) year for E-1000, three (3) years for all other complete machines (including F-Flash), fifteen (15) years for infrared heaters (excluding F-Flash) installed by Vastex in a new dryer, three (3) years for replacement infrared heaters (excluding 1 Flash) installed by Vastex in a new dryer, three (3) years for replacement infrared heaters, and one (1) year for replacement parts. Rubber blankets, light bubbs and glass on exposure units are particularly subject to wear while in use. Wear is not covered by this warranty but as stated above only manufacturers defects are covered. All sales made through Vastex dealers must be certified by that dealer before a warranty replacement is issued. All equipment is thoroughly tested and inspected before packaging. This warranty does not cover minor cosmetic damages that occur during shipment that do not affect the functionality of the equipment.

(2.) This warranty is expressly contingent upon the buyer delivering to seller, at the address below, with all transportation charges prepaid, the part or parts claimed to be defective within the above mentioned warranty periods stated in paragraph one. The defective part or parts will be repaired or replaced at the discretion of Vastex International, Inc. If the equipment in question is less than one (1) year old, it will be shipped to the customer at no charge, with an RGA issued by Vastex for the defective part. The defective part must be shipped back to Vastex freight prepaid within 30 days or the account will be billed. If the equipment is more than a year old, the part will be shipped after we receive the defective part. If it's necessary to expedite the movement of parts and to minimize down time to the buyer, the replacement part shall be supplied on a C.O.D. basis. If testing and analysis of said part by the seller or its supplier discloses that said part is defective, the cost of said part will be refunded to the buyer on a prorated basis.

(3.) Except as otherwise provided herein, the equipment is being sold "as-is". Final determination of the suitability of the equipment for the use contemplated by the buyer, is the sole responsibility of buyer, and seller shall have no responsibility in connection with the suitability.

(4.) All warranties implied by law, including the implied warranties of merchantability and fitness are hereby limited to manufacturer defects in materials or workmanship during the warranty period stated in paragraph one. The express warranty and remedies contained herein and such implied limited warranties are made solely to the sole warranties and remedies and are in lieu of all other warranties, guarantees, agreements, and other liabilities, whether express or implied, and all other remedies for breach of warranty or any other liability of seller, in no event shall seller be liable for consequential damages.

No person, agent, distributor, or service representative is authorized to change, modify or extend the terms hereof in any manner whatsoever. These terms and conditions are an essential part of the transaction between the parties and constitute the entire agreement between them with respect to the same. Some states do not allow limitation on how long an implied warranty lasts of the exclusion or limitation of incidental, or consequential damages, so the above limitation may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Infrared heaters are the only replacement parts covered for a period of (3) years from date of shipment and contingent to receipt of payment in full.

Electrical components cannot be returned once installed unless proven defective.

Please refer to doc. 01-00-015 for specific terms and conditions of sale and the limited warranty. Please refer to doc. 01-00-017 for V-2000HD printer warranty.

Updates: V1000 to 3 year warranty 01/09/12, Heater warranty to 15 years 01/02/2012.

TERMS AND CONDITIONS OF SALE AND LIMITED WARRANTY Doc.#01-00-015

- Buyer's order will constitute an offer in accordance with the terms hereof and such offer, upon acknowledgment of Seller, will constitute the agreement between Buyer and Seller. Buyer's order after such acknowledgment by Seller will not be subject to cancellation, change or reduction in amount, or suspension by Buyer of deliveries, unless prior to such action Buyer has obtained Seller's written consent. Notwithstanding anything to the contrary in Buyer's Purchase Order or other communications, the parties agree to be bound by 1 these Terms and Conditions. Acceptance of the product by the Buyer shall be deemed to constitute unconditional acceptance of these Terms and Conditions.
- 2.
- Any of these terms, conditions and provisions of Buyer's order which are inconsistent with Seller's acknowledgment and these Terms and Conditions of Sale shall not be binding on the Seller and shall be considered not applicable to any sale so made. No waiver, alteration or modification of any of the provisions on either side of the document shall be binding upon Seller unless agreed to in writing by Seller. (a) All prices are F.O.B. Seller's Plant and method of delivery and routing shall be at Seller's discretion, unless specifically otherwise stated herein. Notwithstanding any agreement to pay freight, delivery of products purchased hereunder to a common carrier or licensed trucker shall constitute delivery to Buyer and be determinative of the date and time of shipment and all risk of loss or damage in transit shall be borne by Buyer. If the Buyer fails to accept the goods from the common carrier or licensed trucker, the Seller shall be entitled to claim payment from the Buyer. Seller shall arrange for storage, the risk and the cost, including insurance costs, to be borne by the Buyer (and Buyer agrees to pay such as the agreement delivery to determent) around if the failure to accent delivery of the acceptione protection by the Buyer (and Buyer agrees to pay such the section of storage). 3.
- entitled to claim payment shall be used to be in tearing for storage, the risk and the cost, including insurance costs, to be borne by the Buyer (and Buyer agrees to pay such amounts upon demand) except if the failure to accept delivery is due to any of the exceptions noted in Paragraph 4. (b) Terms of payment shall be as stated on invoice. It is understood that deliveries will be made in accordance with Seller's regular production schedule. Every reasonable effort will be made to meet the Buyer's required delivery dates but Seller will not be liable for damages or be deemed to be in default by reason of any failure to deliver or delay in delivery due to any preference, priority, allocation or allotment order issued by the Government, whether Federal, State or local, or causes beyond its control including but not limited to, Acts of God or a public enemy, acts of Government, fires, floods, epidemics, quarantine restrictions, strikes, lockouts, freight embargoes, severe weather, unavailability of materials or shipping space, delays of carriers or suppliers or delays of any subcontractors. Should delay in delivery be caused by any of the circumstances mentioned in this paragraph, damages will be limited to cancellation of the purchase order without penalty, and refund of any monies deposited or prepaid on the purchase order with no liability for any consequential or incidental damages. Seller reserves the right to increase the prices prior to Seller's acceptance of order and/or after expiration of any price quoted by Seller. Unless otherwise stated in writing, Seller's prices do not include sale, excise, value-added or other taxes. Consequently, in addition to the price specified herein, the amount of any present or future sales, use, excise, value-added or other taxing authorities. Seller reserves the right, at any time, to revoke any credit extended to Buyer because of Buyer's failure to pay for any products when due or for any other reason deemed good and sufficient by Seller and in such event, all subsequent 4
- 7.
- 8 INCLUDE BUYER'S MANUFACTURING COSTS, LOST PROFITS, GOODWILL, OR ANY OTHER SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES, ARISING OUT OF THE AGREEMENT, THIS CONTRACT, THE SALE OF THE PRODUCTS TO THE BUYER OR THE USE OR THE PERFORMANCE OF THE PRODUCTS. Seller may at its discretion repair, replace or give the Buyer credit (pro-rated) for such defective products. (b) Notwithstanding anything herein to the contrary, Seller shall have no liability for alleged defects with the products which are not specified in written notice from the Buyer to the
 - Seller within thirty-six (36) months from the date of shipment of machines. Seller shall pass to Buyer any warranty received by Seller from the manufacturer of Limited Life
 - Components, which in most cases is 12 to 18 months. (c) Seller shall have no liability under this Limited Warranty unless Buyer has paid in full for the products. Further, this Limited Warranty is expressly contingent on Buyer's (d) SELLER SPECIFICALLY EXCLUDES ALL WARRANTIES, EXPRESSED, IMPLIED OR OTHERWISE, EXCEPT AS STATED EXPLICITLY IN THESE TERMS AND CONDITIONS OF SALE. SELLER DISCLAIMS THE WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.
- 9. The remedies herein reserved by Seller shall be cumulative and in addition to any other legal remedies. No waiver of a breach of any portion of this contract shall constitute a waiver of continuing or future breach of such provision or of any other provisions hereof.
- These Terms and Conditions constitute the entire agreement of the parties. No amendments, changes, revisions or discharges hereof in whole or in part shall have any force or effect unless set forth in writing and signed by the parties hereto. This contract shall not be assignable by Buyer voluntarily by operation of law or otherwise without Seller's written 10 consent
- 11.
- This contract shall be governed and shall be construed according to the domestic laws of the Commonwealth of Pennsylvania. Anything herein to the contrary notwithstanding, any action for alleged breach by Seller of the contract between the parties, including but not limited to any action for breach of the warranties herein set forth, shall be barred unless commenced by Buyer within one (1) year from the date such cause of action accrued. 12.
- This agreement shall inure to the benefit of and be binding upon the parties hereto, their respective successors and permitted assigns. 13
- All notices required by this contract to be given by either party shall be sent in writing or by facsimile and shall be addressed to the last known address of such other 14 party. Notices shall be deemed to have been received on the fifth business day following deposit in the mail.