


Wireless IP Camera User Guide




Content

1. How the camera works	1
2. How to set up the camera	1
2.1 Install App and create App account	1
2.2 Plug camera to power	2
2.3 Add camera to App	3
3. App - Camera list & Group Cameras	4
4. App - Live Footage	5
5. App - Video Playback	6
6. Camera Settings	7
7. Motion Detection Management	8
8. Record Schedule	8
9. Advanced settings	9
10.Share Videos & Snapshots from phone	10
11.Me - App Overall Settings	11
12.Pair the Camera to a xmartO NVR	12
13.Specifications	13

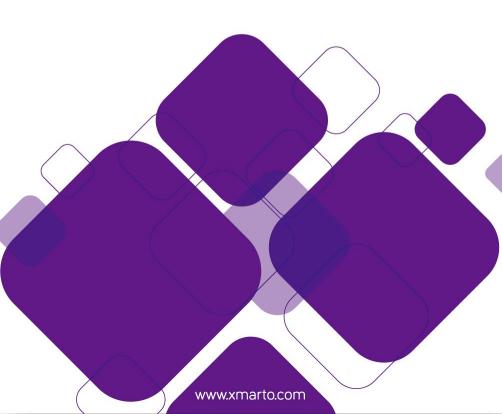

1. How the camera works

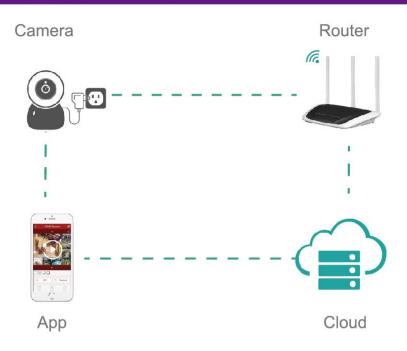

2. How to set up the camera

2.1 Download App XMARTO Wallpixel, spend a few minutes to register an user account and login.

You can scan below QR code to find the Apps.



xmartO WallPixel



ios



Android 🚛



2.2 Bring the camera close to your Wi-Fi router, plug it into power.



2.3 In App,tap + to add camera.

Select your camera type, follow on-screen guide to add the camera. When it's done, the camera will display in your camera list. Tap to view live footage. (Default IPC WiFi password is 11111111 if it requires any)
















If the camera was not added successfully, hold the reset button for 5 seconds and do it again. Make sure to provide CORRECT WiFi hotspot and password. (2.4G WiFi only)



3. App - Camera list & Group Cameras

- ① Group. With group, you can group multiple cameras to a quad view or multiple view. Then you can view multiple cameras simultaneously with one tap.
- One key Switch At Home/ Away Mode.
 At home mode owner is at home, camera DOES NOT RECORD
 Away mode owner is away, camera records.
- (3) Camera name, network status
- 4 Quick menu to recorded photos & videos, edit/ delete camera.

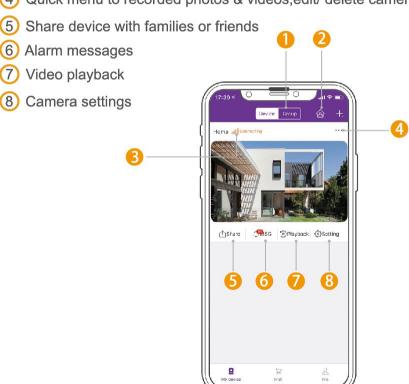


Group cameras to multi-view: In Camera list, tap Group - Add group - select cameras to form a group. Each group can have up to 16 cameras.



4. App - Live Footage

In camera list, tap a camera to enter its live footage.

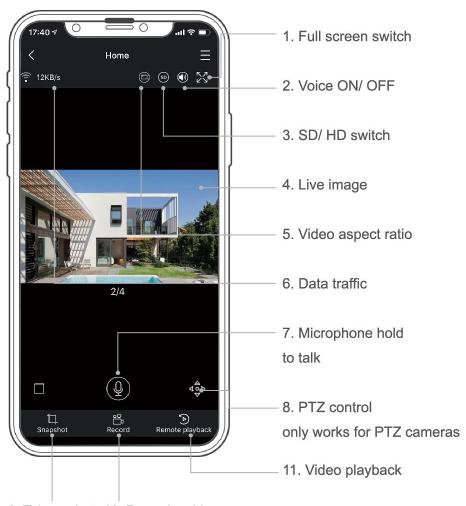


9. Take a photo 10. Record a video to mobile clip to mobobile



5. App - Video Playback

In camera list, tap Playback to play camera's recorded videos. Make sure you have Micro SD card in the camera.

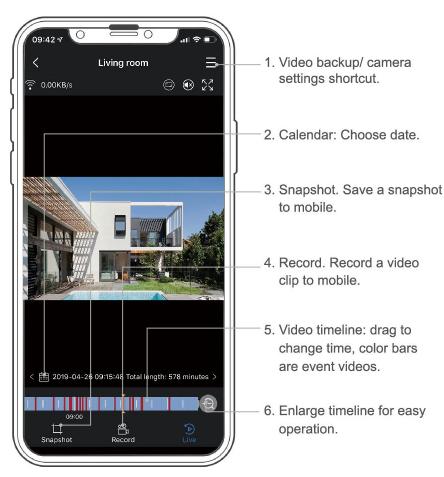


Note: Use class10 micro SD card for camera storage, or obtain Cloud Storage in App - Me - Cloud Mall. Check SD card status in setting - Device storage.



6. Camera Settings

In camera list, tap Setting to enter camera settings.

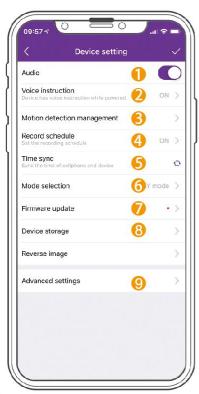

- 1 Audio ON/ OFF
- Voice instruction voice guide settings
- Motion detection settings
- 4 Record schedule settings
- Sync camera time with your mobile

6 Mode selection – detect & record plans while user is away/ at home.


At home mode – owner is at home, camera DOES NOT RECORD

Away mode – owner is away, camera records.

- 7 Firmware update for camera
- 8 Device micro SD card storage status
- Advanced settings



7. Motion Detection Management

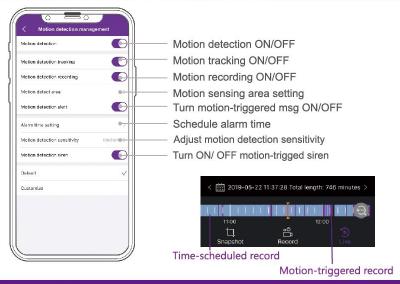

8. Record Schedule







9. Advanced settings



In advanced settings, you can set timezone, video image, Device username and password.

In Device WiFi, you can update the camera's WiFi connection.



10. Share Videos & Snapshots from phone

While watching live footage or playback, you can save snapshots or video clips to your phone for sharing.









11. Me – App Overall Settings





- 1. Tap profile photo to enter App account settings; includes email, phone number and change App login password.
- 2. Setting App push alert ON/ OFF and other app settings.
- 3. Snapshot/ Record. Access photos & videos you saved to mobile.
- 4. Device share management. Manage device sharing.
- 5. Push notification. Turn App notification ON/ OFF.



12. Pair the Camera to a xmartO NVR

1. Hold the reset button to bring the camera to configuration mode.



2. On the NVR, right click - Add Cam by WiFi. Within a minute, the camera will be paired to the NVR.



Tips: please make sure your NVR has at least one empty channel.



13. Specifications

Sensor	1/3" CMOS
Video Stream	Main: 2304*1296, Sub: 640*360
Video Compression	H.264/ H.265
Audio	G.711, 2-way Audio
Storage	Micro SD card, max.128GB; Cloud Storage (optional)
Night Vision	IR Night Vision
Protocol	TCP/IP, HTTP, UDP, DHCP, DNS, NTP, RTSP, P2P
Power in	5V DC
Power Consumption	≤ 5W
WiFi	2.4G WiFi 802.11 b/g/n

Note: While using the product, please comply with your local laws and regulations of audio & video devices.			
If you have further questions, please refer to help center at, www.xmarto.com or contact us at support@xmarto.com Thank you!			
www.xmarto.com	support@xmarto.com		