



Countryside  
Landowners  
Security

# CAMERA PRESETS FUNCTION MANUAL



Using a the Camhipro app you can set up preset positions.


This is will allow you to automatically pan to different positions.

You can quickly check activity at all your points of interest.

Moving to preset positions is only available with the CLS Revo 360 camera.

To set up presets:

- Open Camhipro app
- Select the camera
- Scroll to screen three
- Select 'Preset Positions'

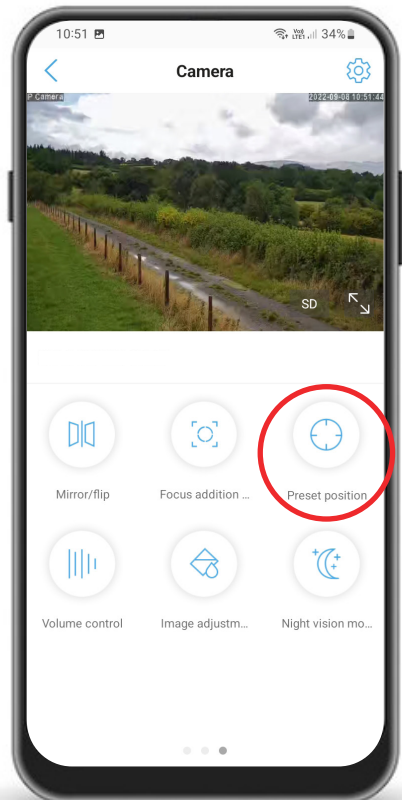

# Contents

---

- Set Home Position .....4
- Set Multiple Presets .....5
- Set Human Tracking .....6
- Set Rotation Speed .....7
- Auto Pan To Presets .....8
- Auto Pan 355 Degrees .....9
- Reset Presets .....10

# Set Home Position

To set a preset use **Screen 2** to move camera into position.

Navigate to **Preset Position** screen.


Enter **1** and then press **Setup/Setting**

Clear the keypad


Enter **99** and then press **Setup/Setting**

Navigate to screen 2 and move the camera to a new position. After approx 10s it'll return home.

**Screen 2**

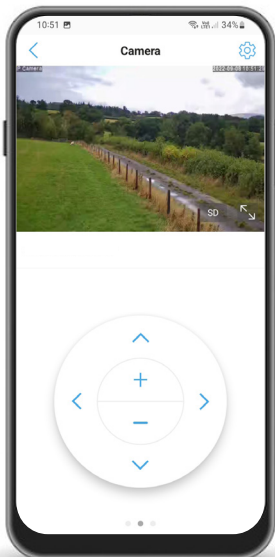

**Preset Position**

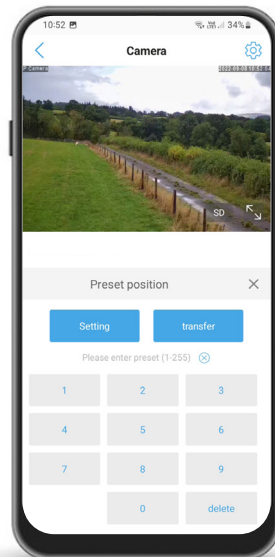

# Set Multiple Presets

Use **Screen 2** to move camera into position.

Navigate to **Preset Position** screen.


Enter **1** and then press **Setup/Setting**

Move camera to 2nd position


Enter **2** and then press **Setup/Setting**

Two positions have now been assigned. To move the camera back position 1, Enter **1** and then press **Call/Transfer**.

**Screen 2**

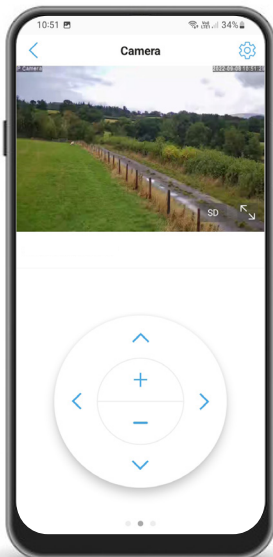

**Preset Position**

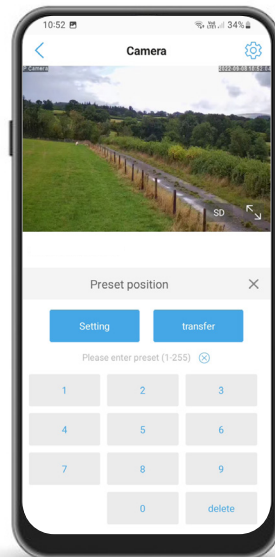

# Set Human Tracking

Navigate to settings - highlighted below.

‘Alarm management and notifications’.

Turn on ‘Humanoid Alarm’ - highlighted below.


To **turn on** enter **100** and press **Call/Transfer**.

To **turn off** enter **103** and press **Call/Transfer**.


Navigate to **Preset Position** screen.

Your camera will now track human movement.

## Alarm Notifications

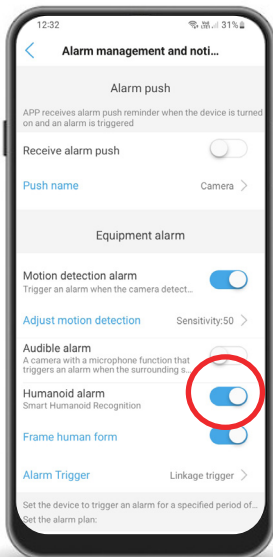

## Preset Position

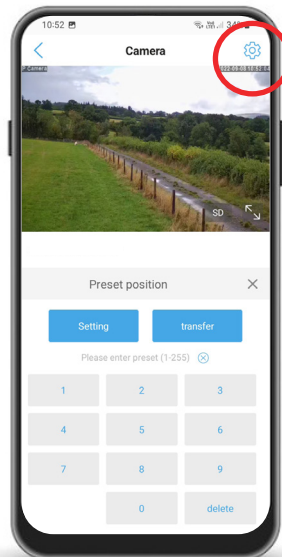

# Set Rotation Speed

Change the rotation speed of your camera.

Enter 113 and press **Setup/Setting**.


Message '**The preset is set successfully**' will appear.

Clear the keypad.

Enter a number between **1-64** and press **Call/Transfer**.

Higher numbers are faster speeds.

## Preset Position

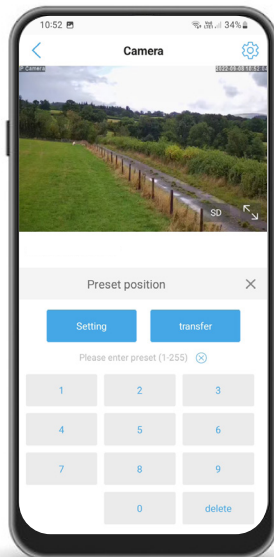

# Auto Pan To Presets

Use **Screen 2** to move camera to chosen point.

On Preset Position screen enter 81 and press **Setup/Setting**.


Use Screen 2 to move camera to second point.

On Preset Position screen enter 82 and press **Setup/Setting**.


Clear the keypad

Enter 141 and press **Call/Transfer** to enable.

**Screen 2**

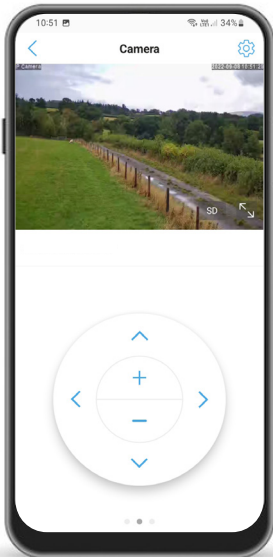

**Preset Position**

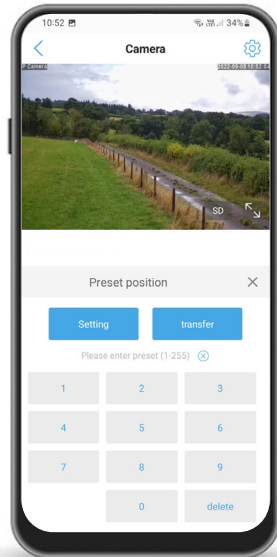




# Auto Pan 355 Degrees

On Preset Position screen enter 120 and press **Call/Transfer** to start auto panning.

On Preset Position screen enter 104 and press **Call/Transfer** to stop auto panning.

Your camera will now automatically perform a 355 rotations.

## Preset Position

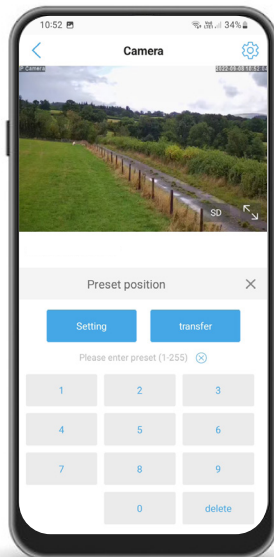


# Reset Presets

---

On Preset Position screen enter 104 and press **Call/Transfer**.

All presets will be removed from your camera.

## Preset Position

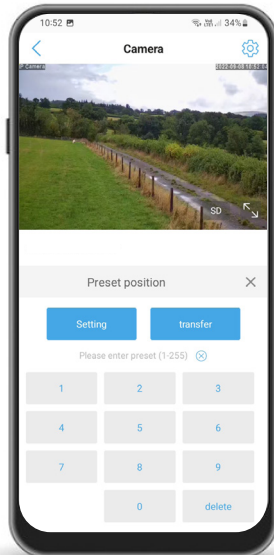

# Contact Details

---

If you are still having difficulties please contact us at:

E: [sales@clsonline.co.uk](mailto:sales@clsonline.co.uk)

T: 03309127424