

## How many EcoFlow solar panels can I connect?




EcoFlow 220W Bifacial Portable Solar Panel

Connectivity (series/parallel)	Number of Panels	Input Voltage	Low-/High-PV Port	Remark
Series only	2	43.6	Low-PV	Low temperature may cause the risk of overvoltage, thus, connecting 6 panels in series is not recommended.
	3	65.4	Low-PV	
	4	87.2		
	5	109	Low/High-PV	
	6	130.8	Low/High-PV	



EcoFlow 400W Portable Solar Panel

Connectivity (series/parallel)	Number of Panels	Input Voltage	Low-/High-PV Port	Remark
Series only	2	96	Low/High-PV	Low temperature may cause the risk of overvoltage, thus, connecting 8 panels in series is not recommended.
	3	144	High-PV	
	4	192		
	5	240		
	6	288		
	7	336		
	8	384		

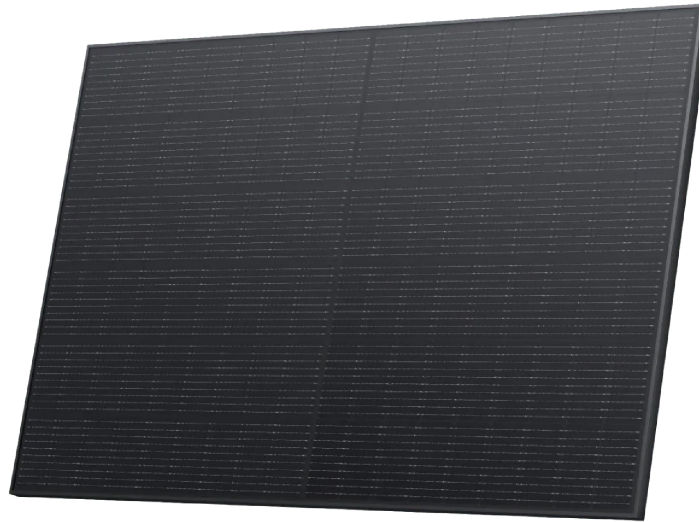

EcoFlow 400W Rigid Solar Panel

Connectivity (series/parallel)	Number of Panels	Input Voltage	Low-/High-PV Port	Note
Series only	2	74.2	Low-PV	Low temperature may cause the risk of overvoltage, thus, connecting 10 panels in series is not recommended.
	3	111.3	Low/High-PV	
	4	148.4	High-PV	
	5	185.5		
	6	222.6		
	7	259.7		
	8	296.8		
	9	333.9		
	10	371		