




**Electronic Security Home safe / RPESA Series
Instruction Manual**


RPNBSafe delivers security exactly where you want it.

ESA Series




RP20ESA

0.3 Cubic Feet

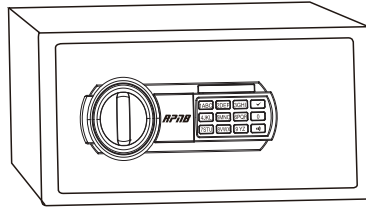


RP23ESA

1.0 Cubic Feet




RP25ESA

0.5 Cubic Feet




RP36ESA

1.2 Cubic Feet



RP42ESA





1.5 Cubic Feet

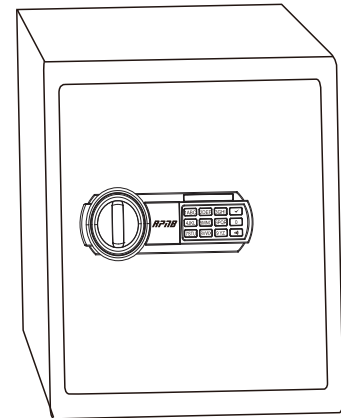

RP50ESA

1.8 Cubic Feet

Box Contents

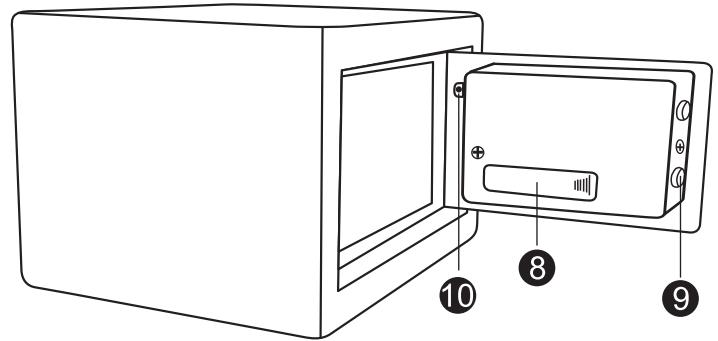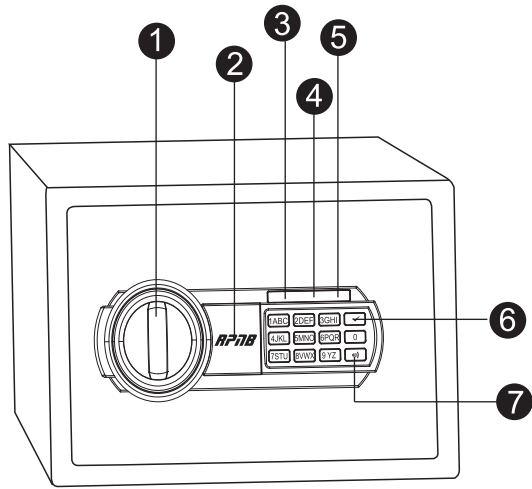

- ❶ Knob
- ❷ Backup Key Cover
- ❸ Red Light
- ❹ Green Light
- ❺ Yellow Light
- ❻ Confirming Button
- ❼ Voice Button
- ❽ Battery Compartment
- ❾ Bolts
- ❿ Program Button
- ⓫ Backup Keys (2)
- ⓬ Expansion Screws
- ⓭ Owner's Manual/Quick Start Guide

Warnings

To prevent damage to your RPNB® unit or injury to yourself or to others, read the following safety precautions before using this unit.

**DO NOT PLACE OR STORE THE BACKUP KEYS INSIDE THE SAFE AT ANY TIME.
IF THE BATTERY FAILS, YOU WILL BE UNABLE TO OPEN THE SAFE.**

DO NOT expose to extreme heat or cold. Battery power may be affected.

DO NOT store loaded guns in this unit. Firearms are serious in nature and must be handled with respect. Store responsibly.

ALWAYS check to make sure the safe has locked and closed when it is not in use.

Disclaimers

Neither seller nor manufacturer shall be liable for unauthorized access, any injury, loss or damage to personal property direct or consequential, arising out of the use of, or the inability to use the RPNB® Safe.

The user shall determine the suitability of the RPNB® Safe before the intended use and user assumes all risk and liability whatsoever in connection therewith, RPNB® Safe are not intended to protect against environmental hazards including fire and water.





Be sure and follow all local and state firearm laws.

DO NOT operate a firearm without proper training and experience.

Opening the Safe with the Backup Key


Upon first receipt of the safe, or either the electronic circuit malfunction or codes unknown. You could also use the backup key to open the safe.

- 1 Remove the cover of the backup lock. (see Figure A&B)
- 2 Insert the backup key, turn it counterclockwise (see Figure C), then turn the knob clockwise to open the door (see Figure D).

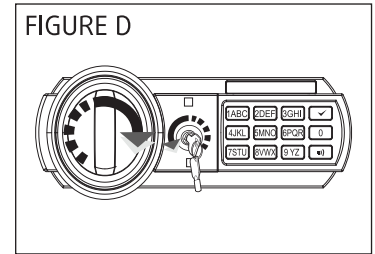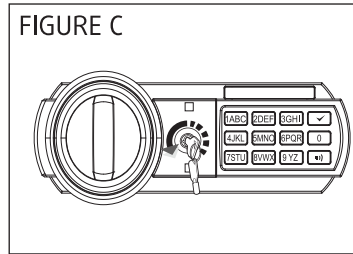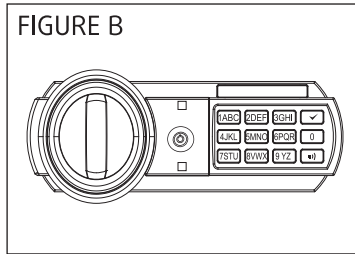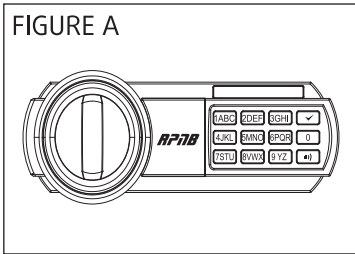

Battery Installation

- 1 Open the battery cover and insert the 4 AA alkaline batteries (not included) into the battery compartment. Note that pay attention to the "+" and "-" signs. The "-" end of the batteries go against the spring inside of the compartment(see Figure E).
- 2 When the batteries are inserted correctly, the indicator light will light up green once with one beep.
- 3 Place the batteries cover, you are now ready to program your safe.


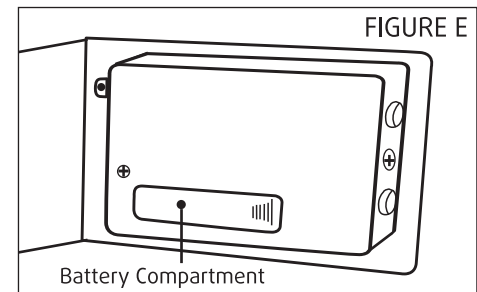


IMPORTANT: Use the NEW AA alkaline battery. Using other batteries may cause unusable conditions. New batteries can not be used with old batteries together.

Master Code Programming

First time users should change the default code as soon as possible to prevent unauthorized access to your safe, so it should be kept confidential.

- 1 Enter default code 1-5-9 on the keypad then press confirming button "✓" to open your safe.
- 2 With the safe open, press the "Program Button" once and release it (see Figure F), the green light will light up once with the one beep.
- 3 Enter your NEW master code. Your code can be a minimum of 3 and a maximum of 8 digits.
- 4 Press the confirming button "✓" (see Figure G) once and release it, the green light will light up twice with the double beeps. This tone confirms that the password has been reset.
- 5 Now test the code. If you make a mistake and the new code will not work (the red light will light up thrice with three beeps if the incorrect entry is made.), simply start over with step 2.

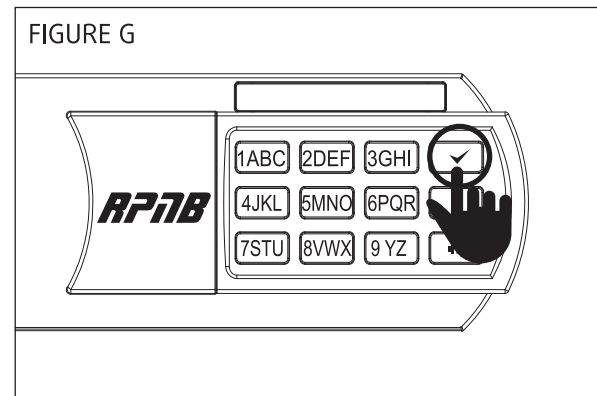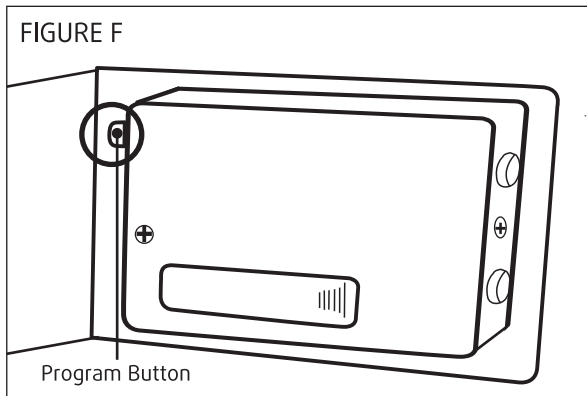

Master Code Programming

TIP: Code Requirements

- After enter your password please press confirming button "✓" to open safe.
- The red light will light up thrice with three beeps if the incorrect entry is made.
- For your security, the red light will light up five times with five beeps if 3 incorrect entries are made, and the safe will time out and sleep for one minute.
- And the safe will time out and sleep again for another five minutes if 1 more incorrect entries are made. The safe can still be opened by using the backup keys.
- Programming a new code will overwrite your previous code.
- Please reset your password after every time you change the batteries.

Silence Mode Setting


To silence the audible sound of the electronics, press the "Voice Button" one time, the green light will light up once. To turn the sound back on repeat the above step (see Figure H).

Low Battery Warning

If the yellow light will light up twice with 2 beeps when opening the safe by electronic way, your battery level is critically low and your safe needs to be replaced the 4 new batteries.

IMPROTANT: Use the NEW AA alkaline battery. Using other batteries may cause unusable conditions.

FIGURE H

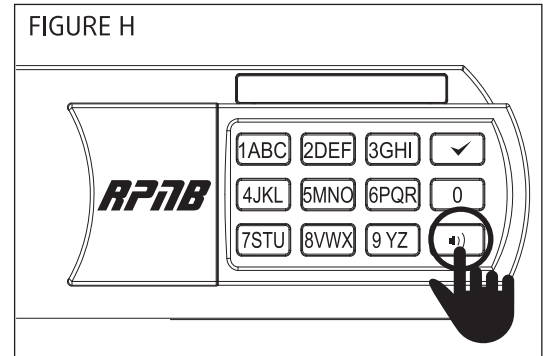

Locking the Safe

Turn the knob counter clockwise to close the door.

Securing Your Safe

There are some mounting screws included to mount your RPNB® safe to a flat surface using the pre-drilled holes on the bottom.

Using the Mounting Screws

TIP: Make sure you have enough clearance for the lid to open properly before mounting the safe.

- 1 Position the safe on a flat surface where you want to mount it.
- 2 Use a pencil to mark the holes for drilling.
- 3 Drill pilot holes.
- 4 Position safe in place and install screws through safe into pilot holes. Tighten screws.

IMPORTANT:

Use the expansion bolt when there is a concrete wall surface. Use the clamping screw when there is a wooden wall surface.

How shall I view tutorial videos?



RPNB[®]

<http://www.rpnbsafe.com>

- 1 Go to our website via: **www.rpnbsafe.com**
- 2 Select the "**Customer Service**" on the navigation bar
- 3 Click "**How To Video**"
- 4 Select the product model you purchased

How shall I replace keys?

- 1 Go to our website via: **www.rpnbsafe.com**
- 2 Select the "**Customer Service**" on the navigation bar
- 3 Click "**Replace Keys**"
- 4 Fill in the required information

How shall I order accessories?

- 1 Go to our website via: **www.rpnbsafe.com**
- 2 Select the "**Customer Service**" on the navigation bar
- 3 Click "**Order Accessories**"
- 4 Fill in the required information

 More online at www.rpnbsafe.com under support

Customer Support/Warranty

Customer Support

If you have a problem with your RPNB® safe that is not answered in the FAQ section of this manual, we encourage you to email us: CUSTOMERSUPPORT@RPNBSAFE.COM

Linked Warranty (Terms and Conditions)

RPNB® is committed to building high quality products and will make every effort to ensure our products are free from any defects. We guarantee your safe will be free of defects in materials or workmanship for a period of one year from the date of original. This warranty does not cover abuse, misuse, use in any manner for which is not designed, neglect, modification, damage in advertently caused by the owner; accidents, and/or tampering.

If your safe is determined to be defective and we are responsible for the cause we will have it repaired at our expense, or we will send a new replacement at no cost to you. You will be required to return your existing unit as well as all included accessories to RPNB® prior to replacement of the defective unit along with your order of purchase.

If it is determined your safe needs to be returned our customer support team will provide you with a return detail.

Please have the following information available when contacting us:

- Purchaser's name and mailing address, email address, and phone number
- Online order number
- Detailed description of problem

NEITHER SELLER NOR MANUFACTURER SHALL BE LIABLE FOR ANY INJURY, LOSS OR DAMAGE, DIRECT OR CONSEQUENTIAL, ARISING OUT OF THE USE OF, OR THE INABILITY TO USE THE RPNB® SAFE.

How shall i talk to them?

Go to Your Orders, find your order in list, and click get product support.

You can e-mail the seller by doing the following:

Account&Lists Orders Try

Your Account

- Your Account
- Your Orders**
- Your Dash Buttons
- Your Lists

Your Orders

Orders Open Orders Digtal Orders

1 order placed in past 6 months

Get product soppart

- Write a product review
- Archive order

Talk to an expert

Figure out and fix what' s wrong,get s

- phone
- chat

if a new window doesn' t appear, chang

- 1.Go to your account find the order
- 2.Find your order item
- 3.Click get product support
- 4.Give the seller 24hours to respond

 Please email us to get a special **VIP** discount code before your next order.

 Problem with the order? Please email us, give us a chance to help you firstly.

 **Satisfied with us.**

Hum, this people is nice, i can give them a positive reviews to tell people they are selling good products, doing the right thing.



RPTB[®]

Dear Customer:
Thank for your business
— BEST WISHES FOR YOU —



Customer Support Hours:

Monday - Friday 9:00AM - 6:00PM (PST) Saturday - Sunday 9:00AM - 12:00PM (PST) Excluding Holidays

Hours subject to change

Customer Service Department Contact: customersupport@rpnbsafe.com